


RADIONIC

INDUSTRIES, INC.

ELECTRONIC BALLAST 4 LAMP, 2 LAMP, 1 LAMP RESIDENTIAL - NPF RAPID START F32T8, F25T8 and F34/40T12 Lamps

Candela
always on

800-922-9226

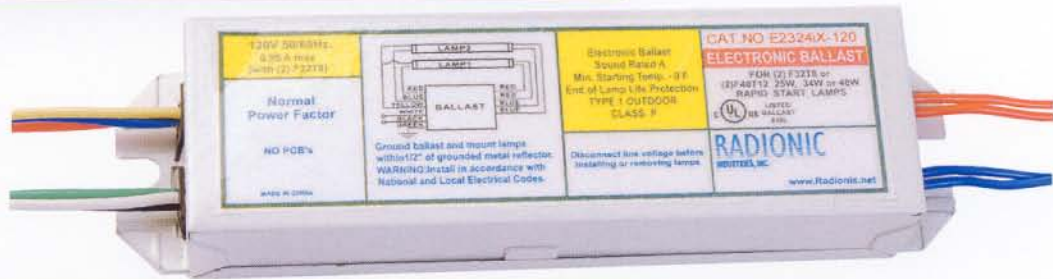

Key Benefits

- VALUE-PRICED
- FCC-B
- ENERGY STAR
- 2-YEAR WARRANTY
- CLASS P
- cULus LISTED

Features

- 120V, 50/60 Hz
- CREST FACTOR < 1.7
- THD < 130%
- NPF > 50%
- STARTING TEMP: 0° F
- END OF LIFE (EOL) PROTECTION

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Ballast Factor	Power Factor	Crest Factor
E4324iX-120	120V AC 50/60 Hz	F32T8	32	4	114	1.52	0.88	> 0.5	< 1.7
		F25T8	25	4	95.1	95.1	0.88	> 0.5	< 1.7
		F40T12	25/40	4	100.5	1.37	0.88	> 0.5	< 1.7
		F34T12	34	4	91.5	1.25	0.88	> 0.5	< 1.7
E2324iX-120	120V AC 50/60 Hz	F32T8	32	2	60.4	0.86	0.88	> 0.5	< 1.7
		F25T8	25	2	49	0.74	0.88	> 0.5	< 1.7
		F40T12	25/40	2	52.2	0.77	0.88	> 0.5	< 1.7
		F34T12	34	2	50	0.74	0.88	> 0.5	< 1.7
E1324iX-120	120V AC 50/60 Hz	F32T8	32	1	28.1	0.41	0.88	> 0.5	< 1.7
		F25T8	25	1	23	0.32	0.88	> 0.5	< 1.7
		F40T12	25/40	1	23.2	0.36	0.88	> 0.5	< 1.7
		F34T12	34	1	21.1	0.34	0.88	> 0.5	< 1.7

Enclosure Dimension (inches)

	Length (L)	Width (W)	Height (H)	Mounting (M)
E4324iX-120	9.5	1.7	1.2	9.0
E2324iX-120	6.6	1.7	1.0	6.0
E1324iX-120	6.6	1.7	1.0	6.0

