

Specifications

Part Number:	10-0201 Surelite™ Electronic Ballast, Thermally Protected	
Performance:	Meets FCC Part 18 Class A for RFI & EMI	
Starting Mode:	Instant Start	
Lamp Type:	GX48L or GX48VZ	
Input Line Voltage:	120 Volts AC ± 10%	
Line Frequency:	50/60 Hertz	
ATHD:	Meets ANSI C82.11-1993	
Current (Max.):	1.82 Amps	
Power (Max.):	220 Watts	
Power Factor:	High (>90%)	
Protection – Over Current:	Internal Fuse	
Protection – Voltage Transients:	MOV (per ANSI C82.11-1993)	
Open Circuit Voltage (Max.):	600 Volts RMS	
Ballast Start Temperature (Min.):	– 20°F (– 28°C)	
Ballast Case Temperature (Max.):	158°F (70°C)	
Sound Rating:	A	
Weight:	32.8-ounces	
Lead Length:	Black/White – 18"	Red – 60"/Blue – 24"/Yellow – 120"

Application Notes

1. Ground case in accordance with the National Electric Code.
2. Remote mounting distance varies with lamp type, consult factory with requirements.

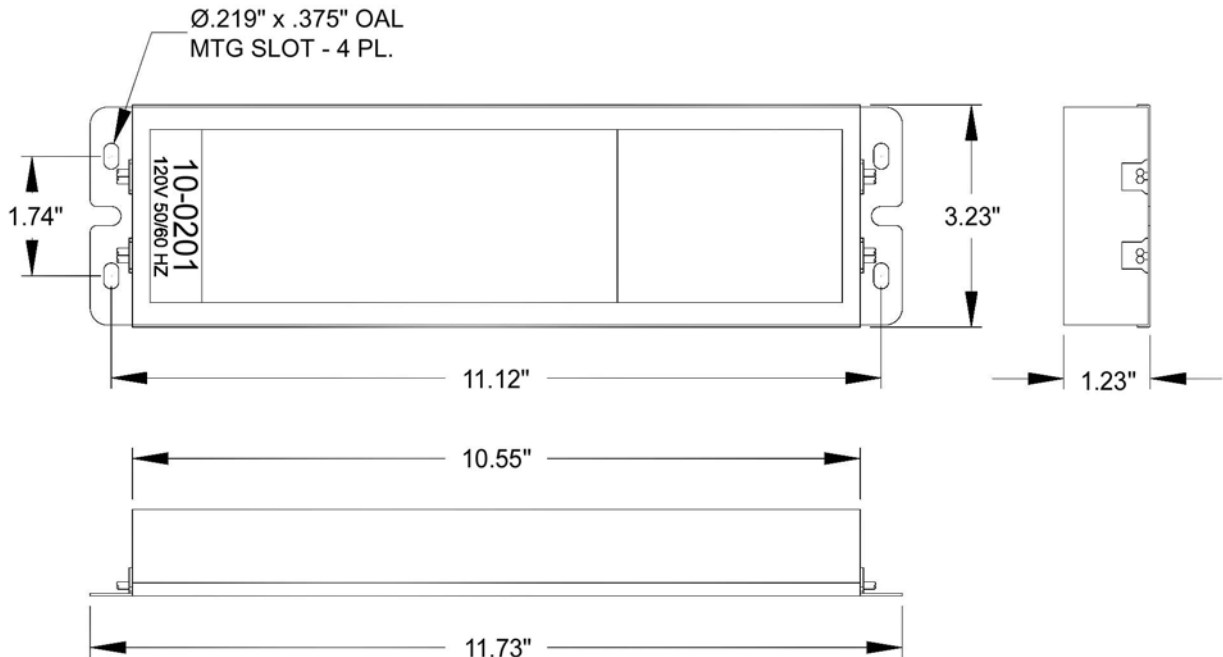


Figure 1- Dimensional Data

Connections

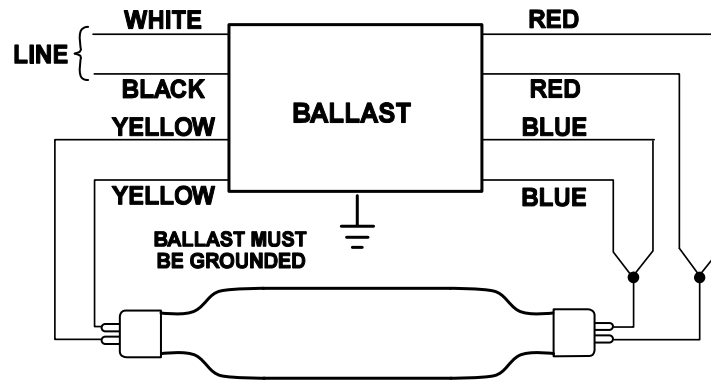


Figure 2 – Wiring Diagram