

# PL H 10.5W BYP

TITANIUM LED SERIES



PL:EDGE  
SERIES

PRO




10.5W REPLACES



26W  
CFL

60% Energy Savings

- HYBRid installation - DIReCT or BYPass
- Compatible with magnetic ballasts - DIReCT installation
- Built-in universal voltage driver - BYPass installation
- Compatible with G24d, GX24d, G24q & GX24q bases
- Exceptional efficacy 89 LPW
- Lasts 4 times longer than CFL



LM 79

LM 80


TM 21




## PL PRODUCT FEATURES

### BYPass Installation - Electronic Ballasts

This PL H lamp is not compatible with electronic ballasts and requires bypassing the ballast during installation. The lamp runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

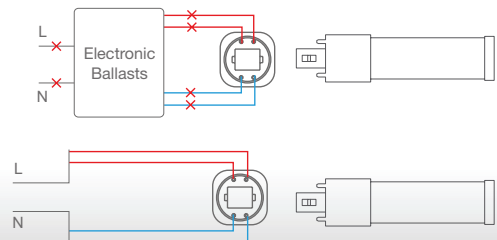

### HYBRid Installation - DIReCT or BYPass - Magnetic Ballasts

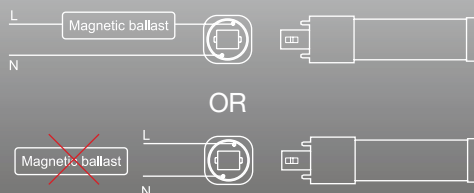


When used with a magnetic ballast, the PL H can function as a plug & play lamp and operate with the existing ballast. If the ballast is not compatible, it can be bypassed and the lamp can run directly off line voltage.

# PL H 10.5W BYP TITANIUM LED SERIES




## APPLICATIONS


### Retail

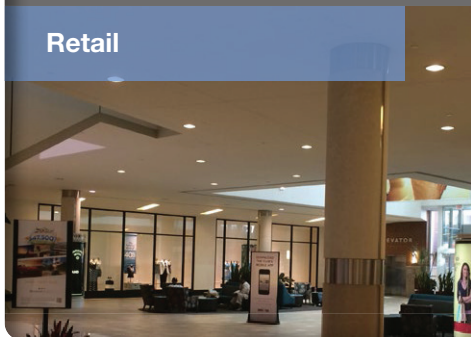

### Hospitality

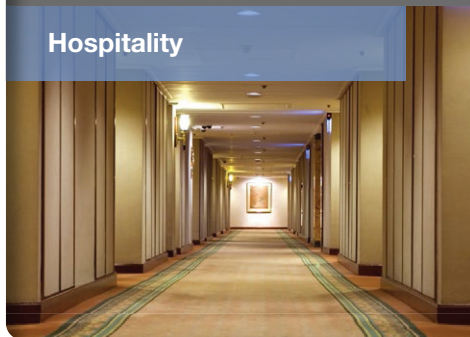


### Office

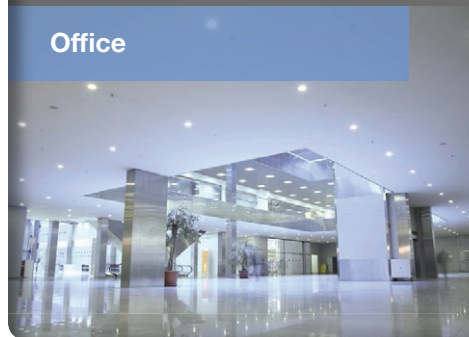

Ref.#: DS155-PLH-10.5W-BYP

**Base:** G24d, GX24d, G24q & GX24q (2/4-pin CFL)  
**Voltage:** Magnetic ballast compatible  
 120-277V  
**Dimmable:** No  
**PF:** 0.9  
**Lifetime:** 40,000 hrs  
**Weight:** 0.18lb / 82g

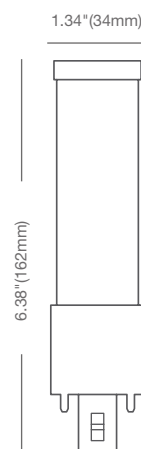

## SPECIFICATIONS\*

| Model           | Product | Power (W) | CCT                 | CRI (typ.) | Lumens | LPW | Beam Angle |
|-----------------|---------|-----------|---------------------|------------|--------|-----|------------|
| 10.5PLH/827/BYP | 57906   | 10.5      | Soft White 2700K    | 80         | 870    | 83  | 110°       |
| 10.5PLH/830/BYP | 57907   | 10.5      | Warm White 3000K    | 80         | 920    | 88  | 110°       |
| 10.5PLH/835/BYP | 57908   | 10.5      | Neutral White 3500K | 80         | 920    | 88  | 110°       |
| 10.5PLH/840/BYP | 57909   | 10.5      | Cool White 4000K    | 80         | 935    | 89  | 110°       |

\* Specification data is preliminary and may be subject to change

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

\*\*\* Not intended for use in enclosed fixtures

\*\*\*\* Full installation guide and more details available on website