


PL H 10.5W BYP TITANIUM LED SERIES



10.5W REPLACES




**26W
CFL**

60% Energy Savings

PRO




- ⌚ **HYBRid installation - DIrect or BYPass**
- ⌚ **Compatible with magnetic ballasts - DIrect installation**
- ⌚ **Built-in universal voltage driver - Bypass installation**
- ⌚ **Compatible with G24d, GX24d, G24q & GX24q bases**
- ⌚ **Exceptional efficacy 89 LPW**
- ⌚ **Lasts 4 times longer than CFL**




PL PRODUCT FEATURES

BYPass Installation - Electronic Ballasts

This PL H lamp is not compatible with electronic ballasts and requires bypassing the ballast during installation. The lamp runs directly off line voltage to eliminate compatibility problems, incidental power loss, lifetime issues, and maintenance costs associated with ballasts.

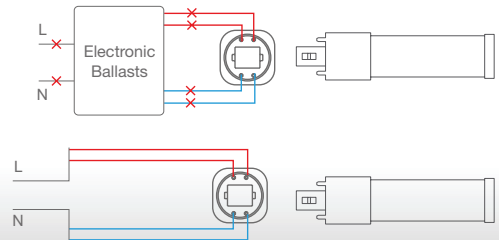

HYBRid Installation - DIrect or BYPass - Magnetic Ballasts

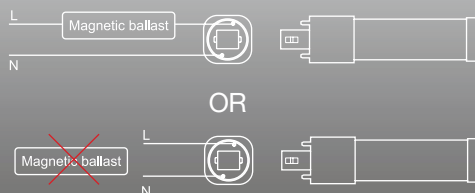


When used with a magnetic ballast, the PL H can function as a plug & play lamp and operate with the existing ballast. If the ballast is not compatible, it can be bypassed and the lamp can run directly off line voltage.

PL H 10.5W BYP TITANIUM LED SERIES




APPLICATIONS


Retail

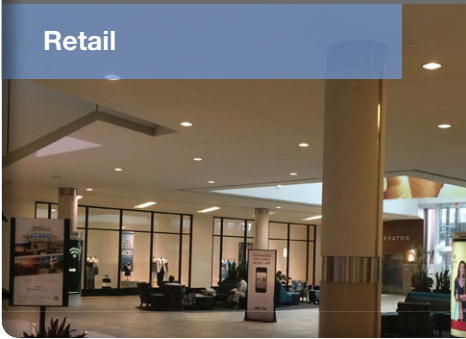


Hospitality

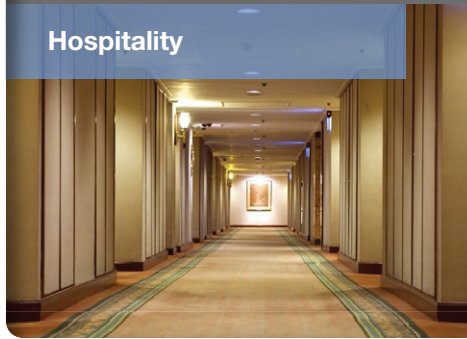

Office

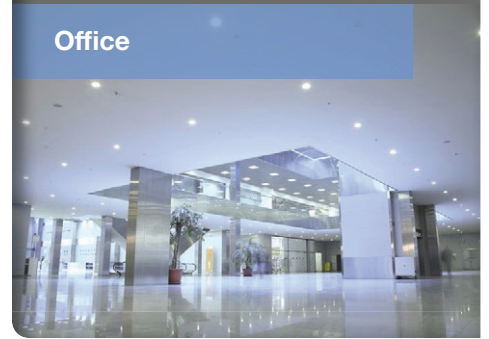

- Base:** G24d, GX24d, G24q & GX24q (2/4-pin CFL)
- Voltage:** Magnetic ballast compatible
120-277V
- Dimmable:** No
- PF:** 0.9
- Lifetime:** 40,000 hrs
- Weight:** 0.18lb / 82g

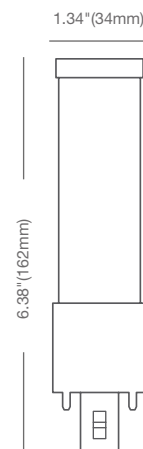

Ref.#: DS155-PLH-10.5W-BYP

SPECIFICATIONS*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
10.5PLH/827/BYP	57906	10.5	Soft White 2700K	80	870	83	110°
10.5PLH/830/BYP	57907	10.5	Warm White 3000K	80	920	88	110°
10.5PLH/835/BYP	57908	10.5	Neutral White 3500K	80	920	88	110°
10.5PLH/840/BYP	57909	10.5	Cool White 4000K	80	935	89	110°

* Specification data is preliminary and may be subject to change
 ** Suitable for damp locations. Not for use where directly exposed to weather or water
 *** Not intended for use in enclosed fixtures
 **** Full installation guide and more details available on website