


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

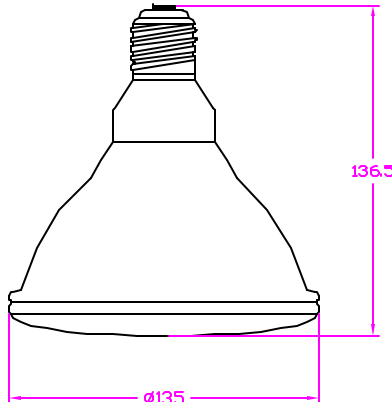

- NOTES:
1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
  2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
  3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	90 W
LUMENS	1280 Lm
BEAM ANGLE	50°
BEAM SPREAD	WIDE FLOOD
CENTER BEAM	3200 cp
AVERAGE LIFE	2500 HRS
BASE TYPE	E-28 MED/LM
BURN POSITION	ANY

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		<b>USHIO AMERICA, INC.</b> 10550 Camden Dr. Cypress, CA 90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS			
ANGLES ±		DATE		TITLE	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DRAWN			
MATERIAL		ENGR		90PAR38/WFL HALOGEN LAMP	
FINISH		CHKD			
COMPOSITE		DATE		SIZE	
		DRAWN		CODE IDENT NO.	
		ENGR		DWG NO.	
		CHKD		1001558	
		DATE		SCALE	
		DRAWN		NONE	
		ENGR		WEIGHT	
		CHKD		SHEET	
		DATE		1 OF 1	