

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacor.com

Customer Name:
Project Name:
Fixture Type:





GE
Lighting

47261 - 100A/RS/STGPQ1/6

GE Rough Service Worklight Saf-T-Gard® A21 - Shatter-Resistant; Rough Service

- GE's specialty bulbs offer innovative solutions for a variety of lighting needs.
- Shatter Resistant Bulb - Protective coating helps contain glass fragments if broken.

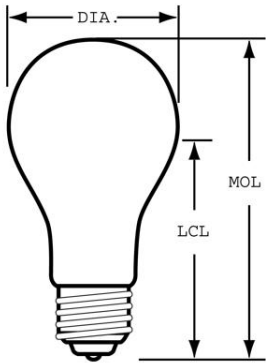

CAUTIONS & WARNINGS

Warning

- Risk of Fire
- Keep combustible materials away from lamp.

NOTES

- Lamp base is a brass base (BB).
- Will operate in any burning position, but fixed-socket usage other than base up or continuous burning in any position in ambient temperatures above 150 degrees F (66 degrees C), may result in some loss of protective coating. Reflectors and accessories may

GENERAL CHARACTERISTICS

Lamp Type	Incandescent - A-line
Bulb	A21
Base	Medium Screw (E26)
Filament	C-17
Wattage	100
Voltage	120
Rated Life	1000 hrs
Base Material	Brass
Primary Application	Shatter-Resistant; Rough Service

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1230
Nominal Initial Lumens per Watt	12

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
---------------	----------------------------

DIMENSIONS

Maximum Overall Length (MOL)	5.25 cm
Bulb Diameter (DIA)	2.625 cm
Bulb Diameter (DIA) (MAX)	2.625 cm
Light Center Length (LCL)	3.81 cm

PRODUCT INFORMATION

Product Code	47261
Description	100A/RS/STGPQ1/6
Standard Package	BUNDLE
Standard Package GTIN	00043168472616
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	30
UPC	043168904254