

**Presented By:** Candela Corporation  
Contact Phone: (800) 922-9226  
Contact E-mail: sales@candelacorp.com

Customer Name:  
Project Name:  
Fixture Type:




GE  
Lighting

### 44540 - 100F20/TF PQ1/6

#### GE F20

- Designed with a unique all-weather construction, they withstand harsh weather conditions better than regular bulbs.
- Shatter Resistant Bulb - Protective coating helps contain glass fragments if broken.
- Lasts twice as long as regular decorative bulbs\*

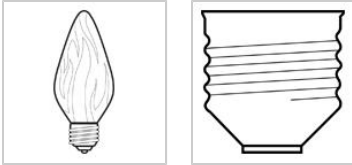

\*Two year life based on rated life at 4 hours/day.

#### GENERAL CHARACTERISTICS

Lamp Type	Incandescent - Decorative
Bulb	F20
Base	Medium Screw (E26)
Filament	CC-9
Bulb Finish	Clear
Wattage	100
Voltage	120
Rated Life	3000 hrs
Primary Application	Post Light

#### DIMENSIONS

Maximum Overall Length (MOL)	5.0000 in(127.0 mm)
Bulb Diameter (DIA)	2.500 in(63.5 mm)
Bulb Diameter (DIA) (MAX)	2.500 in(63.5 mm)

#### PRODUCT INFORMATION

Product Code	44540
Description	100F20/TF PQ1/6
Standard Package	BUNDLE
Standard Package GTIN	00043168445405
Standard Package Quantity	30
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	30
UPC	043168272872