



T8

11.5T8/COR/36-840/MF14/G 10/1

Philips MainsFit (UL Type B) CorePro T8 LED tubes deliver high-quality, flicker free performance at an affordable price. The UL Type B LED tubes are designed with easy installation and long-term maintenance simplicity in mind. Upgrade your lighting to Philips and realize 50,000 hour LED lifetime backed by a 5-year, full replacement limited warranty.

Product data

General Information		Starting Time (Nom)	
Base	G13 [Medium Bi-Pin Fluorescent]		0.9 s
EU RoHS compliant	Yes	Warm Up Time to 60% Light (Nom)	0.9 s
Nominal Lifetime (Nom)	50000 h	UL Type	Type B - bypass the ballast
Switching Cycle	50000X	Power Factor (Nom)	0.9
		Voltage (Nom)	120-277 V
Light Technical		Temperature	
Color Code	841 [CCT of 4100K (841)]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	180 °	T-Ambient (Min)	-20 °C
Initial lumen (Nom)	1400 lm	T-Storage (Max)	65 °C
Color Designation	Cool White (CW)	T-Storage (Min)	-40 °C
Correlated Color Temperature (Nom)	4000 K	T-Case Maximum (Nom)	50 °C
Luminous Efficacy (rated) (Nom)	121.00 lm/W		
Color Consistency	<6	Controls and Dimming	
Color Rendering Index (Nom)	82	Dimmable	No
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical		Mechanical and Housing	
Input Frequency	50 to 60 Hz	Bulb Material	Glass
Power (Rated) (Nom)	11.5 W	Product Length	36 in
Lamp Current (Max)	101 mA	Bulb Shape	Tube, double-ended
Lamp Current (Min)	47 mA		

T8

Approval and Application


Energy Saving Product	Yes
Approbation Marks	UL certificate RoHS compliance DLC compliance
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	DLC Standard

Product Data

Order product name	11.5T8/COR/36-840/MF14/G 10/1
--------------------	-------------------------------

EAN/UPC - Product	046677535513
Order code	535518
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001934404
Net Weight (Piece)	0.250 kg
Model Number	9290019344



Dimensional drawing

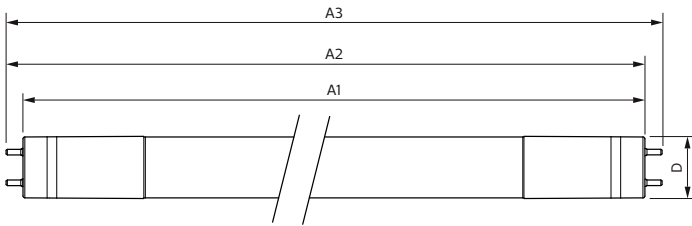

Product	D	A1	A2	A3
11.5T8/COR/36-840/MF14/G 10/1	25.9 mm	894.3 mm	900.5 mm	908.8 mm

TLED MF CorePro 3ft 1400lm 4000K

Photometric data

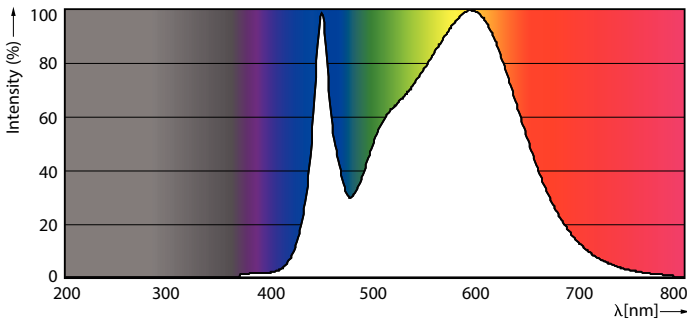


OSRAM Photometric 11.5W Lighting 11.5W Page 11

11.5W G13


11.5W

Photometric data

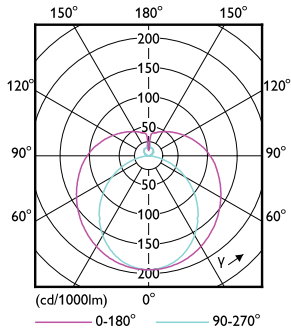


11.5W G13 840


Lifetime

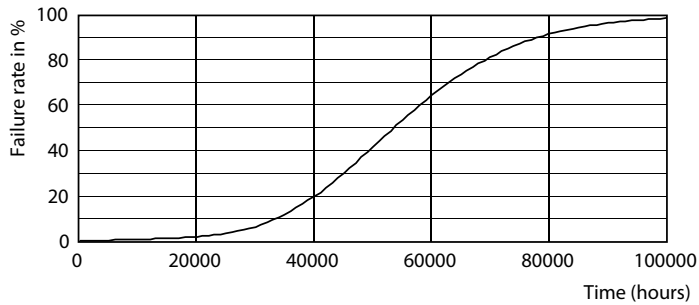


8.5W G13

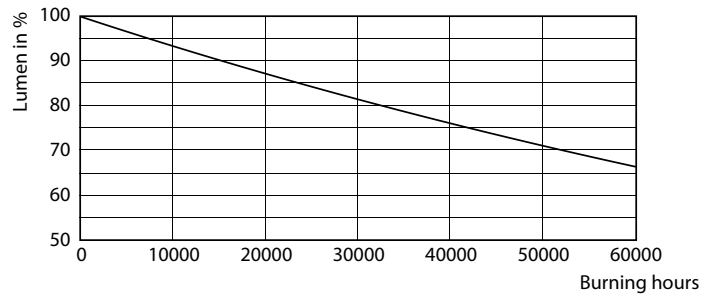

8.5W G13

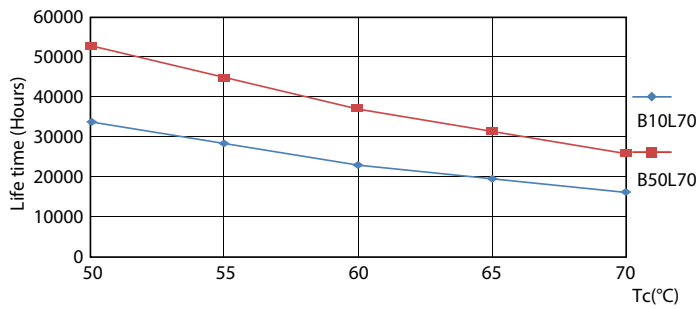


8.5W G13

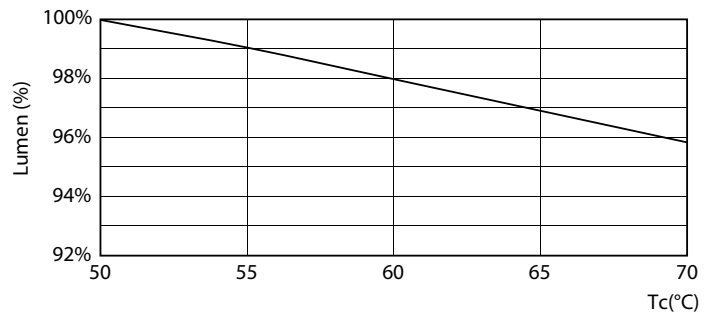

11.5W

T8

Lifetime

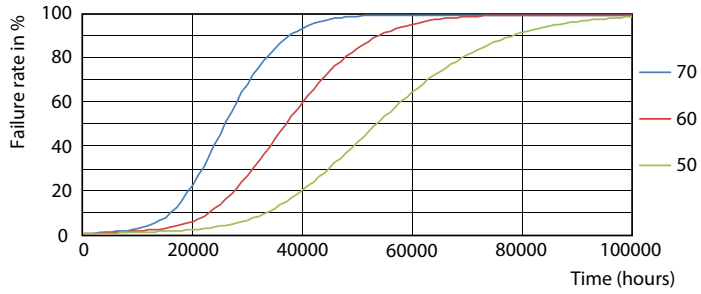

8.5W G13

