

A19 11W DIM. GU24 TITANIUM LED CRI^{SP} SERIES 4.0



CRI^{SP}




11W REPLACES



13W
CFL

20% Energy Savings


- Omnidirectional: 300° beam angle
- Exceptional color rendering CRI 92
- Richer reds and natural skin tones (R9 70, R13 95)
- Tight LED binning for consistent CCT across all lamps
- High efficacy 73 LPW in Warm White
- Comfortable warm diffused light




A19 GU24 PRODUCT FEATURES

Omnidirectional Lighting

This A19 meets the new ENERGY STAR V1.1 requirements for omnidirectional bulbs by providing 300° of evenly distributed light intensity. In the 135° to 180° zone, this lamp emits 65% more lumens than what is required by ENERGY STAR, providing a fuller light than other LED A-lamps.



CRI & CA Quality Specification

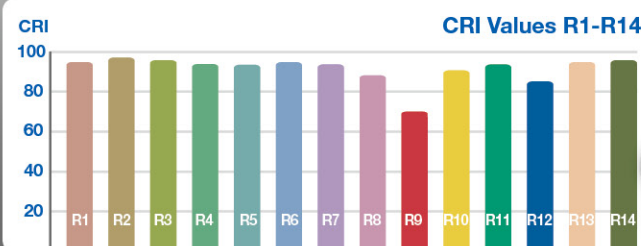

THE CRI^{SP} SERIES A19 11W GU24 lamp features a typical CRI 92, R9 70 and R13 95, providing crisp and vibrant colors across the whole spectrum. Its exceptional R9-R14 values (R9 & R13) provide redder reds, natural looking skin tones and whiter whites.

This lamp meets the California Quality Specification which requires a CRI of 90+ and demands color temperatures fall within a 4-step Macadam ellipse to ensure minimal color deviation across lamps.

A19 11W DIM. GU24

TITANIUM LED CRI^{SP} SERIES 4.0



APPLICATIONS

General Lighting



Downlighting



Uplighting



Ref.#:DS050-A19-11W-GU24

SPECIFICATIONS

Product	40739
Model	11A19G4DIM/927/GU24
Type	A19
Base	GU24
Power (W)	11
Voltage - Frequency	120V 60Hz
Color Temp. (ANSI)	Warm White 2700K
CRI (Ra) (typ.)	92
R9 / R13 (typ.)	70 / 95
Typical lumens (lm)	800
Efficacy (LPW)	73
Beam Angle	300°
Dimmable	Yes**
Power Factor	0.9
Rated Lifetime - L70 (hrs.)	25,000
Dia. x MOL	2.36"x4.49" (60x114mm)
Weight (lb. / g)	0.24lb / 107g

* Not intended for use in totally enclosed fixtures

** List of tested dimmer switches available on website

*** Suitable for damp locations. Not for use where directly exposed to weather or water