



Superior Light

- Powered by TRUE CHROMA
- Excellent color rendering
- High color fidelity Rf 93
- High CRI 95

Fresnel Technology


- Features Fresnel design to refine beam pattern
- Provides even light throughout the distribution with a crisp edge

Focus TIR Lens

- Maximizes delivered center beam candle power
- Increases system efficiency

Faceted Texture

- Minimizes glare
- Maximizes visual comfort

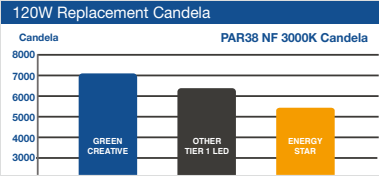

| SPECIFICATIONS |                           |       |        |            |     |        |     |        |            |            |          |       |             |                |
|----------------|---------------------------|-------|--------|------------|-----|--------|-----|--------|------------|------------|----------|-------|-------------|----------------|
| Product        | Model                     | CCT   | Lumens | CRI (typ.) | LPW | CBCP   | Dim | Equiv. | Beam Angle | Life (hrs) | Voltage  | Encl. | TRUE CHROMA | ES / JA8 / T20 |
| 35939          | 11PAR30SNDIM/930NF25/B •  | 3000K | 990    | 95         | 90  | 4,700  | Yes | 75W    | 25°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34911          | 11PAR30SNDIM/930FL40      | 3000K | 990    | 95         | 90  | 1,750  | Yes | 75W    | 40°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34912          | 11PAR30SNDIM/940FL40      | 4000K | 1,030  | 95         | 94  | 1,850  | Yes | 75W    | 40°        | 50,000     | 120V     | Yes   | No          | ✓ / ✓ / ✓      |
| 34913          | 11PAR30SNDIM/930FL40/B •  | 3000K | 990    | 95         | 90  | 1,750  | Yes | 75W    | 40°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34916          | 15.5PAR38DIM/927SP15      | 2700K | 1,320  | 95         | 85  | 14,000 | Yes | 120W   | 15°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34917          | 15.5PAR38DIM/927NF25      | 2700K | 1,320  | 95         | 85  | 6,750  | Yes | 120W   | 25°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34918          | 15.5PAR38DIM/927FL40      | 2700K | 1,320  | 95         | 85  | 2,800  | Yes | 120W   | 40°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34919          | 15.5PAR38DIM/930SP15      | 3000K | 1,370  | 95         | 88  | 14,700 | Yes | 120W   | 15°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34920          | 15.5PAR38DIM/930NF25      | 3000K | 1,370  | 95         | 88  | 7,000  | Yes | 120W   | 25°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34921          | 15.5PAR38DIM/930FL40      | 3000K | 1,370  | 95         | 88  | 2,900  | Yes | 120W   | 40°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34922          | 15.5PAR38DIM/940FL40      | 4000K | 1,420  | 95         | 92  | 3,000  | Yes | 120W   | 40°        | 50,000     | 120V     | Yes   | No          | ✓ / ✓ / ✓      |
| 34923          | 15.5PAR38DIM/930NF25/B •  | 3000K | 1,370  | 95         | 88  | 7,000  | Yes | 120W   | 25°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34924          | 15.5PAR38DIM/930FL40/B •  | 3000K | 1,370  | 95         | 88  | 2,900  | Yes | 120W   | 40°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34925          | 15.5PAR38DIM/930FL40/GU24 | 3000K | 1,370  | 95         | 88  | 2,900  | Yes | 120W   | 40°        | 50,000     | 120V     | Yes   |             | ✓ / ✓ / ✓      |
| 34914          | 11PAR30/930FL40/277V      | 3000K | 990    | 95         | 90  | 1,750  | No  | 75W    | 40°        | 50,000     | 120-277V | Yes   |             | ✓ / N.A. / ✓   |
| 34915          | 11PAR30/940FL40/277V      | 4000K | 1,030  | 95         | 94  | 1,850  | No  | 75W    | 40°        | 50,000     | 120-277V | Yes   | No          | ✓ / N.A. / ✓   |
| 34926          | 15.5PAR38/930FL40/277V    | 3000K | 1,370  | 95         | 88  | 2,900  | No  | 120W   | 40°        | 50,000     | 120-277V | Yes   |             | ✓ / N.A. / ✓   |
| 34927          | 15.5PAR38/940FL40/277V    | 4000K | 1,420  | 95         | 92  | 3,000  | No  | 120W   | 40°        | 50,000     | 120-277V | Yes   | No          | ✓ / N.A. / ✓   |

• Black finish