



## T-2 Telephone Slide Base - Type 3

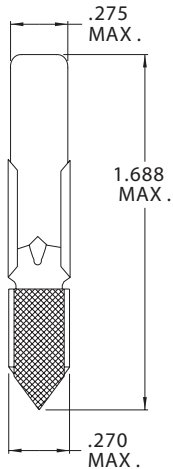

| Part Number | Design Voltage | Amps | MSCP  | Life Hours | Filament Type |
|-------------|----------------|------|-------|------------|---------------|
| CM24D       | 24.0           | .100 | 1,500 | 5,000      | C-7A          |
| CM24E       | 24.0           | .035 | 600   | 7,000      | C-2F          |
| CM24F       | 24.0           | .090 | 1,120 | 7,000      | C-2F          |
| CM24H       | 24.0           | .020 | 100   | 10,000     | C-2F          |
| CM24X       | 24.0           | .035 | 600   | 8,000      | C-2F          |
| CM30A       | 30.0           | .072 | 2,000 | 3,000      | C-7A          |
| CM30C       | 30.0           | .038 | 1,000 | 4,000      | C-2F          |
| CM32B       | 32.0           | .040 | 1,600 | 3,500      | C-2F          |
| CM30B       | 35.0           | .100 | 3,000 | 4,000      | C-7A          |
| CM35A       | 35.0           | .040 | 1,000 | 7,500      | C-2F          |
| CM35B       | 35.0           | .072 | 700   | 5,000      | C-7A          |
| CM35C       | 35.0           | .100 | 750   | 5,000      | C-7A          |
| CM40A       | 40.0           | .072 | 480   | 5,000      | C-7A          |
| CM44A       | 44.0           | .072 | 1,250 | 1,000      | C-7A          |
| CM48A       | 48.0           | .072 | 2,000 | 5,000      | C-7A          |
| CM48B       | 48.0           | .100 | 2,200 | 10,000     | C-7A          |
| CM48C       | 48.0           | .035 | 400   | 7,000      | C-7A          |
| CM48D       | 48.0           | .021 | 100   | 20,000     | C-7A          |
| CM48G       | 48.0           | .052 | 800   | 5,000      | C-7A          |
| CM48H       | 48.0           | .045 | 1,000 | 5,000      | C-7A          |
| CM55B       | 55.0           | .100 | 1,800 | 5,000      | C-7A          |
| CM55C       | 55.0           | .050 | 1,400 | 5,000      | C-7A          |
| CM60A       | 60.0           | .050 | 1,600 | 5,000      | C-7A          |

## T-2 Miniature Bayonet Base

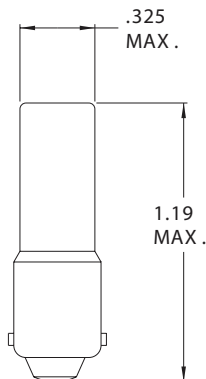

| Part Number | Design Voltage | Amps | MSCP  | Life Hours | Filament Type |
|-------------|----------------|------|-------|------------|---------------|
| CM6MB       | 6.0            | .140 | 550   | 20,000     | C-2V          |
| CM12MB      | 12.0           | .170 | 2,000 | 12,000     | C-2F          |
| CM24MB      | 24.0           | .073 | 3,000 | 10,000     | C-2F          |
| CM28MB      | 28.0           | .040 | 1,600 | 5,000      | C-2F          |
| CM48MB      | 48.0           | .053 | 1,800 | 10,000     | C-7A          |
| CM60MB      | 60.0           | .050 | 2,200 | 7,500      | C-7A          |
| CM120MB     | 120.0          | .025 | 1,200 | 5,000      | CC-7A         |
| CM8-967     | 120.0          | .025 | 1,200 | 5,000      | CC-7A         |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[60MB](#) [120MB](#) [28MB](#) [8-967](#) [24MB](#) [120MB-10PK](#) [24MB-10PK](#)