



CorePro MainsFit (UL Type-B) T8

12T8/COR/48-850/MF18/G/DIM 25/1

The CorePro MainsFit (UL Type B) lamps are designed to be the perfect retrofit solution to move from traditional fluorescent lamps to energy saving LEDs. This ballast bypass lamp has everything needed built into the lamp with proven energy savings, long life (up to 50k hours), surge suppression and industry leading safety features. All lamps in the CorePro MainsFit family are double-ended to help simplify the installation. In addition, all lamps meet the Philips standards for light quality so that end users will be in a comfortable environment regardless of the CorePro MainsFit lamp type.

Product data

General Information		Operating and Electrical	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Line Frequency	50 to 60 Hz
Nominal lifetime	50,000 hour(s)	Input Frequency	50 to 60 Hz
Switching Cycle	50,000	Power Consumption	12 W
Lighting Technology	LED	Lamp Current (Max)	104 mA
Light Technical		Lamp Current (Min)	48 mA
Color Code	850 [CCT of 5000K]	Wattage Equivalent	32 W
Beam Angle (Nom)	240 degree(s)	Starting Time (Nom)	0.5 s
Luminous Flux	1,800 lm	Warm-up time to 60% light	0.5 s
Color Designation	Daylight	Power Factor (Fraction)	0.9
Correlated Color Temperature (Nom)	5000 K	Voltage (Nom)	120-277 V
Luminous Efficacy (rated) (Nom)	150.00 lm/W	UL Type	UL Type B
Color Consistency	<5	Temperature	
Color rendering index (CRI)	80	T-Case Maximum (Nom)	158 °F
LLMF At End Of Nominal Lifetime (Nom)	70 %		

CorePro MainsFit (UL Type-B) T8

Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	47-1/4 inch
Bulb Shape	T8
Net Weight (Piece)	0.441 lb

Approval and Application

Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance
EU RoHS compliant	Yes
Ambient temperature range	-4 °F to 113 °F


Application Conditions

can it be used in closed luminaires	Yes
-------------------------------------	-----

Product Data


Order product name	12T8/COR/48-850/MF18/G/DIM 25/1
Full product name	12T8/COR/48-850/MF18/G/DIM 25/1
Order code	579391
Material Nr. (12NC)	929003524404
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677579395
Numerator - Packs per outer box	25
EAN/UPC - Case	50046677579390

Dimensional drawing

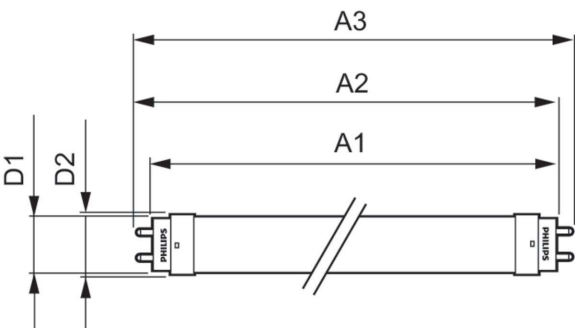


Product	D1	D2	A1	A2	A3
12T8/COR/48-850/MF18/G/DIM 25/1	1-1/16 inch	1-1/8 inch	47-3/16 inch	47-1/2 inch	47-3/4 inch

Photometric data




Light Distribution Diagram - 12T8/COR/48-850/MF18/G/DIM 25/1

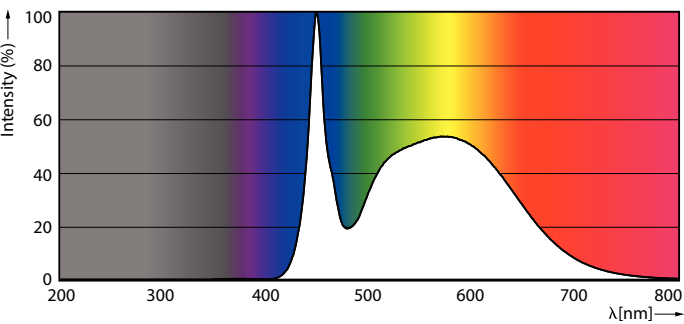

Spectral Power Distribution Colour - 12T8/COR/48-850/MF18/G/DIM 25/1



CorePro MainsFit (UL Type-B) T8

Photometric data




General uniform lighting - 12T8/COR/48-850/MF18/G/DIM 25/1


Lifetime

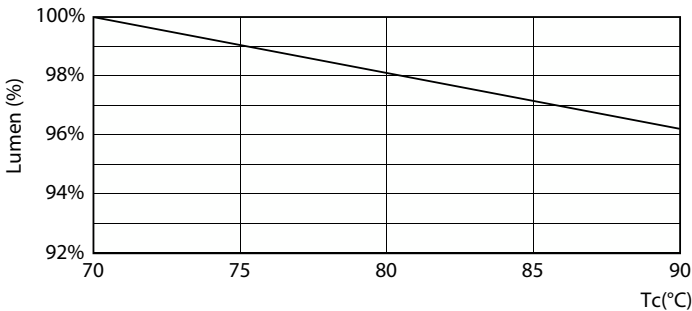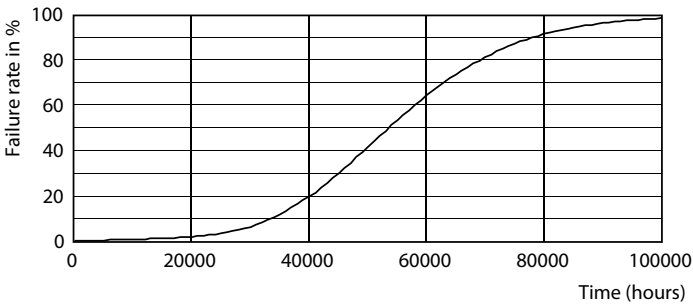

Life Expectancy Diagram

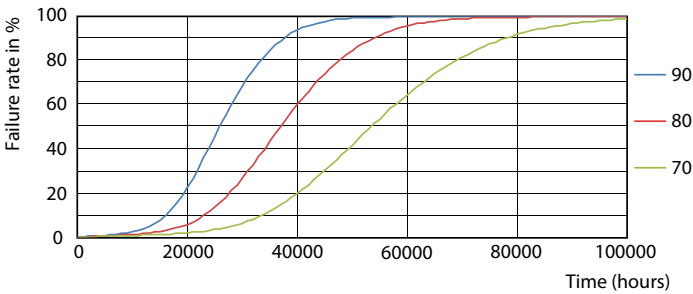

Lumen Maintenance Diagram - 12T8/COR/48-850/MF18/G/DIM 25/1

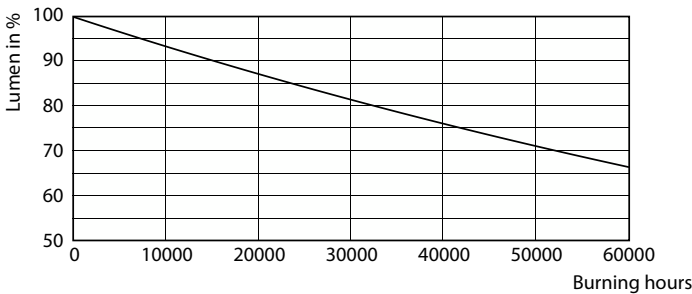


LEDtube 50K 7090 FailureRate-LED

Lumen Maintenance Diagram - 12T8/COR/48-850/MF18/G/DIM 25/1

CorePro MainsFit (UL Type-B) T8

Lifetime

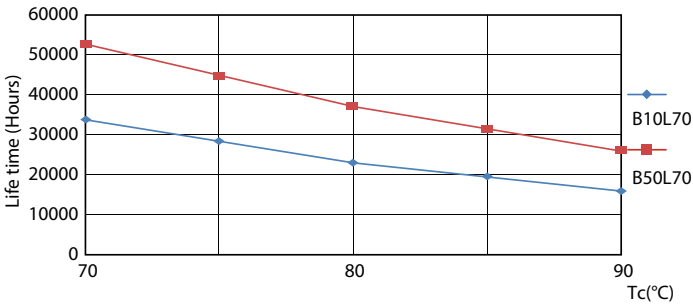

LifetimeVsTc

