

## Starter Base w/ leads



660W-250V **13285**

## Low Pressure Sodium



1000 Volts  
660 Watts

**12040**

**Body** - high temperature, flame retardant thermoset.

**Contacts** - electro tinned copper alloy.

**Leads** - 16 AWG stranded, 1000V, 9"

## Pig Tail Type


rubber medium base,



660W-250V


**23680**

## T8 & T12 "U-Back" Sockets & Caps

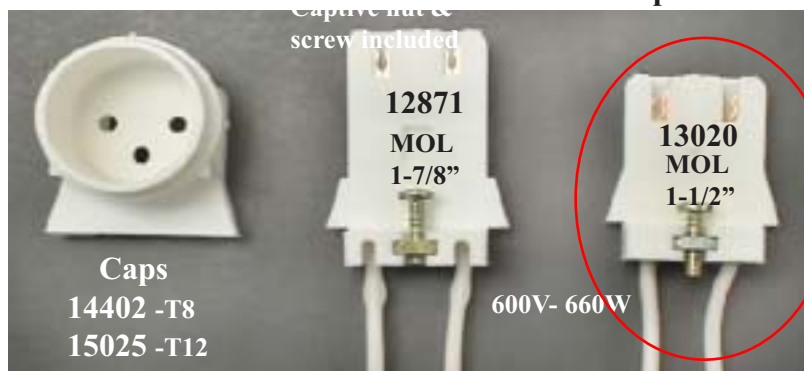

Caps

14402 -T8  
15025 -T12

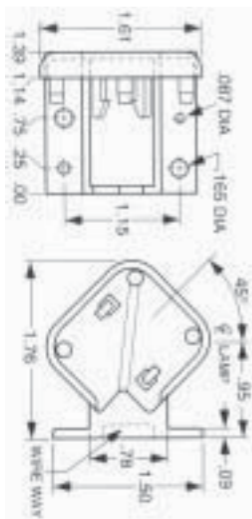


Angle base for  
4 pin multi socket



**23724**

Socket can be used alone or with the angle base.

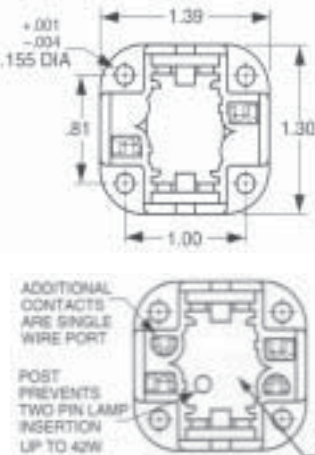

4-pin 10 & 13W

**29100** -G24q-1, Gx24q-1

## 4-Pin Multi Socket



4-pin 26, 32, 42W

**26138** -G24q, Gx24q-3, 4

**13010**

G23,G23-2



snap-in

Twin tube 5,7,9,11W

**10381**

GX23



13W

twin tube

snap-in

**12861**

G23



Twin tube 5,7,9,11W