



LED PAR38

13PAR38/LED/950/F25/DIM/GULW/T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data


| General Information | |
|---------------------------------------|------------------------------------|
| Cap-Base | E26 [Single Contact Medium Screw] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 25000X |
| Light Technical | |
| Color Code | 950 [CCT of 5000K] |
| Beam Angle (Nom) | 25 ° |
| Luminous Flux (Nom) | 1200 lm |
| Luminous Intensity (Nom) | 6000 cd |
| Color Designation | Daylight [Daylight] |
| Correlated Color Temperature (Nom) | 5000 K |
| Luminous Efficacy (rated) (Nom) | 92.00 lm/W |
| Color Consistency | <4 |
| Color Rendering Index (Nom) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Operating and Electrical | |
| Input Frequency | 50 to 60 Hz |
| Power (Rated) (Nom) | 13 W |
| Lamp Current (Nom) | 120 mA |
| Wattage Equivalent | 120 W |
| Starting Time (Nom) | 0.5 s |

| Warm Up Time to 60% Light (Nom) | 0.5 s |
|---------------------------------|--|
| Power Factor (Nom) | 0.9 |
| Voltage (Nom) | 120 V |
| Temperature | |
| T-Case Maximum (Nom) | 75 °C |
| Controls and Dimming | |
| Dimmable | Only with specific dimmers |
| Mechanical and Housing | |
| Bulb Shape | PAR38 [PAR 4.75 inch/121mm] |
| Approval and Application | |
| Suitable For Accent Lighting | Yes |
| Product Data | |
| Order product name | 13PAR38/LED/950/F25/DIM/GULW/T20 6/1FB |
| EAN/UPC - Product | 046677567781 |
| Order code | 567784 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 6 |
| Material Nr. (12NC) | 929003029904 |

LED PAR38

| | |
|--------------------|----------|
| Net Weight (Piece) | 0.385 kg |
|--------------------|----------|


Dimensional drawing




13PAR38/LED/950/F25/DIM/GULW/T20 6/1FB

| Product |
|--|
| 13PAR38/LED/950/F25/DIM/GULW/T20 6/1FB |


Photometric data

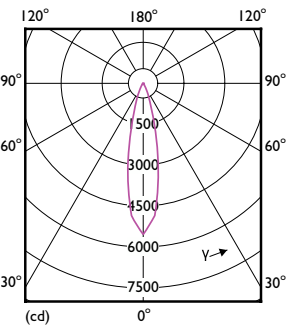

LEDspots N DIM 13W PAR38 E26 950 25D-LDD

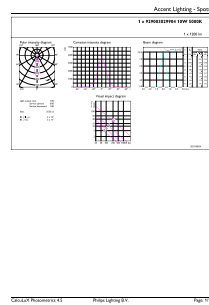

LEDspots N DIM 13W PAR38 E26 950 25D 1-ADL

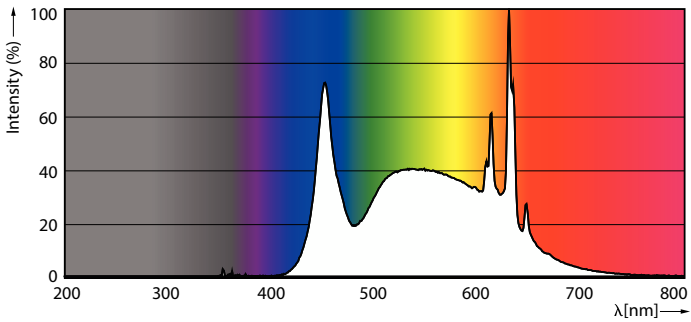

LEDspots N DIM 13W PAR38 E26 950 25D-POC

LED PAR38

Lifetime



LEDspots LED 25K



LEDspots LMP 25K

