



LED Corn Cobs

145CC/LED/3CCT/LS EX39 BB 3/1

Philips Corn Cob LED replacement lamps are perfect LED replacement for a variety of outdoor applications. High intensity illumination, which means you get added visibility for applications like streets, public areas, and much more for a fraction of the energy used by conventional HID.

Product data

General Information	
Cap-Base	EX39 [Exclusionary Mogul Screw]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Light Technical	
Color Code	3000K/4000K/5000K
Luminous Flux	20,500 22,000 22,000 lm
Color Designation	3000K/4000K/5000K
Correlated Color Temperature (Nom)	3000 4000 5000 K
Luminous Efficacy (rated) (Nom)	151 lm/W
Color Consistency	<3
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	145 W
Lamp Current (Nom)	1,300 mA
Starting Time (Nom)	2 s
Warm-up time to 60% light	1 s
Power Factor (Fraction)	0.9


Voltage (Nom)	120-277 V
UL Type	HIB_UL Type B (UL classified+RU)
Temperature	
T-Case Maximum (Nom)	104 °F
Controls and Dimming	
Dimmable	Variac Dimming
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	Corncob
Net Weight (Piece)	1.984 lb
Approval and Application	
Photobiological risk	Photobiological risk group 1 @ 200mm to EN62471
EU RoHS compliant	Yes
Ambient temperature range	-4 to +131 °F
Application Conditions	
can it be used in closed luminaires	Yes

LED Corn Cobs

Product Data	
Order product name	145CC/LED/3CCT/LS EX39 BB 3/1
Full product name	145CC/LED/3CCT/LS EX39 BB 3/1
Order code	583708
Material Nr. (12NC)	929003631604
Numerator - Quantity Per Pack	1


EAN/UPC - Product/Case	046677583705
Numerator - Packs per outer box	3
EAN/UPC - Case	50046677583700

Dimensional drawing





Product	D	C
145CC/LED/3CCT/LS EX39 BB 3/1	4-1/16 inch	8-5/16 inch

Photometric data



LED Corn Cobs

Lifetime

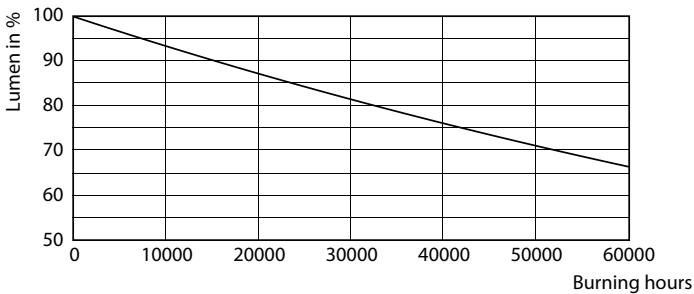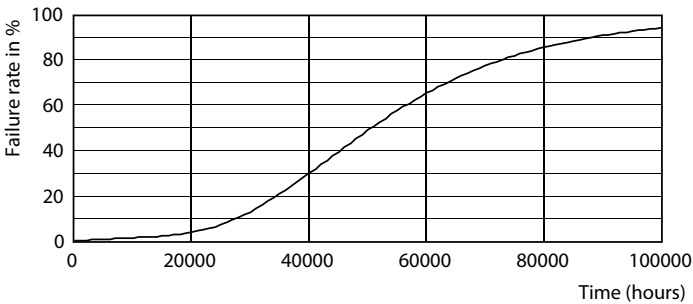

Life Expectancy Diagram

Lumen Maintenance Diagram - 145CC/LED/3CCT/LS EX39 BB 3/1

