


Incandescent Lamps

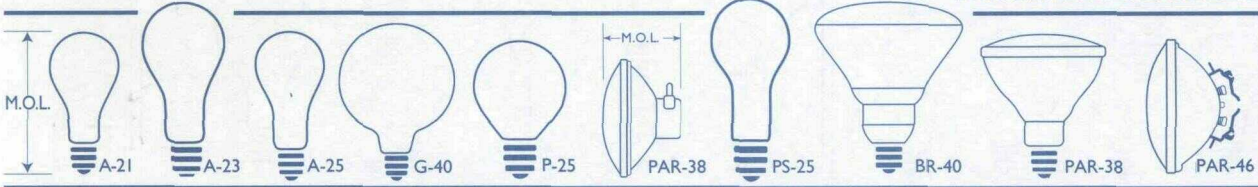

| Watts | Bulb | Base | Product Number 046677- | Ordering Code | Volts | Pkg. Qty. | Description | Class and Filament | L.C.L. (In.) | M.O.L. (In.) | Approximate | | | | |
|------------|--|------------------|--|------------------------|-------------------|-------------------|---|---|-------------------------------|--------------------------------|--------------------------------|--------------------------------|--------|------|------|
| | | | | | | | | | | | Hours Life | MBCP* | Lumens | | |
| 150 | A-21 | Med. ▲ | * 37417-3 | 150A/99 | 120-130 | 60 | Frost, Extended Service(82) | C, CC-8 | | 5 ¹ / ₁₆ | 2500 | | 2445 | | |
| | | | \$\$\$ — CONSIDER 150A-135A/99/EW 120 VOLT FOR ENERGY SAVINGS | | | | | | | | | | | | |
| | | | * 36659-1 | 150A/CL | 12/1 | 120 | 12 | Clear(82) | C, CC-8 | 3 ³ / ₁₆ | 5 ¹ / ₁₆ | 750 | | 2850 | |
| | | | * 37418-1 | 150A/CL | | 120-130 | 60 | Clear(82) | C, CC-8 | 3 ³ / ₁₆ | 5 ¹ / ₁₆ | 750 | | 2815 | |
| | | | X 32274-3 | 150A21/RS/TF | | 120 | 60 | Rough Service(82) | C, C-6 | | 5 ¹ / ₁₆ | 1000 | | | |
| | | | 27983-6 | 150A21/RS/TF | | 120-130 | 60 | High-Temp. Coating | C, RC-9 | | 5 ¹ / ₁₆ | 1000 | | | |
| | | | *♦ 27578-4 | 150A21/RS/BR | | 120-130 | 60 | Frost, Rough & Vib. Serv. | C, RC-9 | | 5 ¹ / ₁₆ | 1000 | | 2205 | |
| | | | *♦ 27560-7 | 150A21/CL/RS/VS | | 120-130 | 60 | Clear, Rough & Vib. Serv. | C, RC-9 | 3 ³ / ₁₆ | 5 ¹ / ₁₆ | 1000 | | 2200 | |
| | | | Med. *♦ 27580-3 | 150A/35/RS | | 120-130 | 60 | Frost, Indust. Rough Serv. | C, RC-9 | | 5 ¹ / ₁₆ | 3500 | | 1740 | |
| | | | A-23 | Med.L.H.T. | 28170-9 | 150A23/LHT | 120-130 | 60 | Frost(18) | C, CC-8 | | 6 ¹ / ₁₆ | 750 | | 2850 |
| | Med. ▲ * 37419-9 | 150A23/CL | | | | 120-130 | 60 | Clear | C, CC-8 | 4 ⁵ / ₁₆ | 6 ¹ / ₁₆ | 750 | | 2855 | |
| | A-25 | Med. | *□ 37421-5 | 150A25/35 | 120-130 | 60 | Frost, Industrial Service | C, C-9 | | 6 ¹ / ₁₆ | 3500 | | 1825 | | |
| | | | □ 22965-8 | 150A25/35/TF | | 120 | 60 | Industrial Service(14), Frost Silicone Coated | C, C-9 | | 6 ¹ / ₁₆ | 3500 | | | |
| | G-40 | Med. ▲ | 20265-5 | 150G40/4MW | 6/1 | 120 | 6 | White, Globe | C, C-9 | | 6 ¹ / ₁₆ | 4000 | | | |
| | \$\$\$ — CONSIDER 135A25/35 130 VOLT FOR ENERGY SAVINGS | | | | | | | | | | | | | | |
| | P-25 | Med. | 24938-3 | 150P25/2SB | | 120 | 60 | Clear, Spotlight, Silvered Bowl(31) | C, C-5 | | 4 ³ / ₁₆ | 200 | | | |
| | | | 23654-7 | 150P25/10 | | 120 | 60 | Light Frost, Spotlight(23) | C, C-5 | 3 | 4 ³ / ₁₆ | 200 | | 2100 | |
| | PAR-38 | Med.Skt. | 37423-1 | 150PAR38/2FL | | 120-130 | 12 | *PAR Cool Beam Flood (4)(52)(12) | C,CC-6 | | 5 ¹ / ₁₆ | 2000 | | | |
| | | | Med.Side Prong | 37424-9 | 150PAR/3FL | | 120-130 | 12 | *PAR Comp. Flood(32)(90) | C, CC-6 | | 5 ¹ / ₁₆ | 2000 | | |
| | | | 26980-3 | 150PAR/3VWFL | | 120-130 | 12 | *PAR Very Wide Flood Mine (32)(71)(90) | C, C-13 | | 4 ⁵ / ₁₆ | 2000 | | | |
| | | 24440-0 | 150PAR/3SP | | 120-130 | 12 | *PAR Comp. Spot(32)(90) | C, CC-6 | | 4 ⁵ / ₁₆ | 2000 | | | | |
| | | 23334-6 | 150PAR/4FL | | 120-130 | 12 | *PAR Flood, Anti-Vibration (32)(71)(90) | C, C-13 | | 4 ⁵ / ₁₆ | 2000 | | | | |
| | | Med.Skt. | 23315-5 | 150PAR/5FL | | 120-130 | 12 | *PAR Flood, Anti-Vibration(90) | C, C-13 | | 5 ¹ / ₁₆ | 2000 | | | |
| | PAR-46 | M-P. | 23340-3 | 150PAR46/1 | | 32 | 12 | *PAR Headlight, Rounded Cover | C, CC-8 | | 3 ³ / ₁₆ | 1000 | | | |
| | | | 23345-2 | 150PAR46 | | 120-130 | 12 | *PAR Mine Locomotive Headlight(33) | C, C-13 | | 3 ³ / ₁₆ | 1000 | | | |
| | PS-25 | Med. ▲ | ♦ 28173-3 | 150 | | 120-130 | 60 | Frost | C, C-9 | | 6 ¹ / ₁₆ | 750 | | 2460 | |
| | | | 30056-6 | 150PS25/TF | | 120 | 60 | Frost Silicone Coated | C, C-9 | | 6 ¹ / ₁₆ | 1000 | | | |
| | | | ♦ 28174-1 | 150PS25/99 | | 120-130 | 60 | Frost, Extended Service | C, C-9 | | 6 ¹ / ₁₆ | 2500 | | 2080 | |
| 22597-9 | | | 150/CL | | 130 | 60 | Clear | C, C-9 | 5 ¹ / ₄ | 6 ¹ / ₁₆ | 750 | | 2475 | | |
| 24684-3 | | | 150PS25/99CL | | 250 | 60 | Clear, Extended Service | C, CC-9 | | 6 ¹ / ₁₆ | 2500 | | 1840 | | |
| 37425-6 | | | 150/SB | | 120-130 | 60 | Frost, Silvered Bowl(31)(43) | C, CC-9 | | 6 ¹ / ₁₆ | 1000 | | 2250 | | |
| BR-40 | Med. ▲ | 22736-3 | 150BR/B | | 120 | 24 | Blue(87) | C, CC-6 | | 6 ¹ / ₂ | 2000 | | | | |
| | | 22733-0 | 150BR/PK | | 120 | 24 | Pink(87) | C, CC-6 | | 6 ¹ / ₂ | 2000 | | | | |
| | | 22730-6 | 150BR/R | | 120 | 24 | Red(87) | C, CC-6 | | 6 ¹ / ₂ | 2000 | | | | |
| | | 22651-4 | 150BR/Y | | 120 | 24 | Yellow(87) | C, CC-6 | | 6 ¹ / ₂ | 2000 | | | | |
| | | 22725-6 | 150BR/AGRO | 6/1 | 120 | 6 | Agro-Lite Plant Light(87) | C, CC-6 | | 6 ¹ / ₂ | 2000 | | | | |
| A-21 | Med. ▲ | □ 20443-8 | 150A/WL | 12/1 | 120 | 12 | Longer Life Soft White | C, CC-8 | | 5 ¹ / ₁₆ | 1000 | | 2650 | | |

□ Exclusive Philips Product \$\$\$ — Energy Saving Product *Maximum Beam Candlepower
 Footnotes located on page 47 *♦ For more information when operated at 120V see pages 45-47
 X — Orders will be shipped until inventory is depleted; no longer manufactured ▲ Aluminum Base