

T8

16.5T8/CNG/48-850/MF21/G 25/1


Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

Product data

General information		Power (Rated) (Nom)	
Base	G13 [Medium Bi-Pin Fluorescent]	16.5 W	
EU RoHS compliant	Yes	Lamp Current (Max)	
Nominal Lifetime (Nom)	50000 h	134 mA	
Switching Cycle	50000	Lamp Current (Min)	
Tier	CorePro	58 mA	
Light technical		Starting Time (Nom)	
Color Code	850 [CCT of 5000K]	0.5 s	
Beam Angle (Nom)	240 °	Warm Up Time to 60% Light (Nom)	
Initial lumen (Nom)	2100 lm	0.5 s	
Color Designation	Daylight	UL Type	
Correlated Color Temperature (Nom)	5000 K	TLED_Type B; UL classified double end	
Luminous Efficacy (rated) (Nom)	127.00 lm/W	Power Factor (Nom)	
Color Consistency	<5	0.9	
Color Rendering Index (Nom)	80	Voltage (Nom)	
LLMF At End Of Nominal Lifetime (Nom)	70 %	120-277 V	
Operating and electrical		Temperature	
Input Frequency	50 to 60 Hz	T-Ambient (Max)	
		113 °F	
		T-Ambient (Min)	
		-4 °F	
		T-Storage (Max)	
		149 °F	
		T-Storage (Min)	
		-40 °F	
		T-Case Maximum (Nom)	
		158 °F	
		Controls and dimming	
		Dimmable	
		Limited	


Mechanical and housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	47-1/4 in
Bulb Shape	Tube, double-ended
Approval and application	
Energy Saving Product	Yes
Approbation Marks	RoHS compliance UL certificate DLC compliance

Dimensional drawing

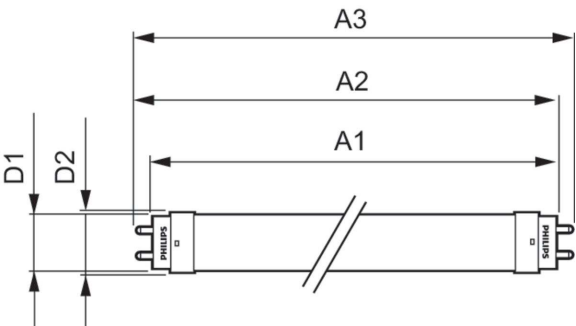

16.5T8/BCP/48-850/MF21/G 25/1


Photometric data



LEDtube BCP NAM 16,5W G13 2100lm 850-GUL


Product data	
Order product name	16.5T8/CNG/48-850/MF21/G 25/1
EAN/UPC - Product	046677579067
Order code	579060
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	929003510804
Net Weight (Piece)	0.419 lb

Product	D1	D2	A1	A2	A3
16.5T8/BCP/48-850/MF21/G 25/1	1-1/16 in	1-1/8 in	47-3/16 in	47-1/2 in	47-3/4 in

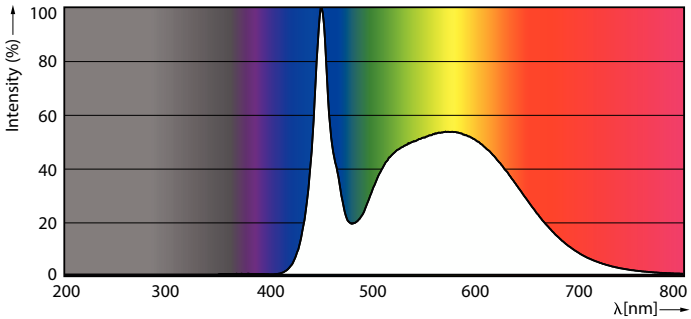


LEDtube BCP NAM 16,5W G13 2100lm 850-POC

Photometric data




LEDtube BCP NAM 16,5W G13 2100lm 1-LDD


Lifetime

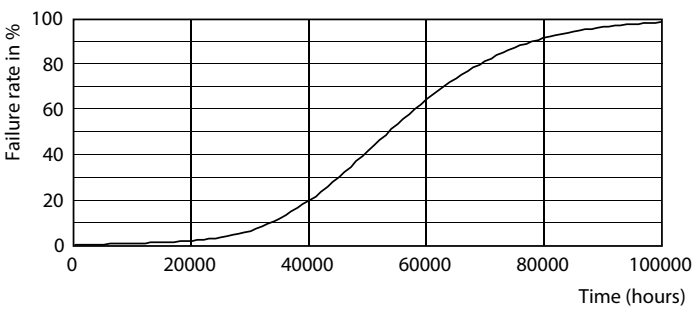


Life Expectancy Diagram

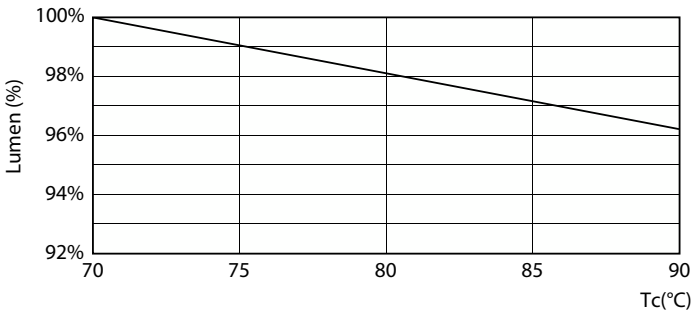

LEDtube BCP NAM 16,5W 50K LumenVsTc-LMP

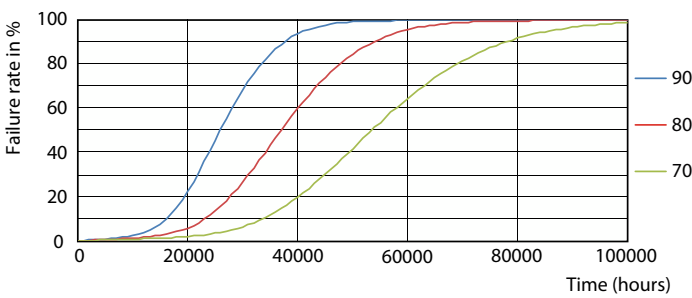

FailureRate

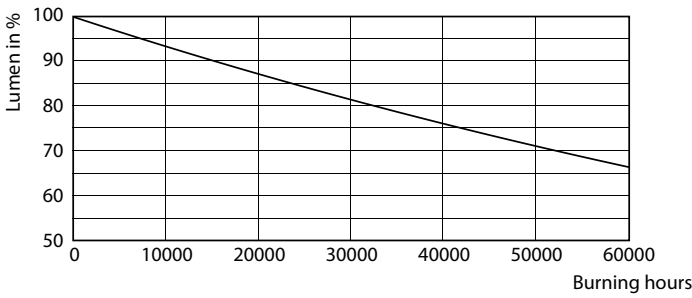

Lumen Maintenance Diagram

Lifetime



LifetimeVsTc

