

Rear Flange Recessed Contact

11199



600V 3000W 5KV pulse rated

Front Flange Recessed Contact

11348



600V 3000W 5KV pulse rated

**Low Voltage Bayonet BA15s
single contact**

12785



600V

6" leads


Wedge Base



125V-75W

23639

MR16 Bi-pin

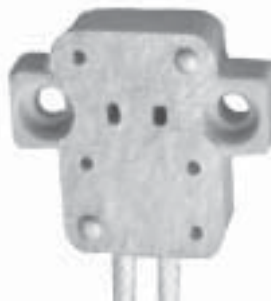


13381

**250V
75W**

SF-1 wire

MR16

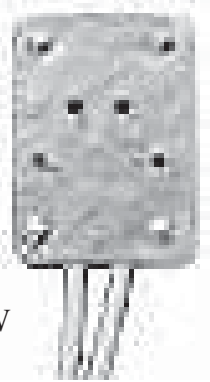

13828

250V 500W

**Low Voltage Halogen
G4, GX5.3, GY6.35**

23891



Rating: 4A 24V


G4 for Low Voltage Halogen

17634



Rating: 2A, 50V

Wires 18 AWG

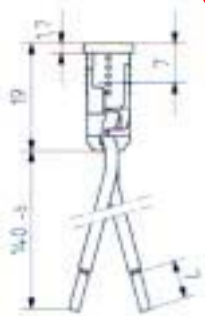

MR16 G5.3 & G6.35

14599



250V 75W

GU10 Base Lamps

16065



250V 250W

Bayonet Double Contact Lampholders

200 dg. 9" leads



**mounting
bracket**

22934

125V 500W

200 dg. 9" leads



27253

125V 500W

threaded 1/8 IP