



PAR30/PAR20 LED

23PAR30s/PER/930/F25/ND/120V 6/1FB

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information	
Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	23-75W
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	1900 lm
Luminous Flux (Rated) (Nom)	1900 lm
Luminous Intensity (Nom)	9000 cd
Color Designation	White (WH)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	82.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	23 W
Lamp Current (Nom)	206 mA
Wattage Equivalent	75 W


Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	94 °C
Controls and Dimming	
Dimmable	No
Approval and Application	
Suitable For Accent Lighting	Yes
Product Data	
Order product name	23PAR30s/PER/930/F25/ND/120V 6/1FB
EAN/UPC - Product	046677534691
Order code	534693
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001917504
Net Weight (Piece)	0.220 kg

PAR30/PAR20 LED

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.
- CAUTION: Risk of electric shock— do not use where directly exposed to water
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs,change the location of the products involved. This RFLD device complies with Canadian ICES-005.


Dimensional drawing




PAR30s 24.5-W 2000lm 25D 3000K E26 ND

Product	D	C
23PAR30s/PER/930/F25/ND/120V 6/1FB	96 mm	94 mm


Photometric data



LEDspot 23 PAR30L 930 F25

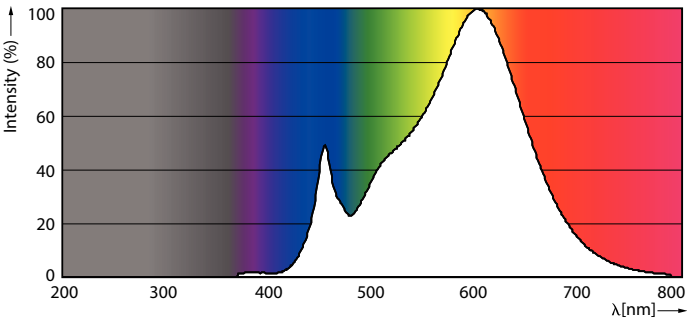


LEDspot PAR30 1FB

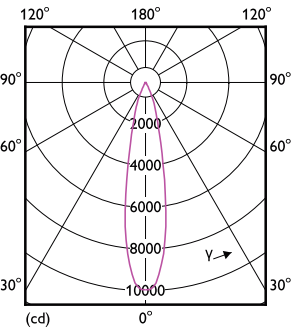


LEDspot 23 PAR30L 930 F25

PAR30/PAR20 LED

Lifetime

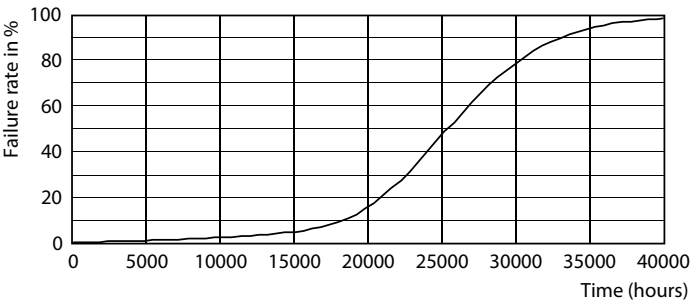

LEDspot PAR30 1FB

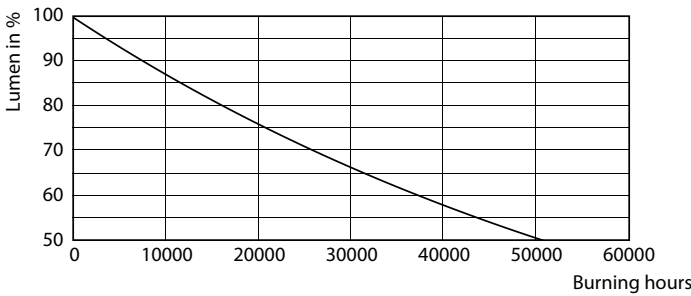

LEDspot PAR30 1FB

