



Day-Brite / CFI EvoGrid recessed utilizes highly reliable and efficient Philips LED platform boards and dimmable driver enabling market leading performance in its category. Its soft opal diffuser with large luminous area minimizes apparent brightness compared to other basket luminaires and provides general lighting perfect for a wide variety of applications.

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat.No: \_\_\_\_\_

Type: \_\_\_\_\_

Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

### Ordering guide

example: 2EVG38L840-4-D-UNV-DIM

Width	Family	Ceiling Type	Air Function	Lumens (nominal delivered)	Color	Length	Center Diffuser	Voltage	Driver	Options
2	EV	G			—	4	—	—	—	
2' 2"	EV EvoGrid	G Grid	blank Static H Air Return	<b>Standard efficacy</b> 30L 3000 38L 3800 43L 4300 48L 4800 54L 5400 74L 7400 85L 8500 90L 9000  <b>High efficacy</b> 38LH 3800 43LH 4300 48LH 4800 54LH 5400 74LH 7400  Other lumen packages may be ordered in increments of 100lm from 3000 to 9000 lumens	830 <sup>1</sup> 80 CRI, 3000K 835 80 CRI, 3500K 840 80 CRI, 4000K 850 <sup>1</sup> 80 CRI, 5000K	4' 4"	D Diffuse (opal) DS Diffuse smooth (opal) R Diffuse round ribbed (opal) RS Diffuse round smooth (opal)	UNV Universal Voltage, 120-277 volt 120 <sup>2</sup> 120V 277 <sup>2</sup> 277V 347 347V	DIM <sup>3</sup> Dimming Step dimming to 40% input power SDIM <sup>4</sup> MarkX phase dimming LDE Lutron LDE5, 5% dimming DALI DALI	F1 3/8" flex, 3 wire 18 gauge 6' F2 3/8" flex, 4 wire 18 gauge 6' F1/D 3/8" twin flex, 3 wire 18 gauge 6' for dimmable luminaires F2/5W 3/8" single flex, 5 wire 18 gauge 6' for dimmable luminaires F2/6W 3/8" single flex, 6 wire 18 gauge 6' for dimmable and emergency luminaires GLR Fusing, fast blow ER100 <sup>8,9</sup> UL924 listed sensor bypass relay, factory installed between driver & sensor GTD/E <sup>9</sup> UL924 listed Bodine GTD factory installed on driver input GTD/SNSR <sup>8,9</sup> UL924 listed Bodine GTD installed between driver & sensor EMLED Integral emergency battery pack, 1100lm nominal (ballast enclosure on top of luminaire) DSC Quick driver disconnect SWZCS <sup>5,6</sup> Interact Pro scalable sensor with integral daylight & occupancy sensing, advanced grouping with dwell time SWZDT <sup>5</sup> Integral sensor, daylighting and occupancy, advanced grouping with dwell time RADIO <sup>5</sup> Interact Pro RF sensor, enables wireless connected lighting control IAOSB <sup>5,6</sup> Interact Office advanced wireless sensor bundle, integral SC1500 w/IoT capabilities for enterprise scale projects CHIC Chicago Plenum rated CRM <sup>7</sup> Continuous row mount TAP Top access plate AG Antimicrobial finish BAC <sup>10</sup> Meets the requirements of the Buy American Act of 1933 (BAA)

- 3000K and 5000K color temperatures available only on high efficacy configurations
- XDIM requires 120V or 277V specification.
- Integral controls options dimmable to 5% via wireless all switch. Non-controls are 0-10v dimmable to 1%.
- Consult factory for SDIM on 74L and 74LH packages.
- Specify only with -DIM driver option
- Must order IRT9015 Interact commissioning remote with each system order.
- CRM includes side cover with top access plate and additional end cover. 7/8" gap between fixtures.
- Must be installed in conjunction with a UL1008 device.
- Must be ordered with an integral controls option.
- Failure to properly select the "BAC" suffix could result in you receiving product that is not BAA compliant product with no recourse for an RMA or refund. This BAC designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies.
- Consult Signify to confirm whether specific accessories are BAA-compliant.

### Accessories<sup>11</sup> (order separately)

- FMA24 - 2'x4' "F" mounting frame for NEMA "F" mounting
- EVD4L - EvoGrid 2'x4' rectangular ribbed replacement lens
- EVDS4L - EvoGrid 2'x4' rectangular smooth replacement lens
- EVR4L - EvoGrid 2'x4' round ribbed replacement lens
- EVRS4L - EvoGrid 2'x4' round smooth replacement lens
- FSK24 - 2'x4' surface mount field installation kit (factory welded seams), order with -TAP (top access plate) option (EMLED option not available)
- FSF24 - 2'x4' surface mount field assembly kit, order with -TAP (top access plate) option (EMLED option not available)

### SWZCS accessories<sup>11</sup> (order separately)

- IRT9015 - handheld remote for grouping and configuration(at least one remote required for any SWZCS installation).
- UID8451/10 - Wireless Dimmer Switch Selector
- UID8461/10 - Wireless Scene Selector

### General Notes

- All options factory installed.
- All accessories are field installed.
- Many luminaire components, such as reflectors, refractors, lenses, sockets, lamp holders, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, petroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility.

# 2EVG EvoGrid recessed 2x4

up to 9000 lumens

## Ordering guide – PoE controls (Static & Tunable White)

example: 2EVG43L8TW-4-D-LV-POE-IAO

Width	Family	Ceiling Type	Air Function	Lumens (nominal delivered)	Color	Length	Center Diffuser	Voltage	Driver	Options
<b>2</b>	<b>EV</b>	<b>G</b>			—	<b>4</b> —	—	<b>LV</b> —	<b>POE</b> —	
2 2'	EV EvoGrid	G Grid	Blank Static H Air return	38L 3800 43L 4300 48L 4800	Static White 830 80 CRI, 3000K 835 80 CRI, 3500K 840 80 CRI, 4000K 850 80 CRI, 5000K  Color Tuning 8TW 80CRI, 2700K thru 6500K tunable white	4 4'	D Diffuse (opal) DS Diffuse smooth (opal) R Diffuse round ribbed (opal) RS Diffuse round smooth (opal)	LV Low voltage	POE Power over ethernet	AG Antimicrobial finish EMPOE <sup>1</sup> 600lm integral emergency driver and battery pack IAO Integral Interact Office daylighting and occupancy sensor, enables wireless connected lighting control IAOSB Interact Office advanced wired sensor bundle, integral SC2000 w/ IoT capabilities for enterprise scale projects

1 Indicator light and test switch located on housing side panel..

## Ordering guide – DALI Controls (Tunable White)

example: 2EVG43L8TW-4-D-UNV-DTW-IAO

Width	Family	Ceiling Type	Air Function	Lumens (nominal delivered)	Color	Length	Center Diffuser	Voltage	Driver	Options
<b>2</b>	<b>EV</b>	<b>G</b>			—	<b>4</b> —	—	<b>UNV</b> —	<b>DTW</b> —	
2 2'	EV EvoGrid	G Grid	Blank Static H Air return	39L 3900 43L 4300 49L 4900 56L 5600 65L 6500	8TW 80CRI, 2700K thru 6500K tunable white	4 4'	D Diffuse (opal) DS Diffuse smooth (opal) R Diffuse round ribbed (opal) RS Diffuse round smooth (opal)	UNV Universal Voltage, 120-277 volt	DTW Dual channel tunable white	AG Antimicrobial finish F1/D 3/8" twin flex, 3 wire 18 gauge 6' for dimmable luminaires F2/7W 3/8" single flex, 7 wire 18 gauge 6' for emergency Factory wired Bodine BSL310 integral emergency pack. Nominal 1100lm IAO Integral Interact Office daylighting and occupancy sensor, enables wireless connected lighting control IAOSB Interact Office advanced wired sensor bundle, integral SC2000 w/ IoT capabilities for enterprise scale projects GLR Fusing, fast blow DSC Quick driver disconnect

# 2EVG EvoGrid recessed 2x4

up to 9000 lumens

## Application

- A highly efficient, visually comfortable, architecturally styled recessed LED luminaire designed with a minimalistic strategy to achieve sustainable objectives.
- Low profile configuration is only 2-3/4" deep, requiring minimal plenum space.
- Soft opal diffuser with large luminous area minimizes apparent brightness and provides high visual comfort perfect for a wide variety of general lighting applications like offices, schools, retail, or healthcare.
- Multiple lumen packages over a wide range to provide significant application flexibility over light levels and/or luminaire spacing.
- Directs a controlled amount of light to the higher angles in the room to balance the brightness of the surfaces and eliminate "cave effect" while creating the impression of a larger, brighter space without glare.
- Excellent color rendering with a CRI of 80.
- LEDs are an excellent source for use with controls since dimming or frequent switching does not degrade the performance or life of the source. Integral or external sensors are available for use.
- Designed for use with standard Grid (NEMA "G") or Narrow Grid (NEMA "NFG") ceiling T-bars. Drywall or plaster requirements can be accommodated by using an FMA24 "F" mounting frame (sold separately).
- Continuous row mount option (CRM) includes wireway covers on each end and on one side of housing.

## Construction/Finish

- Uncomplicated design is 2-3/4" in depth and only requires a few parts outside of the electrical system and hardware, creating several benefits:
  - Less material required
  - Less packaging required
  - Reduced weight
  - Less energy required for construction and assembly
  - More luminaires can be shipped per truck to reduce fuel use and emissions

- Luminaire finish is matte white polyester for a high quality, durable finish.
- T-bar grid clips are integral to body.
- Access plate located on end provides easy field wiring. TAP option provides top mounted access plate.

## Electrical

- Integral sensor options for occupancy sensing and/or daylight harvesting are available for additional energy savings with no reduction of life or increase in installation labor.
- Total luminaire efficacy exceeding 139 LPW (lumens per Watt) with high efficiency packages.
- LED board is easily accessible from below without tools. Single LED board is replaceable if needed via plug-in connectors to ensure long service life.
- LED driver is accessible from above.
- Emergency driver is accessible from above. To estimate lumen output in emergency mode, multiply emergency pack wattage by efficacy, then by 1.10. Typical lumen output is 1300lm for EMLED.
- The GTD/E option is used to bypass wall switches and allow luminaire operation on auxiliary power. Generator transfer requires installation in conjunction with a UL1008 listed device.
- The GTD/SNSR option is used to bypass integrated sensor control in the event of utility power loss. Generator transfer requires installation in conjunction with a UL1008 listed device.
- Step dim 100/40% and additional dimming options available.
- 5 year manufacturer's limited warranty. Visit [signify.com/warranties](http://signify.com/warranties) for complete warranty information.
- TM-21 predicted L70 lumen maintenance up to 80,000 hours for high efficacy and 50,000 hours for standard efficacy configurations.
- cETLus listed to UL and CSA standards, suitable for damp locations.


## Enclosure

- Opal diffuser provides soft, comfortable lighting while maintaining high efficiency.
- Diffuser requires no frames or fasteners and can be easily removed from below without tools if needed.

## Energy data

Luminaire	Catalog Number	Input Power	Efficacy
2x4	2EVG38L840-4-D	37	110
	2EVG43L840-4-D	41	108
	2EVG48L840-4-D	48	105
	2EVG54L840-4-D	55	103
	2EVG74L840-4-D	83	93
	2EVG38L840-4-R	31	124
	2EVG43L840-4-R	35	124
	2EVG48L840-4-R	40	122
2x4 High Efficacy	2EVG54L840-4-R	46	120
	2EVG74L840-4-R	67	111
	2EVG38LH840-4-D	27	139
	2EVG43LH840-4-D	32	139
	2EVG48LH840-4-D	36	138
	2EVG54LH840-4-D	39	137
	2EVG74LH840-4-D	56	134
	2EVG38LH840-4-R	26	142
	2EVG43LH840-4-R	30	142
	2EVG48LH840-4-R	34	143
	2EVG54LH840-4-R	39	143
	2EVG74LH840-4-R	53	140

## Dimensions

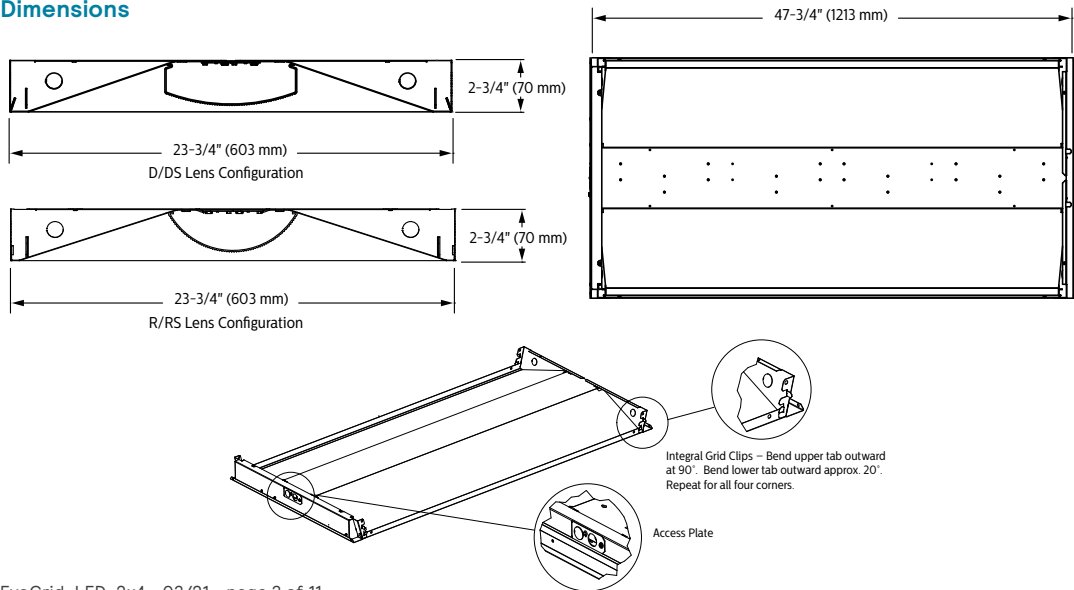

# 2EVG EvoGrid recessed 2x4

up to 9000 lumens

## Wireless Controls Options

### SpaceWise DT (SWZDT)

- Standalone daylight and occupancy sensing with advanced grouping, wireless mesh networking and dwell time.
- Commissioning via compatible Android phone and Philips Field App
- Dimming via compatible Zigbee wireless wall switch only (see link below for details)
- Register for the commissioning app at <http://registration.componentcloud.philips.com/appregistration/>
- Integral sensing options may not be combined
- For more information including recommended switches, refer to the following: –

**SWZDT** – [www.usa.lighting.philips.com/systems/lighting-systems/spacewise](http://www.usa.lighting.philips.com/systems/lighting-systems/spacewise)

### Emergency Options (ER100)

- Power Sensing (Factory default) – Recommended UL924 option requires unswitched power sense line, absence of voltage on the normal circuit triggers luminaire to 100% output
- Power Interruption Detection (Field option) – Detects AC power interruption >30ms triggers 90 minute emergency mode with luminaire at 100% output

### Interact Pro scalable sensor for Foundation, Advanced & Enterprise tiers (SWZCS and an evolution of SpaceWise)

- SWZCS is a connected sensor with integral occupancy and daylight sensing and supports wireless mesh connectivity.
- The sensor works in the Foundation mode (similar to SpaceWise) when configured without a gateway or in an Interact Pro Advanced or Enterprise mode if a compatible gateway is used.
- Interact Pro includes an App, a portal and a broad portfolio of wireless luminaires, lamps and retrofit kits all working on the same system.
- Startup is implemented via Interact Pro App (Android or iPhone) & Bluetooth connectivity. The App provides flexibility to choose between a gateway or non gateway mode for setup.
- Setup with the gateway requires wired internet access to the gateway. It is possible to add a gateway at a later point.
- Prepare project configuration steps remotely and use IRT9015 remote onsite to identify and group devices together.
- Compatible with:
  - UID8451/10 wireless dimmer switch
  - SWS200 wireless scene switch
  - Battery powered IP42 presence sensor OCC sensor IA CM WH 10/1
  - Battery powered IP42 presence & daylight sensor OCC-DL sensor IA CM IP42 WH
  - Battery powered IP65 presence sensor OCC sensor IA CM IP65 WH
  - Battery powered IP65 presence & daylight sensor OCC-DL sensor IA CM IP65 WH
- For more information on Interact Pro visit: [www.interact-lighting.com/interactproscalablesystem](http://www.interact-lighting.com/interactproscalablesystem)

### Radio only sensor (RADIO)

- Integral RADIO only sensor simply enables wireless mesh connectivity to the luminaire without any occupancy or daylight sensing.
- Ideal for applications where sensing functionality is managed by other Interact devices and the luminaire only needs to have wireless connectivity.

### Interact Pro scalable sensor bundles for Enterprise tier

- IAOSB option in addition to occupancy and daylight sensing supports advanced IoT capabilities such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- Compatible with UID8451/10 wireless dimmer switch, SWS200 wireless scene switch, wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) and wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1) and wireless Occupancy or Daylight & Occupancy sensors available.
- Use Interact software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- Requires compatible Gateway and internet connectivity for commissioning.
- For more information, visit: [www.interact-lighting.com/office](http://www.interact-lighting.com/office) or [www.usa.lighting.philips.com/systems/system-areas/offices](http://www.usa.lighting.philips.com/systems/system-areas/offices)

## Wired Controls Options

### Interact Office Wired (PoE), Static White & Tunable White

- PoE based IoT connected lighting solution for large enterprises that span across multiple floors, buildings and require multiple gateways.
- Use Interact Office software and insights to increase building efficiency, achieve building wide integration and optimize space through occupancy analytics.
- Human centric lighting through tunable white technology – Dynamic behaviors via scheduled lighting recipes mimicking daylight patterns or supporting biorhythms.
- IAOSB option in addition to occupancy and daylight sensing supports advanced IoT capabilities such as people estimation analysis, desk level temperature & humidity sensing, noise classification, and BLE beacon.
- PoE lighting controller is accessible from below.

- Integral sensor option for occupancy sensing (PIR) and/or daylight harvesting available for additional energy savings.
- Optional integral emergency controller and battery pack provides 600lm nominal output. Test switch and indicator light mounted on side of chassis on one end.
- Emergency battery has a 3 month pre-installed shelf life, and must be stored and installed in environments of 20C to 30C (-4F to 86F) ambient, and 45-85% relative humidity.
- For more information on Interact Office Wired, visit: [www.interact-lighting.com/office](http://www.interact-lighting.com/office) or [www.usa.lighting.philips.com/systems/system-areas/offices](http://www.usa.lighting.philips.com/systems/system-areas/offices)

### Tunable White with DALI

- Signify tunable white solutions are designed to help maximize the influence of lighting on your daily life.
- Dynamic behaviors via scheduled lighting recipes mimicking daylight patterns or supporting biorhythms.
- Scene setting via lighting pre-sets based on various combinations of lighting color temperature and intensity.

[www.usa.lighting.philips.com/products/product-highlights/tunable-white-technology](http://www.usa.lighting.philips.com/products/product-highlights/tunable-white-technology)

# 2EVG EvoGrid recessed 2x4


up to 9000 lumens

Interact Pro scalable system			
	Foundation	Advanced	Enterprise
Dimming, grouping, and zoning	✓	✓	✓
Bluetooth and ZigBee enabled	✓	✓	✓
Motion sensing and daylight harvesting	✓	✓	✓
Integration with 0-10V and phase dimming fixtures	✓	✓	✓
Code compliance	✓	✓	✓
Granular dimming and dwell time	✓	✓	✓
Energy reporting and monitoring		✓	✓
Scheduling		✓	✓
Demand response		✓	✓
BMS integration (BACnet)			✓
Floor plan visualization			✓
IoT sensors for wellness			✓
IoT Apps for productivity			✓

## Currently supported maximum system size

To be able to design the lighting system correctly for the customer, it is important to know the prime characteristics of the system, its possibilities and limitations.


System level	
Total number of gateways	Unlimited
Total number of devices	200 per network
• luminaires with integrated sensors	150
• smart TLEDs	150
Total number of ZGP devices (sensors and switches)	50
• sensors	30
• switches	50
• zones and groups	64
Group level	
Recommended number of lights	40 (recommended 25)
Number of ZGP devices	5
Number of scenes	16

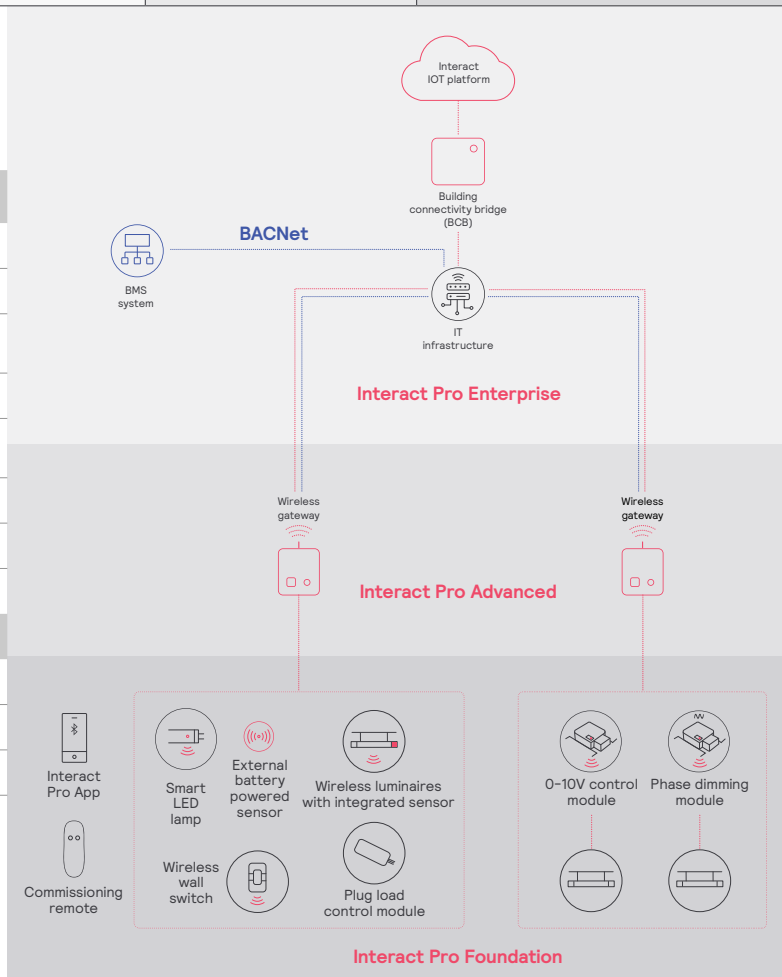

# 2EVG    EvoGrid recessed 2x4

up to 9000 lumens

Air return data

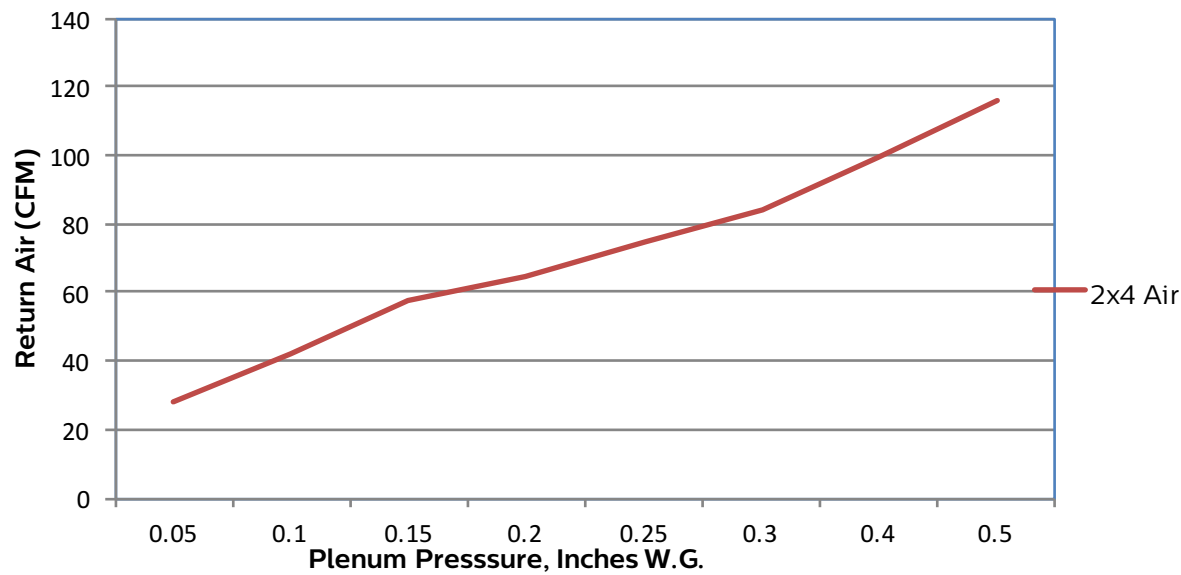

Pressure	0.05	0.1	0.15	0.2	0.25	0.3	0.4	0.5
CFM	28	42	58	65	75	84	100	116
Noise	<15	24	34	37	41	45	47	49



# 2EVG EvoGrid recessed 2x4

up to 9000 lumens

## Photometry

2x4 EvoGrid recessed LED, high efficacy, 4800 nominal delivered lumens

LER – 138

<b>Catalog No.</b>	2EVG48LH840-4-D-UNV-DIM
<b>Test No.</b>	34935
<b>S/MH</b>	1.2
<b>Lamp Type</b>	LED
<b>Lumens</b>	4897
<b>Input Watts</b>	36

Comparative yearly lighting energy cost per 1000 lumens – **\$1.74** based on 3000 hrs. and \$.08 pwr KWH.

The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

Photometric values based on test performed in compliance with LM-79.

### Candlepower

Angle	End	45	Cross	Back-45
<b>0</b>	1778	1778	1778	1778
<b>5</b>	1749	1771	1782	1771
<b>15</b>	1669	1701	1714	1701
<b>25</b>	1509	1545	1566	1545
<b>35</b>	1283	1333	1364	1333
<b>45</b>	1022	1087	1134	1087
<b>55</b>	751	838	913	838
<b>65</b>	494	613	704	613
<b>75</b>	264	393	465	393
<b>85</b>	74	114	119	114

### Light Distribution

Degrees	Lumens	% Luminaire
<b>0-30</b>	1358	27.7
<b>0-40</b>	2189	44.7
<b>0-60</b>	3775	77.1
<b>0-90</b>	4899	100.0
<b>0-180</b>	4899	100.0

### Average Luminance

Zone	End	45°	Cross
<b>45</b>	7532	8012	8362
<b>55</b>	6828	7614	8295
<b>65</b>	6090	7566	8686
<b>75</b>	5319	7922	9360
<b>85</b>	4450	6795	7112

### Coefficients of Utilization

EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)									
pcc	80			70			50		
pw	70	50	30	70	50	30	50	30	
RCR									
0	118	118	118	115	115	115	111	111	
1	108	103	98	106	101	96	96	93	
2	97	90	82	95	88	81	83	79	
3	90	79	69	86	77	68	73	68	
4	81	69	60	80	68	59	66	58	
5	75	61	53	72	60	53	58	52	
6	69	56	46	68	55	46	53	46	
7	65	51	41	63	50	41	48	40	
8	59	46	38	58	46	38	45	36	
9	56	42	34	55	41	34	40	34	
10	53	40	32	52	39	30	38	30	

2x4 EvoGrid recessed LED, 4800 nominal delivered lumens

LER – 105

<b>Catalog No.</b>	2EVG48L840-4-D-UNV-DIM
<b>Test No.</b>	34090
<b>S/MH</b>	1.2
<b>Lamp Type</b>	LED
<b>Lumens</b>	5015
<b>Input Watts</b>	48

Comparative yearly lighting energy cost per 1000 lumens – **\$1.29** based on 3000 hrs. and \$.08 pwr KWH.

The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.

Photometric values based on test performed in compliance with LM-79.

### Candlepower

Angle	End	45	Cross	Back-45
<b>0</b>	1830	1830	1830	1777
<b>5</b>	1813	1820	1825	1770
<b>15</b>	1725	1739	1746	1700
<b>25</b>	1554	1571	1582	1541
<b>35</b>	1317	1347	1365	1330
<b>45</b>	1048	1096	1132	1086
<b>55</b>	771	851	930	838
<b>65</b>	510	642	733	614
<b>75</b>	279	417	485	394
<b>85</b>	81	123	132	111

### Light Distribution

Degrees	Lumens	% Luminaire
<b>0-30</b>	1387	27.6
<b>0-40</b>	2228	44.4
<b>0-60</b>	3836	76.4
<b>0-90</b>	5019	100.0
<b>0-180</b>	5020	100.0

### Average Luminance

Zone	End	45°	Cross
<b>45</b>	7725	8080	8349
<b>55</b>	7009	7732	8457
<b>65</b>	6290	7919	9045
<b>75</b>	5613	8389	9769
<b>85</b>	4870	7342	7903

### Coefficients of Utilization

EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)									
pcc	80			70			50		
pw	70	50	30	70	50	30	50	30	
RCR									
0	118	118	118	115	115	115	111	111	
1	108	103	98	105	101	96	96	93	
2	97	90	82	94	88	81	83	79	
3	89	79	69	86	77	68	73	67	
4	81	69	60	79	68	59	66	57	
5	75	61	53	72	60	52	58	51	
6	69	56	46	68	55	46	53	46	
7	65	51	41	63	50	41	47	40	
8	59	46	38	58	46	38	44	36	
9	56	42	34	55	41	34	40	34	
10	53	39	32	51	39	30	38	30	

# 2EVG EvoGrid recessed 2x4

up to 9000 lumens

2x4 EvoGrid recessed LED, high efficacy, 4800 nominal delivered lumens

LER – 144

<b>Catalog No.</b>	2EVG48LH840-4-R-UNV-DIM	<b>Candlepower</b>					<b>Light Distribution</b>			<b>Average Luminance</b>			
<b>Test No.</b>	38774	<b>Angle</b>	<b>End</b>	<b>45</b>	<b>Cross</b>	<b>Back-45</b>	<b>Degrees</b>	<b>Lumens</b>	<b>% Luminaire</b>	<b>Zone</b>	<b>End</b>	<b>45°</b>	<b>Cross</b>
<b>S/MH</b>	1.3	0	1666	1666	1666	1666	0-30	1286	26.1	45	7359	8120	8741
<b>Lamp Type</b>	LED	5	1634	1661	1671	1661	0-40	2100	42.6	55	6833	8050	9071
<b>Lumens</b>	4927	15	1560	1599	1619	1599	0-60	3736	75.8	65	5772	8313	9621
<b>Input Watts</b>	34	25	1420	1475	1513	1475	0-90	4932	100.0	75	4800	8216	10115
		35	1227	1304	1363	1304	0-180	4932	100.0	85	3218	7919	7650
		45	998	1101	1186	1101							
		55	752	886	998	886							
		65	468	674	780	674							
		75	238	408	502	408							
		85	54	132	128	132							

2x4 EvoGrid recessed LED, 4800 nominal delivered lumens

LER – 122

<b>Catalog No.</b>	2EVG48L840-4-R-UNV-DIM	<b>Candlepower</b>					<b>Light Distribution</b>			<b>Average Luminance</b>			
<b>Test No.</b>	38786	<b>Angle</b>	<b>End</b>	<b>45</b>	<b>Cross</b>	<b>Back-45</b>	<b>Degrees</b>	<b>Lumens</b>	<b>% Luminaire</b>	<b>Zone</b>	<b>End</b>	<b>45°</b>	<b>Cross</b>
<b>S/MH</b>	1.3	<b>0</b>	1658	1658	1658	1658	<b>0-30</b>	1280	26.1	<b>45</b>	7307	8088	8690
<b>Lamp Type</b>	LED	<b>5</b>	1623	1653	1664	1653	<b>0-40</b>	2090	42.6	<b>55</b>	6785	8019	9012
<b>Lumens</b>	4903	<b>15</b>	1550	1591	1612	1591	<b>0-60</b>	3719	75.8	<b>65</b>	5735	8297	9556
<b>Input Watts</b>	40	<b>25</b>	1411	1468	1506	1468	<b>0-90</b>	4902	100.0	<b>75</b>	4761	8153	9672
		<b>35</b>	1219	1299	1357	1299	<b>0-180</b>	4903	100.0	<b>85</b>	3206	7578	7524
		<b>45</b>	991	1097	1179	1097							
		<b>55</b>	747	882	992	882							
		<b>65</b>	465	673	775	673							
		<b>75</b>	236	405	480	405							
		<b>85</b>	54	127	126	127							
Comparative yearly lighting energy cost per 1000 lumens – <b>\$1.97</b> based on 3000 hrs. and \$0.08 pwr KWH.													
The photometric results were obtained in the Philips Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.													
Photometric values based on test performed in compliance with LM-79.													


# 2EVG    EvoGrid recessed 2x4

up to 9000 lumens


Tunable White with PoE

Color Information


2x4 EvoGrid 3800lm	2700K	3000K	3500K	4000K	5000K	6500K
Flux	3833	3836	3840	3843	3848	3854
Power	27	27	27	27	26	26
Efficacy	140	141	143	145	147	149
CCT	82	84	86	87	87	85
CRI	15	23	32	37	35	22
R9	18	23	31	34	31	11

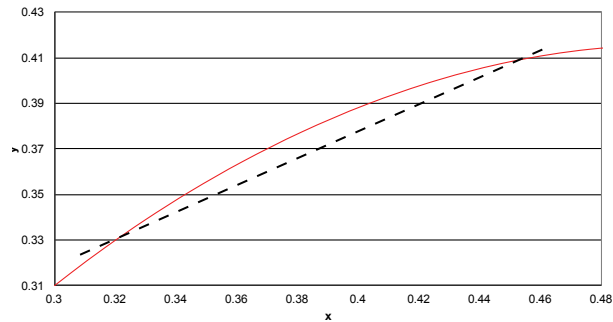

2x4 EvoGrid 4300lm	2700K	3000K	3500K	4000K	5000K	6500K
Flux	4327	4330	4334	4338	4343	4349
Power	33	31	31	30	30	30
Efficacy	132	138	141	143	147	147
CCT	82	84	86	87	87	85
CRI	14	23	32	36	35	23
R9	18	23	31	34	31	11

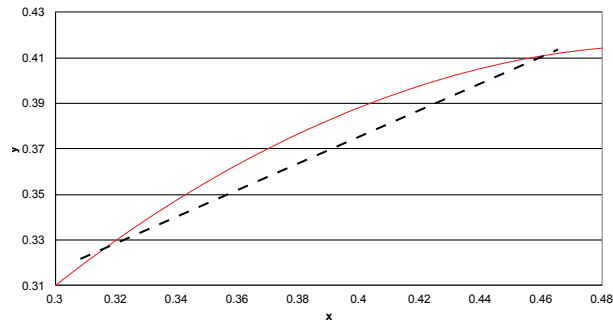

2x4 EvoGrid 4800lm	2700K	3000K	3500K	4000K	5000K	6500K
Flux	4815	4817	4819	4821	4824	4827
Power	39	36	35	34	33	34
Efficacy	125	134	138	141	146	144
CCT	82	84	86	87	87	85
CRI	14	22	31	36	35	23
R9	18	23	31	34	31	11

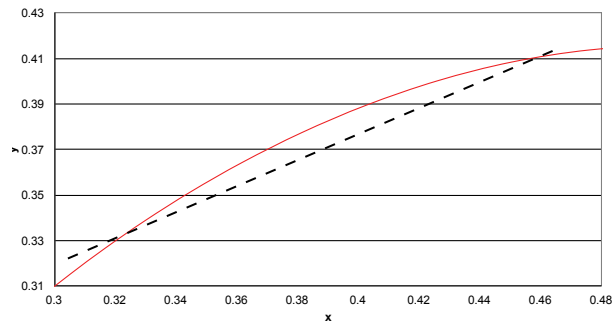

# 2EVG EvoGrid recessed 2x4

up to 9000 lumens

Tunable White with DALI

## Electrical Specifications

Input Voltage	120V				277V			
Nominal CCT	2700K				2700K			
Nominal Lumens	3900	4300	4900	5600	3900	4300	4900	5600
<b>Commissioned State</b>								
Power (W)	41.8	47.0	55.9	65.7	41.5	46.4	55.0	64.3
Current (A)	0.4	0.4	0.5	0.6	0.2	0.2	0.2	0.3
Power Factor	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9
THD (%)	14.0	13.0	11.0	10.0	17.0	16.5	16.0	14.5
Off State Power (W)	0.6	0.6	0.6	0.6	0.9	0.9	0.9	0.9
<b>Non-Commissioned State</b>								
Power (W)	78.0	87.0	102.0	116.0	77.0	86.0	101.0	113.0
Current (A)	0.7	0.7	0.9	1.0	0.3	0.3	0.4	0.4

## Photometry

2x4 EvoGrid recessed LED with tunable white, 4300 nominal delivered lumens, 2700K CCT

LER – 110

<b>Catalog No.</b>	2EVG43L8TW-4-D-UNV-DTW	<b>Candlepower</b>	<b>Angle</b>	<b>End</b>	<b>45</b>	<b>Cross</b>	<b>Light Distribution</b>	<b>Degrees</b>	<b>Lumens</b>	<b>% Luminaire</b>	<b>Average Luminance</b>	<b>Zone</b>	<b>End</b>	<b>45'</b>	<b>Cross</b>	
<b>Test No.</b>	36529		<b>0</b>	1602	1602	1602		<b>0-30</b>	1221	27.0		<b>45</b>	6988	7435	7754	
<b>S/MH</b>	1.2		<b>5</b>	1576	1594	1600		<b>0-40</b>	1977	43.7		<b>55</b>	6474	7266	7886	
<b>Lamp Type</b>	LED		<b>15</b>	1502	1525	1538		<b>0-60</b>	3465	76.5		<b>65</b>	5501	7420	8357	
<b>Lumens</b>	4527		<b>25</b>	1361	1392	1412		<b>0-90</b>	4526	100.0		<b>75</b>	4621	7358	8453	
<b>Input Watts</b>	39		<b>35</b>	1168	1209	1238		<b>0-180</b>	4527	100.0		<b>85</b>	3074	6753	7255	
<b>CCT</b>	2700K		<b>45</b>	948	1009	1052										
			<b>55</b>	712	800	868										
			<b>65</b>	446	602	678										
			<b>75</b>	229	365	420										
		<b>85</b>	51	113	121											
Comparative yearly lighting energy cost per 1000 lumens – <b>\$2.18</b> based on 3000 hrs. and \$.08 pwr KWH.																
The photometric results were obtained in the Philips Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology.																
Photometric values based on test performed in compliance with LM-79.																
		<b>Coefficients of Utilization</b>														
		<b>EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)</b>														
		pcc	80			70			50							
		pw	70	50	30	70	50	30	50	30						
		RCR														
		0	118	118	118	115	115	115	111	111						
		1	108	103	98	105	101	96	96	93						
		2	97	90	81	94	88	81	83	79						
		3	89	78	69	86	77	68	73	67						
		4	81	68	59	79	68	59	66	57						
		5	75	61	53	72	60	52	58	51						
		6	68	56	46	67	55	46	53	45						
		7	64	51	41	63	50	40	47	40						
		8	59	46	38	57	45	36	44	36						
		9	56	41	34	55	41	34	40	33						
		10	52	39	30	51	39	30	38	30						


# 2EVG EvoGrid recessed 2x4

up to 7400 lumens


Tunable White with DALI

Color information


2x4 EvoGrid 3900lm	2700K	3000K	3500K	4000K	5000K	6500K
Flux	3790	3798	3805	3885	3811	3919
Power	41.4	42.9	40.7	40.2	38.2	35.4
Efficacy	91.5	88.6	93.5	96.8	99.8	110.7
CCT	2716	2915	3431	3990	5000	6606
CRI	83	84	87	87	87	84
R9	18	23	33	37	32	16
x	0.4568	0.4387	0.4037	0.3774	0.3446	0.3110
y	0.4071	0.3974	0.3784	0.3641	0.3462	0.3278
Duv	-0.0010	-0.0029	-0.0051	-0.0051	-0.0026	0.0034

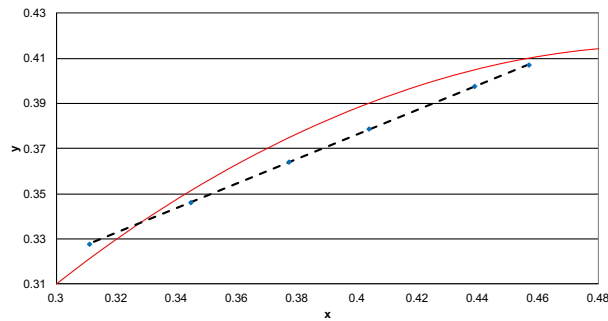


2x4 EvoGrid 4300lm	2700K	3000K	3500K	4000K	5000K	6500K
Flux	4247	4257	4259	4346	4254	4349
Power	46.5	47.8	45.2	44.4	42.2	39.4
Efficacy	91.2	89.0	94.3	97.9	100.8	110.3
CCT	2717	2916	3427	3980	4984	6610
CRI	83	84	86	87	87	84
R9	18	23	33	37	34	16
x	0.4567	0.4386	0.4039	0.3777	0.3450	0.3110
y	0.4070	0.3973	0.3784	0.3642	0.3462	0.3275
Duv	-0.0011	-0.0029	-0.0052	-0.0052	-0.0027	0.0033

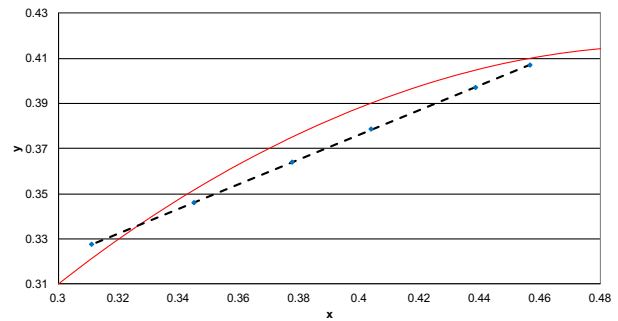

2x4 EvoGrid 4900lm	2700K	3000K	3500K	4000K	5000K	6500K
Flux	4969	5017	4983	5079	4955	5030
Power	55.0	56.2	52.4	51.3	48.7	45.8
Efficacy	90.3	89.3	95.1	99.1	101.9	109.8
CCT	2719	2932	3424	3972	4971	6625
CRI	83	84	86	87	87	84
R9	18	23	32	37	34	16
x	0.4564	0.4372	0.4040	0.3780	0.3454	0.3108
y	0.4068	0.3965	0.3784	0.3641	0.3461	0.3271
Duv	-0.0011	-0.0031	-0.0052	-0.0053	-0.0029	0.0032

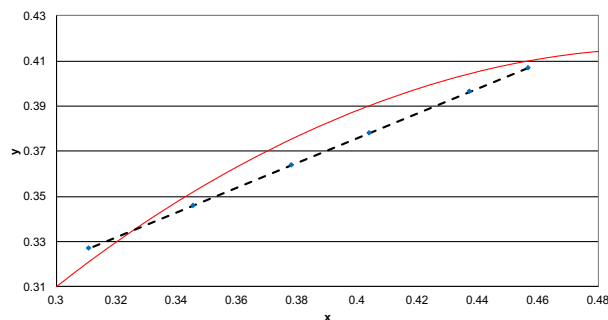

2x4 EvoGrid 5600lm	2700K	3000K	3500K	4000K	5000K	6500K
Flux	5805	5877	5833	5936	5780	5813
Power	65.6	66.2	61.2	59.7	56.2	53.7
Efficacy	88.5	88.8	95.4	99.5	102.9	108.3
CCT	2722	2934	3423	3965	4962	6654
CRI	83	84	86	87	87	84
R9	17	23	32	36	34	16
x	0.4561	0.4370	0.4039	0.3781	0.3456	0.3104
y	0.4066	0.3962	0.3781	0.3639	0.3459	0.3264
Duv	-0.0012	-0.0032	-0.0053	-0.0055	-0.0031	0.0030

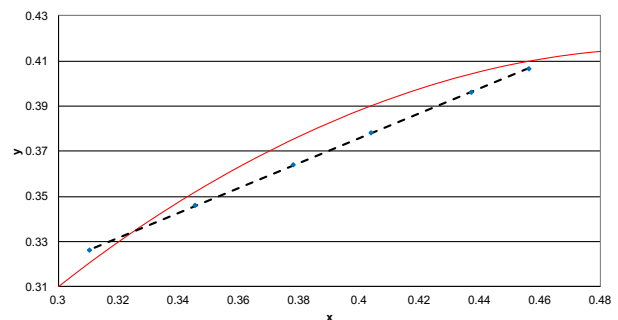

© 2021 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation  
200 Franklin Square Drive,  
Somerset, NJ 08873  
Telephone 855-486-2216

Signify Canada Ltd.  
281 Hillmount Road,  
Markham, ON, Canada L6C 2S3  
Telephone 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.