



# LED BA11

## 3.3BA11/PER/927-922/CL/G/E12/WGX 1FB T20

Philips LED BA11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.

### Product data


General Information	
Base	E12 [ Candelabra Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Technical Type	3.3-40W
Light Technical	
Color Code	927-922 [ CCT of 2700K-2200K]
Initial lumen (Nom)	300 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	- K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	3.3 W
Lamp Current (Nom)	35 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s

Power Factor (Nom)	0.75
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	50 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	3.3BA11/PER/927-922/CL/G/E12/WGX 1FB T20
EAN/UPC - Product	046677549541
Order code	549543
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001969204

# LED BA11

Net Weight (Piece) 0.018 kg


## Dimensional drawing




Candle BA11 4.5-40W 300lm 2200-2700K

Product	D	C
3.3BA11/PER/927-922/CL/G/E12/WGX 1FB T20	35 mm	110 mm


## Photometric data



LEDbulb E12 E26 BA11 B11 927 CL-LDD

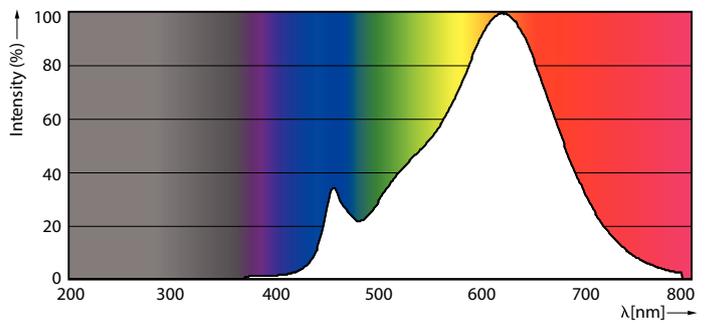

LEDbulb 927 CL-POC





General Parameters (1) Page Lighting (1) Page 11

LEDbulb 3.3W E12 BA11 927 CL

# LED BA11

## Lifetime

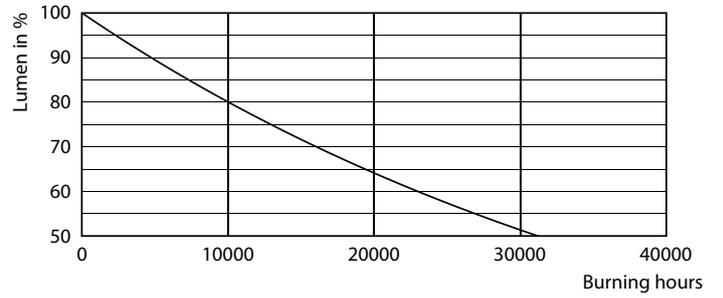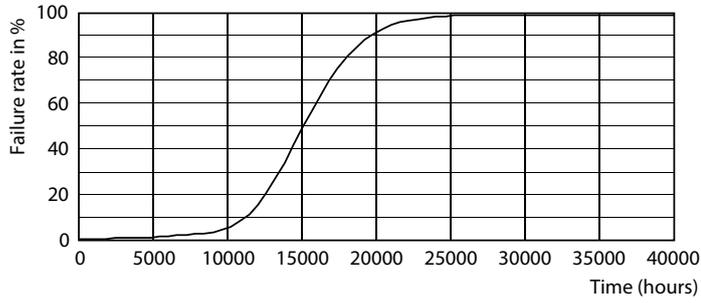

15K LED

15K LMP

