



Create a vintage look while saving money with LED technology

Classic filament LED bulbs

Philips LED vintage-style lamps allow you to maintain a warm, classic light effect while providing longer life and energy savings.

Benefits

- Greater than 80% energy savings when compared to conventional equivalents
- 5 times the lifetime when compared to conventional equivalents (15,000 hrs)
- Light distribution and color which replicates the effect of standard, vintage-style incandescent lamps
- Provides a warm, cozy light effect even at maximum brightness
- Some products feature an amber finish to increase the decorative effect when in use and also when turned off

Features






- A variety of aesthetically pleasing, classic lamp shapes
- Integrates a compact driver design to achieve the decorative look and feel
- Instant on
- Certain models feature smooth (and deeper) dimming
- Select models are UL wet rated for outdoor use

Application

- Use inside with clear pendants, table or floor lamps for a classic interior design
- UL wet rated models can be used outside on string lights over a patio or pergola, in a marquee, or install them in outdoor fixtures with a medium base

Classic filament LEDbulbs

Versions


	E26 A15 Clear		E26 A19 Amber
	E26 ST19 Amber		Single Contact Medium Screw G25 (G25) Clear
	Single Contact Medium Screw A19 (A19) Clear		Single Contact Medium Screw G 63 inch
	Single Contact Medium Screw A 50 inch		Single Contact Medium Screw T 65mm

Classic filament LEDbulbs

Versions



Single Contact Medium Screw G 63
inch





Single Contact Medium Screw A
50 inch



Single Contact Medium Screw T
65mm

Dimensional drawing







Product	D	C
7.5A50/VIN/820/CL/G/DIM 2/1CT	160 mm	292 mm
7.5A50/VIN/820/CL/G/DIM 1FFP	160 mm	292 mm
7.5A50/VIN/820/CL/G/D+CORD VIN	160 mm	292 mm

Product	D	C
7.5A50/modern/840/CL/G/DIM 2/1CT	160 mm	292 mm
7.5A50/modern/840/CL/G/DIM 1FFP	160 mm	292 mm

Classic filament LEDbulbs

Dimensional drawing



Product	D	C
7.5T20/modern/840/CL/G/DIM 1FFP	65 mm	272 mm
7.5T20/VIN/820/CL/G/DIM 2/1CT	65 mm	272 mm
7.5T20/VIN/820/CL/G/DIM 1FFP	65 mm	272 mm
7.5T20/modern/840/CL/G/DIM 2/1CT	65 mm	272 mm


Product	D	C
7.5G63/modern/840/CL/G/DIM 2/1CT	200 mm	285 mm
7.5G63/modern/840/CL/G/DIM 1FFP	200 mm	285 mm
7.5G63/VIN/820/CL/G/DIM 2/1CT	200 mm	285 mm
7.5G63/modern/840/CL/G/D+CORD black	200 mm	285 mm
7.5G63/VIN/820/CL/G/DIM 1FFP	200 mm	285 mm

Product	D	C
8A19/PER/822-827/E26/CL/G/WGX 10/1CT	61 mm	104 mm


Product	D	C
4G25/PER/822-827/E26/CL/G/WGX 10/1CT	81 mm	121 mm
5.5G25/PER/822-827/E26/CL/G/WGX 10/1CT	81 mm	121 mm
3.5G25/PER/822-827/E26/CL/G/WGX 10/1CT	81 mm	121 mm
5G25/PER/822-27/E26/CL/GL/WGD 4/2BC	80 mm	121 mm

Classic filament LEDbulbs


Dimensional drawing




Product	D	C
5A19/PER/822-827/E26/CL/G/WGX 10/1CT	61 mm	104 mm



Product	D	C
6A19/PER/850/CL/G/DIM 4/2BC	60 mm	103 mm





Product	D	C
4.5BA11/LEDFilament/820/CL-A/DIM 120V	35 mm	115 mm



Product	D	C
2A15/LEDFilament/822/CL/ND 120V	47 mm	80 mm

Classic filament LEDbulbs

Dimensional drawing



Product	D	C
5.5ST19/LEDFilament/820/CL-A/DIM 120V	64 mm	137 mm

Product	D	C
4.5A19b/LEDFilament/820/CL-A/DIM 120V	60 mm	106 mm

Product details



LEDbulb 7,5 820



LEDbulb 7,5 840

Operating and Electrical	
Starting Time (Nom)	0.5 s
General Information	
Cap-Base	E26
Nominal Lifetime (Nom)	15000 h
Rated Lifetime (Hours)	15000 h
Switching Cycle	20000X
Light Technical	
Color Rendering Index (Nom)	80
Llmf At End Of Nominal Lifetime (Nom)	70 %

Classic filament LEDbulbs

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/ 1000 h
461111	2A15/LED/822/FCL/ND 120V 6/1	- kWh
461665	4.5A19b/LEDFilament/820/CL-A/DIM 120V	- kWh
461673	5.5ST19/LEDFilament/820/CL-A/DIM 120V	- kWh
469759	5G25/PER/822-27/E26/CL/GL/WGD 4/2BC	-
477612	6A19/PER/850/CL/G/DIM 4/2BC	-
536268	7.5G63/VIN/820/CL/G/DIM 2/1CT	-
538926	7.5G63/VIN/820/CL/G/DIM 1FFP	-
536276	7.5A50/VIN/820/CL/G/DIM 2/1CT	-
538934	7.5A50/VIN/820/CL/G/DIM 1FFP	-
539676	7.5A50/VIN/820/CL/G/D+CORD VIN	-

Order Code	Full Product Name	Energy Consumption kWh/ 1000 h
536284	7.5T20/VIN/820/CL/G/DIM 2/1CT	-
538942	7.5T20/VIN/820/CL/G/DIM 1FFP	-
536292	7.5G63/modern/840/CL/G/DIM 2/1CT	-
538958	7.5G63/modern/840/CL/G/DIM 1FFP	-
539692	7.5G63/modern/840/CL/G/D+CORD black	-
536300	7.5A50/modern/840/CL/G/DIM 2/1CT	-
538966	7.5A50/modern/840/CL/G/DIM 1FFP	-
536318	7.5T20/modern/840/CL/G/DIM 2/1CT	-
538974	7.5T20/modern/840/CL/G/DIM 1FFP	-

Controls and Dimming

Order Code	Full Product Name	Dimmable
461111	2A15/LED/822/FCL/ND 120V 6/1	No
461665	4.5A19b/LEDFilament/820/CL-A/DIM 120V	Yes
461673	5.5ST19/LEDFilament/820/CL-A/DIM 120V	Yes
469759	5G25/PER/822-27/E26/CL/GL/WGD 4/2BC	Yes
477612	6A19/PER/850/CL/G/DIM 4/2BC	Yes
536268	7.5G63/VIN/820/CL/G/DIM 2/1CT	Yes
538926	7.5G63/VIN/820/CL/G/DIM 1FFP	Yes
536276	7.5A50/VIN/820/CL/G/DIM 2/1CT	Yes
538934	7.5A50/VIN/820/CL/G/DIM 1FFP	Yes
539676	7.5A50/VIN/820/CL/G/D+CORD VIN	Yes

Order Code	Full Product Name	Dimmable
536284	7.5T20/VIN/820/CL/G/DIM 2/1CT	Yes
538942	7.5T20/VIN/820/CL/G/DIM 1FFP	Yes
536292	7.5G63/modern/840/CL/G/DIM 2/1CT	Yes
538958	7.5G63/modern/840/CL/G/DIM 1FFP	Yes
539692	7.5G63/modern/840/CL/G/D+CORD black	Yes
536300	7.5A50/modern/840/CL/G/DIM 2/1CT	Yes
538966	7.5A50/modern/840/CL/G/DIM 1FFP	Yes
536318	7.5T20/modern/840/CL/G/DIM 2/1CT	Yes
538974	7.5T20/modern/840/CL/G/DIM 1FFP	Yes

Operating and Electrical

Order Code	Full Product Name	Input Frequency	Voltage (Nom)	Wattage Equivalent	Power (Rated) (Nom)
461111	2A15/LED/822/FCL/N D 120V 6/1	50 or 60 Hz	110-130 V	25 W	2 W
461665	4.5A19b/LEDFilament/820/CL-A/DIM 120V	50 or 60 Hz	110-130 V	32 W	4.5 W
461673	5.5ST19/LEDFilament/820/CL-A/DIM 120V	50 or 60 Hz	110-130 V	35 W	5.5 W
469759	5G25/PER/822-27/E26/CL/GL/W GD 4/2BC	60 Hz	120 V	40 W	5 W
477612	6A19/PER/850/CL/G/DIM 4/2BC	50 to 60 Hz	120 V	40 W	6 W
536268	7.5G63/VIN/820/CL/G/DIM 2/1CT	50 to 60 Hz	120 V	40 W	7.5 W
538926	7.5G63/VIN/820/CL/G/DIM 1FFP	50 to 60 Hz	120 V	40 W	7.5 W
536276	7.5A50/VIN/820/CL/G/DIM 2/1CT	50 to 60 Hz	120 V	40 W	7.5 W

Order Code	Full Product Name	Input Frequency	Voltage (Nom)	Wattage Equivalent	Power (Rated) (Nom)
538934	7.5A50/VIN/820/CL/G/DIM 1FFP	50 to 60 Hz	120 V	40 W	7.5 W
539676	7.5A50/VIN/820/CL/G/D+CORD VIN	50 to 60 Hz	120 V	40 W	7.5 W
536284	7.5T20/VIN/820/CL/G/DIM 2/1CT	50 to 60 Hz	120 V	40 W	7.5 W
538942	7.5T20/VIN/820/CL/G/DIM 1FFP	50 to 60 Hz	120 V	40 W	7.5 W
536292	7.5G63/modern/840/CL/G/DI M 2/1CT	50 to 60 Hz	120 V	25 W	7.5 W
538958	7.5G63/modern/840/CL/G/DI M 1FFP	50 to 60 Hz	120 V	25 W	7.5 W
539692	7.5G63/modern/840/CL/G/D+CORD black	50 to 60 Hz	120 V	25 W	7.5 W

Classic filament LEDbulbs

Order		Input	Voltage	Wattage	Power
Code	Full Product Name	Frequency	(Nom)	Equivalent	(Rated) (Nom)
536300	7.5A50/ modern/840/CL/G/DI M 2/1CT	50 to 60 Hz	120 V	25 W	7.5 W
538966	7.5A50/ modern/840/CL/G/DI M 1FFP	50 to 60 Hz	120 V	25 W	7.5 W

Order		Input	Voltage	Wattage	Power
Code	Full Product Name	Frequency	(Nom)	Equivalent	(Rated) (Nom)
536318	7.5T20/ modern/840/CL/G/DI M 2/1CT	50 to 60 Hz	120 V	25 W	7.5 W
538974	7.5T20/ modern/840/CL/G/DI M 1FFP	50 to 60 Hz	120 V	25 W	7.5 W

Light Technical

Order		Color	Correlated Color Temperature	Luminous Flux	Luminous Flux
Code	Full Product Name	Code	(Nom)	Flux (Nom)	(Rated) (Nom)
461111	2A15/LED/822/FCL/N D 120V 6/1	822	2200 K	220 lm	220 lm
461665	4.5A19b/ LEDFilament/820/CL -A/DIM 120V	820	2000 K	350 lm	350 lm
461673	5.5ST19/ LEDFilament/820/CL -A/DIM 120V	820	2000 K	400 lm	400 lm
469759	5G25/PER/ 822-27/E26/CL/GL/ WGD 4/2BC	822-827	2200-2700 K	350 lm	350 lm
477612	6A19/PER/850/CL/G /DIM 4/2BC	850	5000 K	450 lm	450 lm
536268	7.5G63/VIN/820/CL/ G/DIM 2/1CT	820	2000 K	400 lm	400 lm
538926	7.5G63/VIN/820/CL/ G/DIM 1FFP	820	2000 K	400 lm	400 lm
536276	7.5A50/VIN/820/CL/ G/DIM 2/1CT	820	2000 K	400 lm	400 lm
538934	7.5A50/VIN/820/CL/ G/DIM 1FFP	820	2000 K	400 lm	400 lm
539676	7.5A50/VIN/820/CL/ G/D+CORD VIN	820	2000 K	400 lm	400 lm
536284	7.5T20/VIN/820/CL/ G/DIM 2/1CT	820	2000 K	400 lm	400 lm

Order		Color	Correlated Color Temperature	Luminous Flux	Luminous Flux
Code	Full Product Name	Code	(Nom)	Flux (Nom)	(Rated) (Nom)
538942	7.5T20/VIN/820/CL/ G/DIM 1FFP	820	2000 K	400 lm	400 lm
536292	7.5G63/ modern/840/CL/G/DI M 2/1CT	841	4000 K	250 lm	250 lm
538958	7.5G63/ modern/840/CL/G/DI M 1FFP	841	4000 K	250 lm	250 lm
539692	7.5G63/ modern/840/CL/G/D +CORD black	841	4000 K	250 lm	250 lm
536300	7.5A50/ modern/840/CL/G/DI M 2/1CT	841	4000 K	250 lm	250 lm
538966	7.5A50/ modern/840/CL/G/DI M 1FFP	841	4000 K	250 lm	250 lm
536318	7.5T20/ modern/840/CL/G/DI M 2/1CT	841	4000 K	250 lm	250 lm
538974	7.5T20/ modern/840/CL/G/DI M 1FFP	841	4000 K	250 lm	250 lm

Mechanical and Housing

Order Code	Full Product Name	Bulb Finish	Bulb Shape
461111	2A15/LED/822/FCL/ND 120V 6/1	Clear	A15
461665	4.5A19b/LEDFilament/820/CL-A/DIM 120V	Amber	A19 (A19)
461673	5.5ST19/LEDFilament/820/CL-A/DIM 120V	Amber	ST19
469759	5G25/PER/822-27/E26/CL/GL/WGD 4/2BC	Clear (CL)	G25 (G25)
477612	6A19/PER/850/CL/G/DIM 4/2BC	Clear (CL)	A19 (A19)
536268	7.5G63/VIN/820/CL/G/DIM 2/1CT	-	G63
538926	7.5G63/VIN/820/CL/G/DIM 1FFP	-	G63


Order Code	Full Product Name	Bulb Finish	Bulb Shape
536276	7.5A50/VIN/820/CL/G/DIM 2/1CT	-	A50
538934	7.5A50/VIN/820/CL/G/DIM 1FFP	-	A50
539676	7.5A50/VIN/820/CL/G/D+CORD VIN	-	-
536284	7.5T20/VIN/820/CL/G/DIM 2/1CT	-	T20
538942	7.5T20/VIN/820/CL/G/DIM 1FFP	-	T20
536292	7.5G63/modern/840/CL/G/DIM 2/1CT	-	G63
538958	7.5G63/modern/840/CL/G/DIM 1FFP	-	G63

Classic filament LEDbulbs


Order Code	Full Product Name	Bulb Finish	Bulb Shape
539692	7.5G63/modern/840/CL/G/D+CORD black	-	-
536300	7.5A50/modern/840/CL/G/DIM 2/1CT	-	A50
538966	7.5A50/modern/840/CL/G/DIM 1FFP	-	A50

Temperature

Order Code	Full Product Name	T-Case Maximum (Nom)
461111	2A15/LED/822/FCL/ND 120V 6/1	-
461665	4.5A19b/LEDFilament/820/CL-A/DIM 120V	-
461673	5.5ST19/LEDFilament/820/CL-A/DIM 120V	-
469759	5G25/PER/822-27/E26/CL/GL/WGD 4/2BC	30 °C
477612	6A19/PER/850/CL/G/DIM 4/2BC	35 °C
536268	7.5G63/VIN/820/CL/G/DIM 2/1CT	45 °C
538926	7.5G63/VIN/820/CL/G/DIM 1FFP	45 °C
536276	7.5A50/VIN/820/CL/G/DIM 2/1CT	45 °C
538934	7.5A50/VIN/820/CL/G/DIM 1FFP	45 °C
539676	7.5A50/VIN/820/CL/G/D+CORD VIN	45 °C
536284	7.5T20/VIN/820/CL/G/DIM 2/1CT	45 °C
538942	7.5T20/VIN/820/CL/G/DIM 1FFP	45 °C
536292	7.5G63/modern/840/CL/G/DIM 2/1CT	45 °C
538958	7.5G63/modern/840/CL/G/DIM 1FFP	45 °C
539692	7.5G63/modern/840/CL/G/D+CORD black	45 °C
536300	7.5A50/modern/840/CL/G/DIM 2/1CT	45 °C
538966	7.5A50/modern/840/CL/G/DIM 1FFP	45 °C
536318	7.5T20/modern/840/CL/G/DIM 2/1CT	45 °C
538974	7.5T20/modern/840/CL/G/DIM 1FFP	45 °C

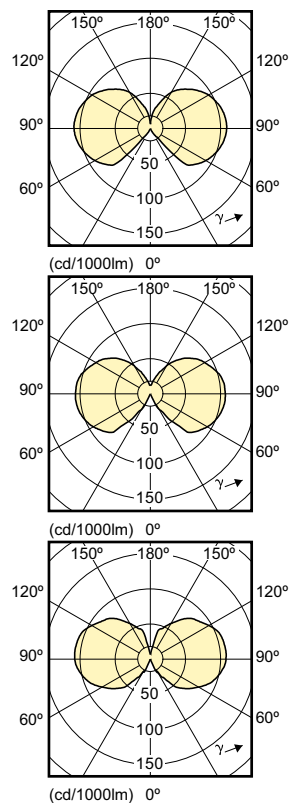

Order Code	Full Product Name	Bulb Finish	Bulb Shape
536318	7.5T20/modern/840/CL/G/DIM 2/1CT	-	T20
538974	7.5T20/modern/840/CL/G/DIM 1FFP	-	T20

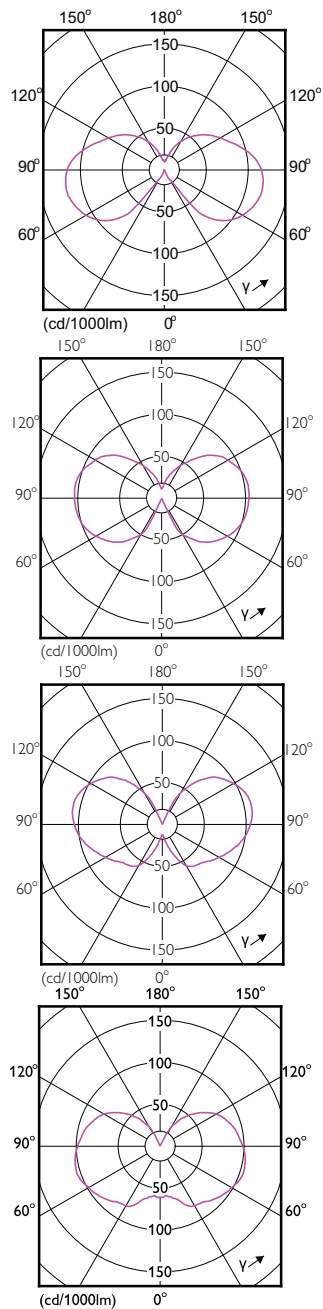

Classic filament LEDbulbs

