

CHLORIDE

Exit/Emergency

44R Series – Selectable

LED edge-lit exit sign



The Chloride new **44RS Line** edge-lit Selectable Red/Green LED exit sign has a new contemporary design with a smaller compact size. The universal 44RS Line exit can be surface mounted (ceiling, wall, end) or recessed mounted (ceiling, wall), it also includes single and double faces all with one specified catalog number.

Project:	
Location:	
Cat.No:	
Type:	
Lamps:	Qty:
Notes:	

Ordering guide

Example: 44RSUE3A

Family	Mounting	AC/Emergency	No of Faces	Housing Finish
44RS				
44RS 44R Family with Selectable red/green LED	S Surface U Universal recessed /surface	A AC Only E¹ Emergency	3² Universal	A Satin aluminum housing with grey end caps W³ White housing and end caps

Footnotes:

- ⁽¹⁾ Emergency units are standard with Self-Diagnostics/Self-Test feature.
- ⁽²⁾ Includes single face with clear background, mirror background and double face with mirror background to reduce inventory and maximize installation flexibility.
- ⁽³⁾ Available only with universal mounting option.

Specifications

Lamp

- Field selectable bright red/green energy efficient LED lamps.
- Signage contains 6" letter height with 3/4" stroke.

Electrical

- Input voltage: 120/277VAC, 60Hz
- Input Power: 3.5W for AC only and 4W for emergency version
- Battery low voltage protection
- Solid-state transfer circuit

Battery

- Maintenance-free, rechargeable Ni-Cad battery
- Provides 90 minutes of emergency illumination
- All versions with batteries feature a self-diagnostic/self-test circuitry
- The SD/ST circuitry performs an automatic test: 1 minute every month, 30 minutes every 6th month of the year, and a 90-minute test on the 12th month of the year. A manual test can be activated at any time by simply pushing the test button.

Codes and compliance

- UL 924
- NFPA 70 (National Electric Code)
- NFPA 101 (Life Safety Code)
- CEC title 20
- Suitable for damp location
- Suitable for 10°C ~ 40°C (50 ~ 104°F) ambient temperature

Warranty

- Three-year limited warranty on electronics,

44RS LED Edge-Lit Selectable Exit Sign


Exit and Emergency

Specifications

Construction

- Surface mount exits are durable extruded aluminum construction with easy to install canopy.
- Universal mount exits have extruded aluminum housing and trim plate.
- Adjustable bar hangers adapt housing for mounting in suspended ceiling.
- Surface mount exits are only available with satin aluminum finish.
- Universal mount exits are available in satin aluminum and white.
- If a surface mount exit with white finish is required, a universal mount exit with white finish must be ordered.
- Satin aluminum housing comes with grey end caps and white housing comes with white end caps.
- Exit panels can be rotated 90° to simplify wall, ceiling or sloped ceiling applications, and can be locked into place.
- Single face exits have a clear and mirror background and double face exits are provided with a mirror background, all 3 panels are included.
- The panel is clear acrylic.
- Chevrons may be applied in the field by simply placing chevrons in the cut-out area of template already attached to panel.
- Remove template after chevron is attached.

Surface Dimensions

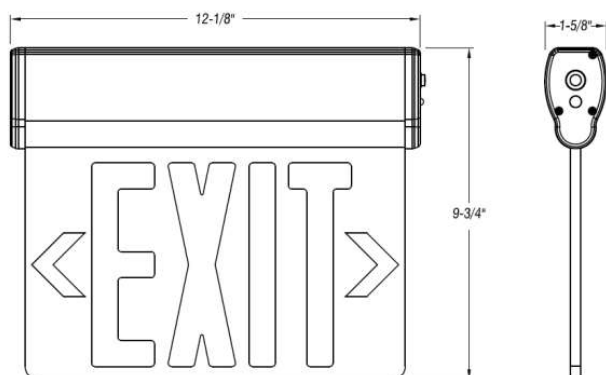

Recessed Dimensions

