

4521M-WH3

FEATURES:


- 50,000 hour rated life.
- Instant on, full brightness.
- Minimum starting temperature -20°C
- RoHS compliant - No Mercury, No Lead

RATINGS:

Voltage:	120VAC
Watts:	22W
Current:	0.180A
Power Factor:	≥ 0.95
Lumens:	1870lm
CRI:	82
CCT:	3000K (Warm White)
Lumens/Watt:	85

CAUTIONS:

- Suitable for damp locations.
- For ceiling mount installation only.
- Not for use with dimmers.
- If supply wires are located within 3 inches (76.2mm), of the ballast, use wire rated for 90°C.
- Do not insert any objects through openings or attempt to open the adapter.
- To prevent a risk of fire do not exceed the maximum ratings of a master switch or timer if this LED fixture is installed in line with these devices.

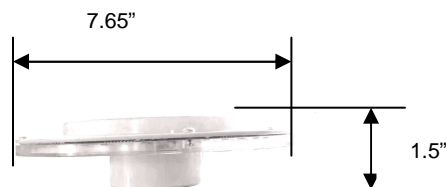

Weight:	0.45lb
Height:	1.5"
Width:	7.65"
Materials:	100% Plastic

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CERTIFICATIONS:

