

Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com



Customer Name:
Project Name:
Fixture Type:



GE
Lighting

23442 - GE 50390 BULK

GE T3.5 (T3 1/2) - Low Voltage

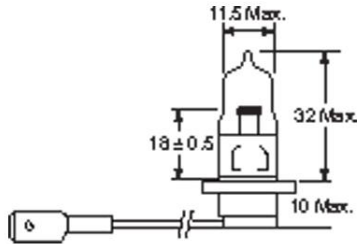

CAUTIONS & WARNINGS

Caution

- Risk of Burn
 - Allow lamp/fixture to cool before handling.

Warning

- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Dispose of lamp in a closed container.
 - Do not exceed rated voltage.
 - Do not touch glass with bare hands.
 - Do not turn on lamp until fully installed.
 - Do not use lamp if outer glass is scratched or broken.
 - Keep children away.
 - Use eye protection when handling lamp.
 - Use protective screen when handling.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	Miniature - T & TL Shape
Bulb	T3.5 (T3 1/2)
Base	PK22S
Filament	C-6
Wattage	40
Voltage	13.2
Rated Life	200 hrs
Bulb Material	Quartz
Atmosphere	Gas-filled
Additional Info	UV reducing
Primary Application	Low Voltage

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	755
Nominal Initial Lumens per Watt	18
Mean Spherical Candlepower (MSCP)	60

DIMENSIONS

Maximum Overall Length (MOL)	1.6500 in(41.9 mm)
Bulb Diameter (DIA)	0.438 in(11.1 mm)
Bulb Diameter (DIA) (MAX)	0.438 in(11.1 mm)
Light Center Length (LCL)	0.710 in(18.0 mm)

PRODUCT INFORMATION

Product Code	23442
Description	GE 50390 BULK
Standard Package	Case
Standard Package GTIN	10043168234426
Standard Package Quantity	400
Sales Unit	Bulk
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	400
UPC	043168234429