


4

3

DWG NO. 1001499 BH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

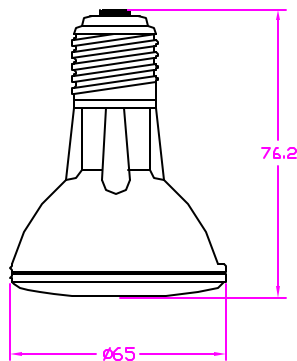

76.2

Ø65

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	50 W
LUMENS	525 Lm
BEAM ANGLE	36°
BEAM SPREAD	FLOOD
CENTER BEAM	1600 cp
Avg LIFE	2500 HRS
BASE TYPE	E-26 MEDIUM
BURN POSITION	ANY

NEXT ASSY	USED ON
APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			USHIO AMERICA, INC. 10550 Camden Dr. Cypress, CA 90630 TITLE 50PAR20/FL HALOGEN LAMP		
MATERIAL COMPOSITE			CONTRACT NO. APPROVALS DRAWN R.AMPARO 09/27/99 CHECKED D.GILCZYNSKI 09/27/99 ENG'G QUAL TROUN ACTVY GOVT ACTVY		
FINISH			SIZE CODE IDENT NO. 1001499 SCALE NONE WEIGHT SHEET 1 OF 1		

4

3

2

1

CAD