

4

3


DWG NO. 1001503

B1 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

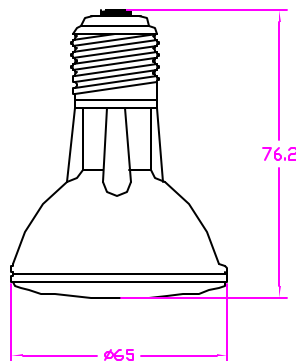

76.2

Ø65

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 300°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	50 W
LUMENS	525 Lm
BEAM ANGLE	24°
BEAM SPREAD	NARROW FLOOD
CENTER BEAM	1700 cp
AVE LIFE	2500 HRS
BASE TYPE	E-26 MEDIUM
BURN POSITION	ANY

NEXT ASSY

USED ON

APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± .XX ± .XXX ± ANGLES ± DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN		
			R.AMPARD		
			DATE		
			09/27/99		
			ENGR		
			D.GILCZYNSKI		
			DATE		
			09/27/99		
			MFG		
			QUAL		
			MATERIAL		
			COMPOSITE		
			FINISH		
			DRWN ACTVY		
			DRWT ACTVY		
			SCALE		
			NONE		
			WEIGHT		
			SHEET		
			1 OF 1		

USHIO AMERICA, INC.

10550 Camden Dr. Cypress, CA 90630

50PAR20/NFL
HALOGEN PAR LAMP

1001503

4

3

2

1

CAD