



Presented By: Candela Corporation
Contact Phone: (800) 922-9226
Contact E-mail: sales@candelacorp.com

Customer Name:
Project Name:
Fixture Type:



GE
Lighting

16541 - 50 PAR 36 WFL
GE PAR36 - Wide Flood

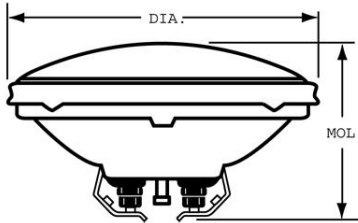

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Wattage	50
Voltage	12
Rated Life	2000 hrs
Primary Application	Wide Flood

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	330
Beam Spread - Horizontal	48.0 - 10.0 °/36.0 - 50.0 °
Beam Spread - Vertical	41.0 - 10.0 °/28.0 - 50.0 °
Center Beam Candlepower (CBCP)	900
Max. Beam Candlepower (MBCP)	900
Nominal Initial Lumens per Watt	6

DIMENSIONS

Maximum Overall Length (MOL)	2.7500 in(69.8 mm)
Bulb Diameter (DIA)	4.500 in(114.3 mm)
Bulb Diameter (DIA) (MAX)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	16541
Description	50 PAR 36 WFL
Standard Package	Case
Standard Package GTIN	00043168165419
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168906487

NOTES

- Filament shield masks direct light
- Top end of bulb is opaque-coated to absorb upward light