
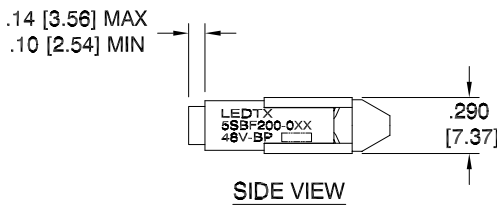


LTR	REVISION	DATE	APPD
A	052018-GP01: ADDED P/N & UPDATED TEST DATA	06-28-18	GP

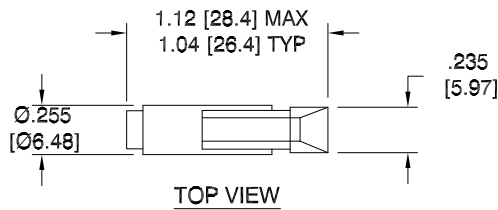

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE
3. BASE MATERIAL: WEDGE = BAKELITE RESIN MELTS AT 200°C  
FLANGE = NICKEL PLATE
4. CONTACT POLARITY: BipolarDC (+ / -)
5. REPLACES INCANDESCENT: 48PSB
6. OPERATING TEMPERATURE: ~-30°C to ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

**ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)**

5SBF200-0AG-048B	AQUA GREEN	48Vdc	0.62 W	0.013 A	1.170cd	519	-	80°
5SBF200-0CW-048B	COOL WHITE	48Vdc	0.61 W	0.013 A	1.300cd	-	8000K	90°
5SBF200-0PB-048B	SUPER BLUE	48Vdc	0.62 W	0.013 A	0.312cd	462	-	85°
5SBF200-0UR-048B	ULTRA RED	48Vdc	0.67 W	0.014 A	0.119cd	654	-	95°
5SBF200-0UY-048B	SUPER YELLOW	48Vdc	0.72 W	0.015 A	0.270cd	596	-	76°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p><b>-PROPRIETARY-</b> This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p> <p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>	<p><b>TITLE</b> <b>5SBF200-0XX-048B</b></p>			
		DWG NO	SCALE	SHEET	DATE
		5SBF200-48V-BP	1:1	1 OF 1	11-19-15
CODE IDENT NO.	DWG BY GP	CHK BY	QA EE	MFG LD	R&D KS
8Z410	11-19-15		06-29-18	06-29-18	06-29-18