
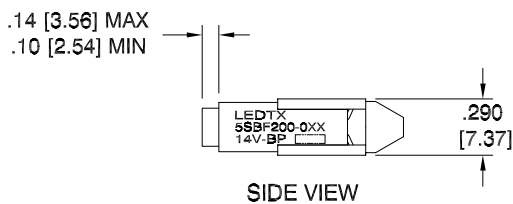


LTR	REVISION	DATE	APPD
A	052018-GP01: UPDATED TEST DATA	06-21-18	GP

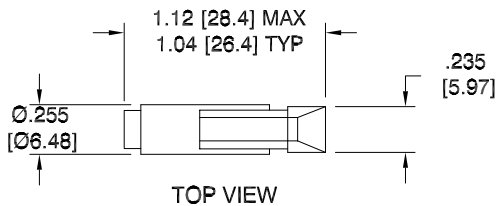

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: RYNITE
3. BASE MATERIAL: WEDGE = BAKELITE RESIN MELTS AT 200°C
FLANGE = NICKEL PLATE
4. CONTACT POLARITY: BipolarDC (+ / -)
5. REPLACES INCANDESCENT: 12PSB
6. OPERATING TEMPERATURE: ~-30°C to ~+50°C

REVISION NOTIFICATION	
<input type="checkbox"/> DLC	
<input type="checkbox"/> UL/ETL	
<input type="checkbox"/> MADE IN USA	
<input type="checkbox"/> CUSTOMER _____	
<input type="checkbox"/> OTHER	
REDLINE CHECKLIST	
<input type="checkbox"/> REDLINE(YES)	
<input type="checkbox"/> DATE: _____	
<input type="checkbox"/> INITIATED BY: _____	
<input type="checkbox"/> ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>	
<input type="checkbox"/> WORK ORDER# _____	

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

5SBF200-0AG-014B	AQUA GREEN	12/14Vdc(@14Vdc)	0.24 W	0.017 A	1.530cd	519	-	80°
5SBF200-0CW-014B	COOL WHITE	12/14Vdc(@14Vdc)	0.24 W	0.017 A	1.700cd	-	8000K	90°
5SBF200-0PB-014B	SUPER BLUE	12/14Vdc(@14Vdc)	0.24 W	0.017 A	0.408cd	462	-	85°
5SBF200-0UR-014B	ULTRA RED	12/14Vdc(@14Vdc)	0.27 W	0.019 A	0.162cd	654	-	95°
5SBF200-0UY-014B	SUPER YELLOW	12/14Vdc(@14Vdc)	0.27 W	0.019 A	0.342cd	596	-	76°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p>-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p> <p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>	<p>TITLE 5SBF200-0XX-014B</p>					
		DWG NO	SCALE	SHEET	DATE		
		5SBF200-14V-BP	1:1	1 OF 1	09-22-09		
CODE IDENT NO.	DWG BY GP	CHK BY	QA EE	MFG LD	R&D KS		
8Z410	09-22-09		06-29-18	06-29-18	06-29-18		