


LTR	REVISION	DATE	APPD
-	RELEASED	06-16-11	

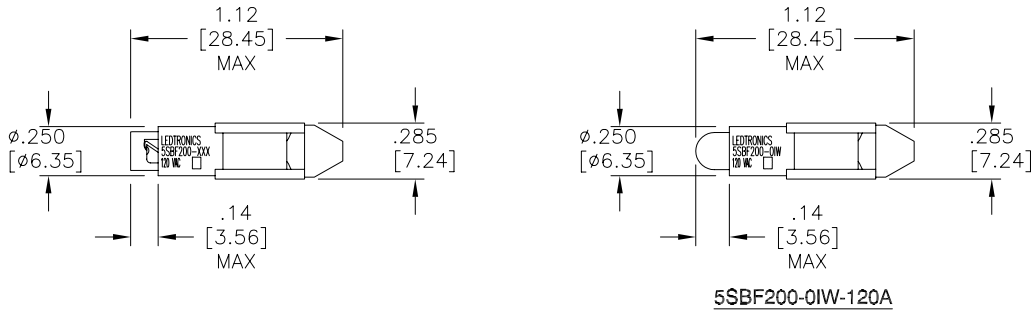

**NOTES:**

1. PARTS WITH (\*) ARE "RoHS" CERTIFIED.
2. SLEEVE MATERIAL: RYNITE
3. BASE MATERIAL: WEDGE = BAKELITE RESIN MELTS AT 200°C  
FLANGE = NICKEL PLATE
4. OPERATING TEMPERATURE: -30°C TO +50°C

5SBF200-0AG-120A*	AQUA GREEN	120VAC	5.5	525	275	120°	*
5SBF200-0CW-120A*	COOL WHITE	120VAC	5.4	8000K	106	120°	*
5SBF200-0ER-120A*	SUPER RED	120VAC	6	637	-	-	*
5SBF200-0IW-120A*	WARM WHITE	120VAC	5.5	3000K	66	120°	*
5SBF200-0PB-120A*	SUPER BLUE	120VAC	5.8	470	74	120°	*
5SBF200-0UG-120A*	SUPER GREEN	120VAC	6	570	29	120°	*
5SBF200-0UO-120A*	SUPER ORANGE	120VAC	5.4	610	65	120°	*
5SBF200-0UR-120A*	ULTRA RED	120VAC	6	660	50	120°	*
5SBF200-0UY-120A*	SUPER YELLOW	120VAC	6	595	39	120°	*
5SBF200-1AG-120A	AQUA GREEN	120VAC	5.5	525	-	-	
5SBF200-2AG-120A*	AQUA GREEN	120VAC	5.5	525	-	-	*
5SBF200-2IW-120A	WARM WHITE	120VAC	5.5	3000K	-	-	
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE	READ mA typ.	λP nm	Iv mcd typ.	VIEWING ANGLE	
<b>ELECTRICAL TEST</b>							



REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

**-PROPRIETARY-**  
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5  
 .XX ± .025 (UNLESS OTHERWISE STATED)  
 ANGLES ± 0°,30'  
 FRACT. ± 1/32

TITLE					
<b>5SBF200-XXX-120A</b>					
DWG NO	SCALE	SHEET	DATE		
5SBF200-120VAC	1:1	1 OF 1	06-16-11		
CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	MM 06-16-11	PL 06-16-11			BJ 06-16-11