



LTR	REVISION	DATE	APPD
-	RELEASED	10-06-15	



ACTUAL SIZE

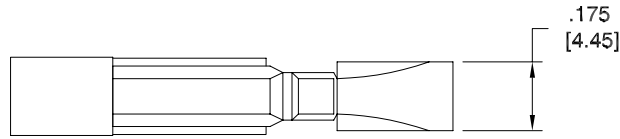

TOP VIEW

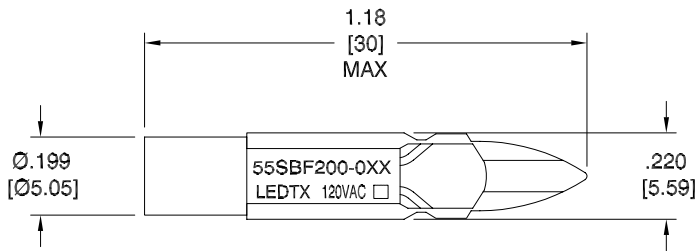

SIDE VIEW

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: EPOXY
3. BASE MATERIAL: BLACK BAKELITE
4. OPERATING TEMPERATURE: ~-30°C to ~+50°C



REVISION NOTIFICATION

- DLC
- UL/ETL
- MADE IN USA
- CUSTOMER _____
- OTHER

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

55SBF200-0AG-120A	AQUA GREEN	120Vac	-	0.010 A	-	519	-	80°
55SBF200-0CW-120A	COOL WHITE	120Vac	-	0.010 A	0.106cd	-	8000K	90°
55SBF200-0UR-120A	ULTRA RED	120Vac	-	0.010 A	0.050cd	650	-	85°
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λP nm	COLOR TEMP. (K)	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)



-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE 55SBF200-0XX-120A					
DWG NO	SCALE	SHEET	DATE		
55SBF200-120VAC	2:1	1 OF 1	10-06-15		
CODE IDENT NO. 8Z410	DWG BY GP 10-06-15	CHK BY PL 10-07-15	QA	MFG	R&D