T-2 TELEPHONE SLIDE BASE #1, #2, & #5 SINGLE CHIP LEDs

ORDERING INFORMATION: 5TSB1121 WC 1 - 24V/25
(A) (B) (C) (D)

(A) MODEL
1TSB1691
2TSB1691
5TSB1121

(B) LED LENS COLOR
WC = WATER CLEAR

(C) LED EMITTING COLOR & WAVELENGTH
1 = ULTRA RED (660nm)
2 = STD. RED (630-635nm)
U2 = ULTRA HI EFF. RED (623-630nm)
3 = STD. ORANGE (605-610nm)
U3 = ULTRA ORANGE (612-620nm)
4 = STD. YELLOW (585nm)
*S4 = ULTRA YELLOW (590-595nm)
5 = STD. GREEN (565-570nm)
*6NW = ULTRA PURE GREEN (520-530nm)
*8NW = FLUORESCENT "WHITE" (NO nm VALUE)
*10NW = ULTRA BLUE (465-475nm)
*11NW = BLUISH GREEN (498-508nm)
*12NW = SOFT WHITE (NO nm VALUE)
***Max. Continuous current 10mA.**

MODEL: 1TSB1691

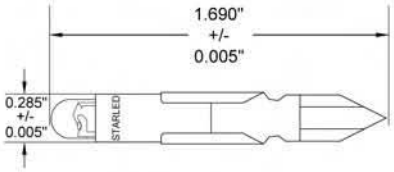

MODEL: 2TSB1691

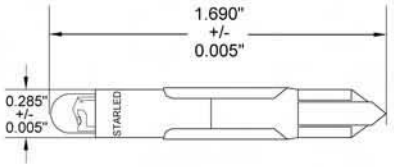

(D) STANDARD DC & AC OPERATING VOLTAGES/mA
5V/25, 6V/25, 12V/25, 24V/25, 28V/25, 48V/12, 60V/15 & 120V/6
APPLICATION MUST BE SPECIFIED WHEN ORDERING:
VAC = ALTERNATING CURRENT VDC(V) = DIRECT CURRENT
Note: Please call factory for other voltages.

DIRECT INCANDESCENT LAMP REPLACEMENTS
1TBS1691: A1, B2, C2, E1, 24E1, 24EX, ETC...
2TSB1691: 6C, 10X, 12B, 24A, 24E, 24X, 35A, 48D, ETC...
5TSB1121: 24PSB, 28PSB, 48PSB, 60PSB,120PSB, ETC...

MODEL: 5TSB1121



Note: For utility applications please call the factory.

HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE