


PRELIMINARY



STARLED[®], INC.


T2 TELEPHONE SLIDE BASE #1, #2 & #5 SINGLE CHIP LOW DOME LED

ORDERING INFORMATION: $\frac{5TSBLD112}{(A)}$ $\frac{1}{(B)}$ $\frac{WC}{(C)}$ $\frac{8NW}{(D)}$ - $\frac{24V}{(E)}$

(A) MODEL

1TSBLD169
2TSBLD169
5TSBLD112

MODEL 1TSB169

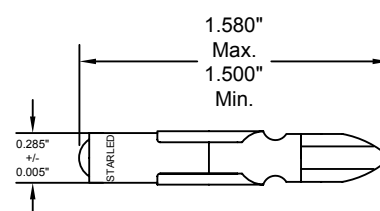

(B) NUMBER OF LEDs

1 = 1, 5mm Low Dome(OVER 100° Viewing Angle)


(C) LED LENS COLOR

WATER CLEAR

(D) LED EMMITED COLOR & WAVE LENGHT

U2 = ULTRA HI EFF. RED (623~630nm)
U3 = ULTRA ORANGE (612~620nm)
U4 = ULTRA YELLOW (590~595nm)
6NW = ULTRA PURE GREEN (520~530nm)
8NW = FLOURESCENT WHITE 5000K ~ 6000K
10NW = BLUE (465~475nm)
12NW = SOFT WHITE 2700 ~ 3200K

MODEL 2TSB169

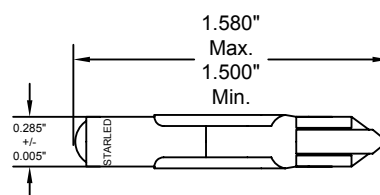


(E) VOLTAGE DC/AC & Max. mA.

6V, 12V, 24V, 28V, 48V, 60V/10, 85V & 120V

Note: PLEASE CALL FOR OTHER VOLTAGES

MODEL 5TSB112

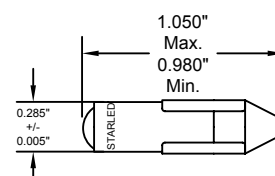

HOUSING MATL.. UL94-V0 APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.