



Val-U-Pak Plus (77L)

CORE & COIL HID MH BAL 100W M90/140 QUAD KIT

Our VAL-U-PAK Plus magnetic HID replacement kits assemble the required components — including lamp, core and coil, the appropriate capacitor, ignitor (where required), mounting bracket and hardware, and instructions — in one convenient package. This saves valuable time for MRO and contractor applications.

Product data

• General Characteristics

Lamp Type	100 MH
Number of Lamps	1 piece
Line Voltage	120/208/240/277 V
Input Current (Operating)	1.15/0.66/0.58/0.5 A
Line Frequency	60 Hz
Circuit Type	HX-HPF
Ballast Type	Magnetic HID
Base Model	71A5390
Core Size	3 X 4 (2 LW)
Suitable for Outdoor use?	Yes
Ignitor Catalog Number	LI533-H4
Ignitor Temp Rating	105°C
Capacitor value [µF]	12 MFD
Capacitor Catalog Number	7C120M30RA
Capacitor Requirements	280V
Capacitor Temp Rating	105°C
Capacitor Dia/Oval Dim	1.65 in
Capacitor Height	2.75 in
Family Name	Core & Coil MH

• Operating Characteristics

Automatic restart	No
Input Voltage at Lamp Dropout	90/156/180/208 V
Nominal Open Circuit Voltage	260 V
Inp. Current (Open Circuit)	2.5/1.5/1.3/1.12 A

Input Current (Starting)	1.24/0.54/0.45/0.4 A
Input Current Short Circuit	0.63-0.95/0.43-0.65/0.37-0.55/0.29-0.4 A
Secondary ShortCircuit Current	1.35-1.7 A
Input Power Gear	129 W
Constant wattage deviation	12%
Ballast factor	1 -
Power Factor	0.90

• Wiring Characteristics

Wire Striplength	0.5 mm
Wire Length by Color	12"
Wire Type	Stranded
Allowed Wiring Config(Remote)	Yes
Max Dist. Ball to Lamp(Remote)	20'
Recommended Fuse	10/5/5/4 A

• System Chars on driver level

Rated Lamp Watts	100W
------------------	------

• Product Dimensions

Length A1	3.9 in
Length A2	3.5 in
Width B1	2.8 in
Coil Depth C1	3.07 in
Stack Height C2	1.5 in
Width B2	2.4 in

PHILIPS

Val-U-Pak Plus (77L)

• Approval & Application Chars


Approbation Marks	ULR, CSA, RoHS
CE marking	No
VDE certificate	No
UL Listed	No
CSA certificate	Yes
CCC certificate	No
Chia Quality Certificate	No
Temperature marking	B/B/A/A
CEC Listing	No
cUL certificate	No
EISA	No
ETL Certificate	No
FIDE Certificate	No
NOM certificate	No
RoHS Compliant	Yes
SASO Certificate	No
UL Recognized	Yes
ANSI Code	M90/M140

HiPot Test (1 minute)	2000 V
HiPot Test (2 seconds)	2500 V
Open Circ Voltage Test (Volts)	240-300 V
UL Insulation Class	H(180°C)
UL Temperature Code	1029B

• Product Data


Product number	77L5390001D
Full product name	MH BAL 100W M90/140 QUAD KIT
Short product name	MH BAL 100W M90/140 QUAD KIT
Pieces per Sku	1
Skus/Case	1
Bar code on pack	781087068175
Bar code on case	30781087068176
Logistics code(s)	913710661301
eop_net_weight_pp	3.443 kg

Dimensional drawing

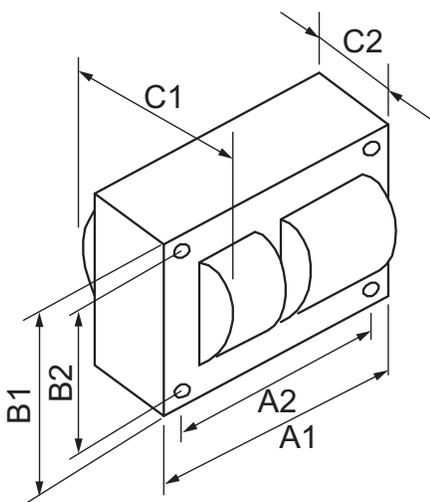

CORE & COIL HID MH BAL 100W M90/140 QUAD KIT

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	B2 (Norm)	C1 (Norm)	C2 (Norm)
MH BAL 100W M90/140 QUAD KIT	3.9	3.5	2.8	2.4	3.07	1.5

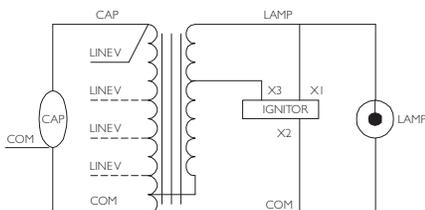

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 10
data subject to change