



# Core & Coil (71A) LPS

## CORE & COIL HID LPS BAL 90W L72 QUAD C&C

The basic ballast is the open core and coil which is most often used as a component within a lighting luminaire. The core and coil also forms the nucleus of Philips Advance's five other ballast configurations.

### Product data

#### • General Characteristics

Lamp Type	90W LPS
Number of Lamps	1 piece
Line Voltage	120/208/240/277 V
Input Current (Operating)	1.06/0.6/0.53/0.5 A
Line Frequency	60 Hz
Circuit Type	HX-HPF
Ballast Type	Magnetic HID
Base Model	71A0590
Core Size	4 1/4 x 4 3/4 (2 coil)
Suitable for Outdoor use?	Yes
Capacitor value [μF]	17.5 MFD
Capacitor Catalog Number	7C175M30RA
Capacitor Requirements	300V
Capacitor Temp Rating	105°C
Capacitor Dia/Oval Dim	1.65 in
Capacitor Height	3.7 in
Family Name	Core & Coil LPS

#### • Operating Characteristics

Automatic restart	No
Input Voltage at Lamp Dropout	65/110/120/140 V
Nominal Open Circuit Voltage	515 V
Inp. Current (Open Circuit)	4.1/2.3/2/1.75 A
Input Current (Starting)	1.15/0.65/0.6/0.52 A

Input Current Short Circuit	0.32-0.48/0.17-0.26/0.16-0.24/0.13-0.2 A
Secondary ShortCircuit Current	0.9-1.1 A
Input Power Gear	125 W
Constant wattage deviation	10%
Ballast factor	1 -
Power Factor	0.90

#### • Wiring Characteristics

Wire Striplength	0.5 mm
Wire Length by Color	12"
Wire Type	Stranded
Allowed Wiring Config(Remote)	Yes
Max Dist. Ball to Lamp(Remote)	Determined by AWG used
Recommended Fuse	11/6/5/5 A

#### • System Chars on driver level

Rated Lamp Watts	90W
------------------	-----

#### • Product Dimensions

Length A1	4.8 in
Length A2	4.4 in
Width B1	4.3 in
Coil Depth C1	3.25 in
Stack Height C2	2.25 in
Width B2	3.9 in

**PHILIPS**

## Core & Coil (71A) LPS

### • Approval & Application Chars


Approbation Marks	ULR, CSA, RoHS
CE marking	No
VDE certificate	No
UL Listed	No
CSA certificate	Yes
CCC certificate	No
Chia Quality Certificate	No
Temperature marking	A/A/A/A
CEC Listing	No
cUL certificate	No
EISA	No
ETL Certificate	No
FIDE Certificate	No
NOM certificate	No
RoHS Compliant	Yes
SASO Certificate	No
UL Recognized	Yes
ANSI Code	L72

HiPot Test (1 minute)	2000 V
HiPot Test (2 seconds)	2500 V
Open Circ Voltage Test (Volts)	460-565 V
UL Insulation Class	H(180°C)
UL Temperature Code	1029A

### • Product Data


Product number	71A0590500D
Full product name	LPS BAL 90W L72 QUAD C&C
Short product name	LPS BAL 90W L72 QUAD C&C
Pieces per Sku	1
Skus/Case	4
Bar code on pack	781087120019
Bar code on case	50781087120014
Logistics code(s)	913700502061
eop_net_weight_pp	4.623 kg

### Dimensional drawing

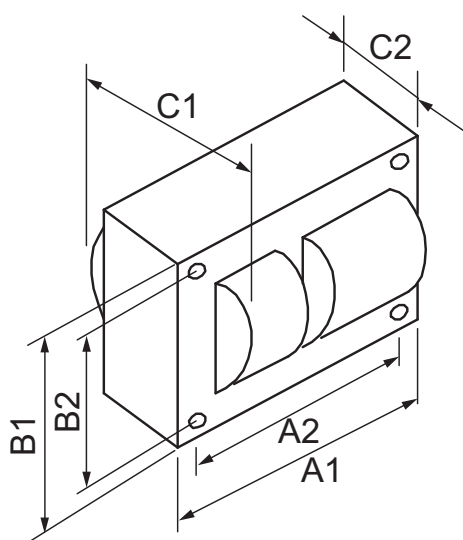

### CORE & COIL HID LPS BAL 90W L72 QUAD C&C

Product	A1 (Norm)	A2 (Norm)	A3 (Norm)	B1 (Norm)	B2 (Norm)	C1 (Norm)	C2 (Norm)	C3 (Norm)
LPS BAL 90W L72 QUAD C&C	4.8	4.4	-	4.3	3.9	3.25	2.25	-

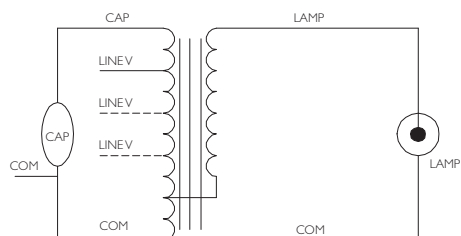



© 2015 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, August 29  
data subject to change