

LET-75 L LET-75 L BF

SPECIFICATIONS

UL File Numbers

UL and C-UL Recognized
UL FILE # E 164062

Available Versions

901075000L-Standard Version
901075000LBF - Bottom Feed Version


Mechanical and Thermal

Dimensions for 901075000L:
56 x 35.4 x 22 (mm)
2.2 x 1.4 x 0.87 (in)
Dimensions for 901075000LBF:
65 x 38 x 22 (mm)
2.56 x 1.5 x 0.87 (in)
Weight 3 ounces
Lead wire length 6"
 ΔT 45°C
Max. case temp. 90°C
Max. ambient temp. 45°C
Output wire – Red 14AWG 200°C
Input wire – White/Black 18AWG 150°C
Aluminum casing


Electrical

Maximum load 75W
Minimum load w/o dimmer 10W
Minimum load with dimmer 20W
Input 120V 50/60Hz
Output at max. load 11.7V 40kHz
Input current at max. load 0.635A
Output current at max. load 6.35A
Power factor min. 0.95
Dimmable


901075000L

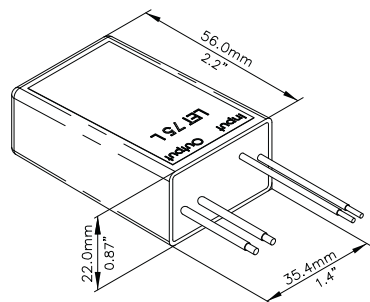

Output Voltage vs. Load at 120V

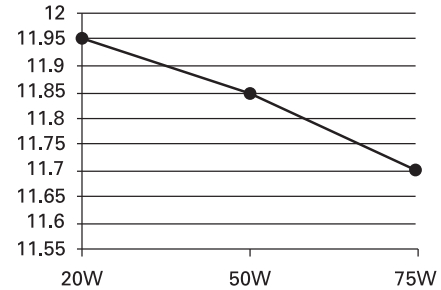


Output vs. Input at Max. Load

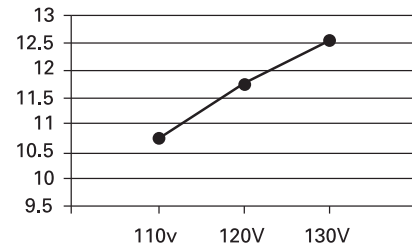

Short Circuit and Thermal Protection

Electronic internal resettable protection.
Patent pending auto heat regulation
that also automatically acts as overload
protection.

901075000LBF

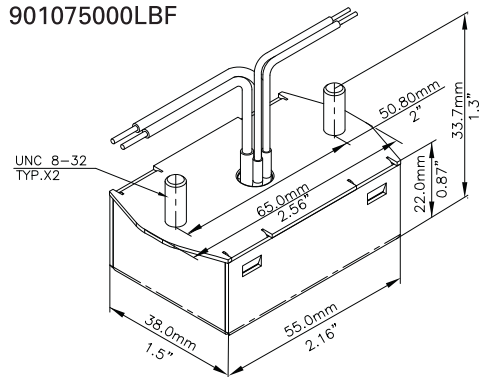




See reverse side for more information →



LET-75 L

LET-75 L BF

Mounting Instructions

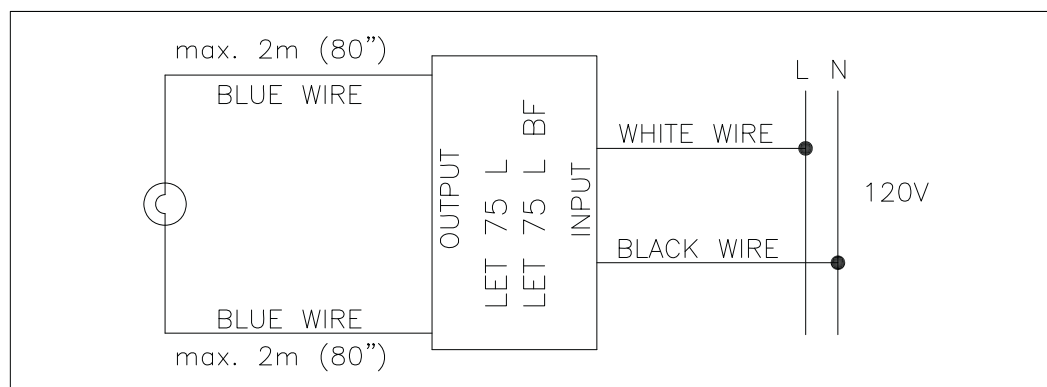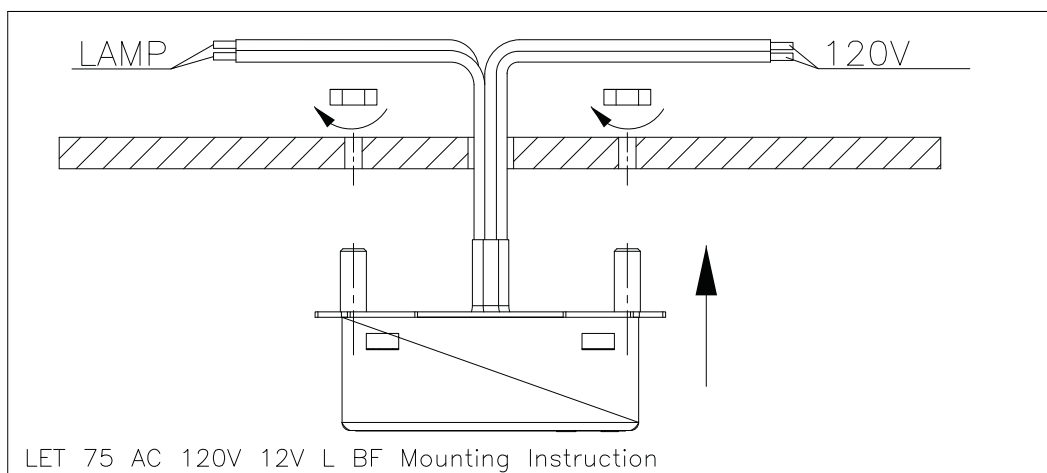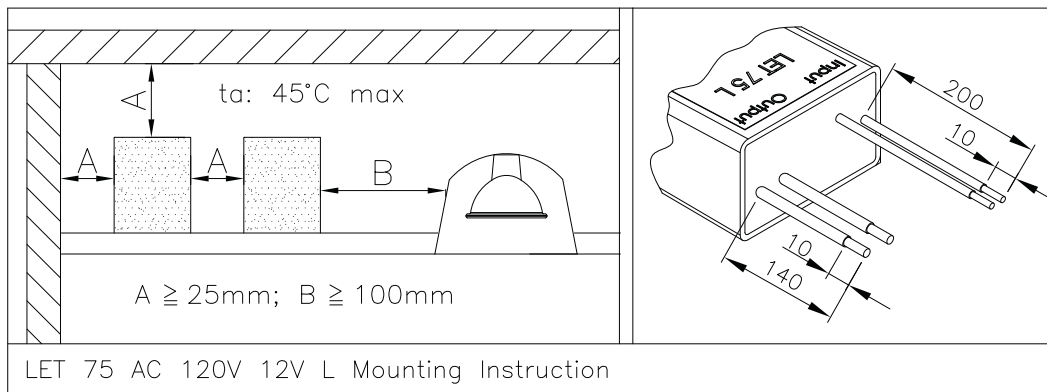

Safety Instructions:

1. Always disconnect power before installation and/or removal of the unit.
2. Install in accordance with national and local electrical codes.
3. Wires: Input wires – 18AWG
Output wires – 14AWG.