



## LED LAMPS

# ProLED<sup>®</sup> Omnidirectional A-Shape Series



Dimmable



Omnidirectional



Enclosed Rated



ENERGY STAR<sup>®</sup>

ProLED<sup>®</sup> Omnidirectional A-Shape Series dimmable lamps feature superior thermal construction for long life and energy efficient illumination



**Omnidirectional Optical Design Provides 230° Light Distribution**

**UL Listed for Damp Location & Enclosed Fixtures**

**ENERGY STAR<sup>®</sup> Certified**

**Backed by a 3-Year Warranty**

### Applications:

- Home
- Education
- Healthcare
- Hospitality
- Retail

### Markets:

- Residential
- Commercial



Contact Your Customer Care Specialist For Pricing, Orders And Technical Support.

800.677.3334 [www.halcolighting.com](http://www.halcolighting.com)

# ProLED<sup>®</sup>

## Omnidirectional A-Shape Series


Product #: \_\_\_\_\_ Type: \_\_\_\_\_

Project: \_\_\_\_\_ Date: \_\_\_\_\_


Comments: \_\_\_\_\_ Initials: \_\_\_\_\_

### Specifications

- Available in 2700K, 3000K, 4000K or 5000K CCT
- UL Listed for damp location
- Dimmable to 10% for design flexibility (excludes 3-way lamps)
- 220° degree beam angle creates uniform distribution of light
- 3-year warranty
- 80196, 80197, 80198, 80199: This product is warranted for 5 years from date of purchase
- Rated for ICAT fixtures

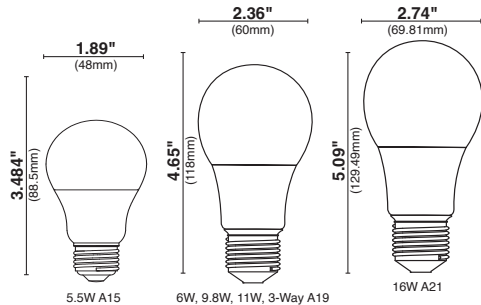

### Savings Comparison

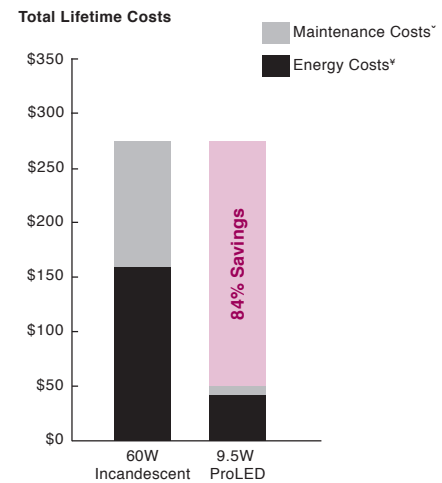

† Maintenance costs based on 15 minutes at \$40 per/hr

\* Energy costs based on \$0.11 kWh



### Ordering Information

	Watt	Base	Product #	Product Code	Volts	Color Temp.	CRI	Lumens	Useful Life*	Beam Angle	Pkg. Qty.	MOL	Equivalent Wattage	Certification
<b>A15</b>														
⊕	5.5W	E26	88008	A15FR5-827-DIM-LED4	120	2700K	80	450	25,000	220°	1/48	3.26"	40W	UL, ES
⊕	5.5W	E26	80197	A15FR5/830/OMNI2/LED	120	3000K	82	450	25,000	230°	1/6	3.48"	40W	UL, ES
⊕	5.5W	E26	88010	A15FR5-840-DIM-LED4	120	4000K	80	450	25,000	220°		3.26"	40W	UL, ES
⊕	5.5W	E26	88011	A15FR5-850-DIM-LED4	120	5000K	80	450	25,000	220°		3.26"	40W	UL, ES
<b>A19</b>														
⊕	6W	E26	84965	A19FR6/827/OMNI3/LED	120	2700K	82	480	15,000	220°	1/6	4.33"	40W	UL, ES
⊕	6W	E26	84966	A15FR6/830/OMNI3/LED	120	3000K	82	480	15,000	220°	1/6	4.33"	40W	UL, ES
⊕	5.5W	E26	88014	A19FR6-840-DIM-LED4	120	4000K	80	450	15,000	220°		4.33"	40W	ETL, ES
⊕	5.5W	E26	88015	A19FR6-850-DIM-LED4	120	5000K	80	450	15,000	220°		4.33"	40W	ETL, ES
⊕	9W	E26	88016	A19FR9-827-DIM-LED4	120	2700K	80	800	15,000	220°	1/6	4.33"	60W	UL, ES
⊕	9.8W	E26	84968	A15FR9/830/OMNI3/LED	120	3000K	82	800	15,000	220°	1/6	4.33"	60	UL, ES
⊕	9W	E26	88017	A15FR9-830-DIM-LED4	120	3000K	80	800	15,000	220°	1/6	4.33"	60W	UL, ES
⊕	9W	E26	88018	A19FR9-840-DIM-LED4	120	4000K	80	800	15,000	220°		4.33"	60W	ETL, ES
⊕	9W	E26	88019	A19FR9-850-DIM-LED4	120	5000K	80	800	15,000	220°		4.33"	60W	ETL, ES
	11W	E26	84971	A19FR11/827/OMNI3/LED	120	2700K	82	1100	15,000	220°	1/6	4.33"	75W	UL, ES
	11W	E26	84972	A19FR11/830/OMNI3/LED	120	3000K	82	1100	15,000	220°	1/6	4.33"	75W	UL, ES
	11W	E26	88022	A19FR11-840-DIM-LED4	120	4000K	80	1100	15,000	220°		4.56"	75W	UL, ES
	11W	E26	88023	A19FR11-850-DIM-LED4	120	5000K	80	1100	15,000	220°		4.56"	75W	UL, ES
<b>A21</b>														
⊕	17W	E26	88048	A21FR17-827-DIM-LED4	120	2700K	80	2000	15,000	220°		4.92"	125W	UL, ES
⊕	17W	E26	88049	A21FR17-830-DIM-LED4	120	3000K	80	2000	15,000	220°		4.92"	125W	UL, ES
⊕	17W	E26	88050	A21FR17-827-DIM-LED4	120	4000K	80	2000	15,000	220°		4.92"	125W	UL, ES
⊕	17W	E26	88051	A21FR17-830-DIM-LED4	120	5000K	80	2000	15,000	220°		4.92"	125W	UL, ES
⊕	16W	E26	84975	A21FR16/840/OMNI3/LED	120	4000K	82	1600	15,000	220°		5.09"	100W	UL, ES
⊕	16W	E26	84976	A21FR16/850/OMNI3/LED	120	5000K	82	1600	15,000	220°		5.09"	100W	UL, ES
⊕	21W	E26	88052**	A21-FR21-930-DIM-LED-T20	120	3000K	80	2600	15,000	220°			150W	UL, ES
⊕	21W	E26	88053**	A21-FR21-950-DIM-LED-T20	120	5000K	80	2600	15,000	220°			150W	UL, ES

⊕ NEW ITEM!

\* Not rated for enclosed fixtures.

\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

\*\* Dimmable

Represents lamps that are ENERGY STAR<sup>®</sup> certified.

Warranty – Commercial / Industrial: This product is warranted for 3 years from the date of purchase.

May not be compatible with all dimming systems, dimming performance may vary by system, please check the website [www.halcolighting.com/ProLEDdim](http://www.halcolighting.com/ProLEDdim) for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life. 25,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

Halco Lighting Technologies 2940 Pacific Drive | Norcross, GA 30071 | Toll Free 800.677.3334 | Phone 770.242.3612 | Fax 800.880.0822 | [halcolighting.com](http://halcolighting.com) | Atlanta | Chicago | Cleveland | Houston | Phoenix

© 2024 Halco Lighting Technologies, LLC. All rights reserved. Halco and ProLED are registered trademarks of Halco Lighting Technologies. All sizes and specifications are subject to change. 061124.