

Albeo™ LED Luminaire

LED Linear Industrial Lighting
(ALV2 - Series)



Project name _____
Date _____
Type _____

Product Description:

The Albeo™ ALV2-series LED luminaire is an energy-efficient, low maintenance alternative to traditional fluorescent in a variety of commercial, low bay lighting applications. The ALV2-series offers customers the best mix of value and performance.

Performance Highlights:

Light Output Range: 2,000 – 16,000 lumens

CRI: 80 CRI Standard (90CRI Refer to factory for lead-time)

CCT: 3000K, 3500K, 4000K, 5000K

Distributions: 120° diffused lens

Input Voltage: 120V-277V, 347V, & 480V

Efficiency: Up to 160 LPW

Fixture Rated: L70 @ 100,000 hours minimum @ 45°C

Limited Warranty: 5 Years

Temperature Rating: -30°C to +45°C (-22°F to 113° F)



Controls & Sensors: 0-10V standard, Motion & daylight sensor options. Wireless ZigBee Daintree compliant options.

Product Images:




Product Dimensions:

4 Ft.



8 Ft.



Certifications:



GE current
a Daintree company

Ordering Number Logic

LED Linear Industrial Lighting

(ALV2 - Series)



Project name _____

Date _____

Type _____

ALV2

T

W




PRODUCT ID	VOLTAGE	FIXTURE LENGTH	LUMEN OUTPUT	DRIVE CURRENT	LED COLOR TEMP	OPTICS BEAM	FIXTURE TYPE	SENSOR/ WIRELESS	CONTROL WIRING	EMERGENCY	MOUNTING	CORD	PLUG	FINISH	OPTIONS
A = Albeo	0 = 120-277V	4T = 4 ft	02 = 2,000	T = Standard Efficiency	80 Plus CRI	Diffused Lens:	S = Stand Alone	Q = None	Q = None/ No External Control Wiring	Q = None	ST = Standard	K = Knockout	Q = None	W =	Blank =
L = Linear	1 = 120V*		03 = 3,000		38 = 3000K	Maximum Glare Reduction	C = Continuous Run	A = Occ Sense	E = Battery Backup	E = Battery Backup	51 = Cable/ Toggle 5 ft.	A = 6 ft.	A = 15A Straight Plug	White Powder Coat	No Special Options
V = Value Series	4 = 277V*		04 = 4,000		C8 = 3500K		Note: For Continuous Runs, Starter Kit 93095878 must be ordered for each run.	B = Occ Sense	V = External 0-10V Control Wires	Note: Battery Backup not available at 347/480V	52 = Cable/ Toggle 10 ft.	B = 12 ft.	B = 20A Straight Plug		1PK =
	5 = 480V*		05 = 5,000		48 = 4000K			P = Daylight Sense w/Occupancy	Note: V option not available with dimming and ZigBee sensors		53 = Cable/ Toggle 15 ft.	18ga cord	C = 15A Twistlock Plug		Single Pack (for dist. Stocking. Default is job pack not 1PK)
	D = 347V*		06 = 6,000		58 = 5000K	1D = 120° Diffused Lens		S = Daylight Sense w/Occupancy					D = 20A Twistlock Plug		
2 = LED Generation	*Specify single voltage if plug, sensor, or wireless needed.	8T = 8 ft	04 = 4,000 06 = 6,000 08 = 8,000 10 = 10,000 12 = 12,000 16 = 16,000		90 Plus CRI 39 = 3000K C9 = 3500K 49 = 4000K 59 = 5000K			W = Bi-level dimming/ Stairwell setting sensor							
								Full Featured							
								1 = 20' Motion Sensor FSP221 w/Daylight & High-Low Dimming							
								2 = 40' Motion Sensor FSP221 w/Daylight & High-Low Dimming (requires remote to modify default settings sold separately)							
								ZigBeeWireless Daintree™							
								4 = ZigBee Wireless Daintree™ Enabled w/Motion Sensor							
								T = ZigBee Wireless Daintree™ Enabled (no sensor)							



80 CRI @ 5000K CCT					
FIXTURE LENGTH	OUTPUT LUMENS	TYPICAL DELIVERED LUMENS	TYPICAL POWER		MAX AMBIENT TEMP.
			120-277	340-480	
4 ft	2,000	2,000	14	16	143
4 ft	3,000	3,000	20	22	150
4 ft	4,000	4,000	26	29	154
4 ft	5,000	4,900	33	36	148
4 ft	6,000	5,900	41	44	144
4 ft	8,000	7,700	59	67	131
8 ft	4,000	4,000	25	28	160
8 ft	6,000	6,000	38	41	158
8 ft	8,000	7,900	52	60	152
8 ft	10,000	9,800	67	75	146
8 ft	12,000	11,700	83	91	141
8 ft	16,000	15,600	119	129	131

CRI	CCT	T OUTPUT
80	5000K	100%
	4000K	98%
	3500K	97%
	3000K	93%
90	5000K	89%
	4000K	85%
	3500K	83%
	3000K	81%

Mounting & Accessories

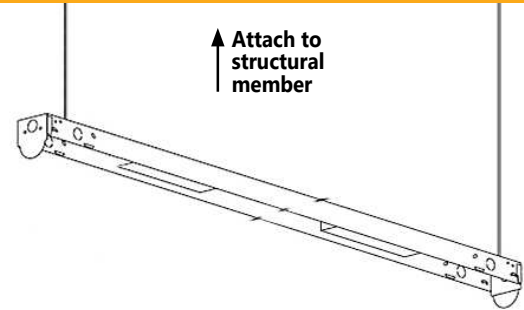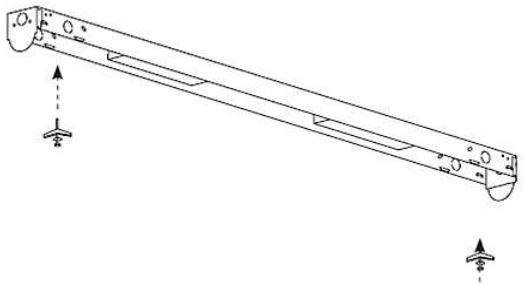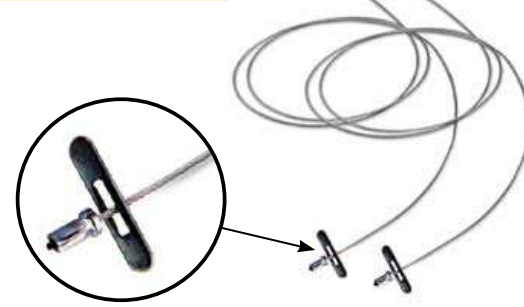MOUNTING OPTIONS	IMAGE	ORDER LOGIC CODE
Standard Chain/Cable Mount Available on all fixture configurations (chain not included). Cable w/ hook can be ordered as an accessory.		ST = Standard
Surface Mount (optional) Available on all fixture configurations. Standard mounting option is surface mount ready.		ST = Standard
Cable with toggle (optional) Order separately. 5 ft., 10 ft., 15 ft., 20 ft. lengths available.		51 = Cable/Toggle 5 ft. - Pair 52 = Cable/Toggle 10 ft. - Pair 53 = Cable/Toggle 15 ft. - Pair 54 = Cable/ Toggle 20 ft. - Pair Max Load 200 lbs. Per Pair

See "Installation Instructions" for mounting details.

Albeo™ LED Luminaire

LED Linear Industrial Lighting
(ALV2 - Series)



Project name _____

Date _____

Type _____

LED & Optical Assembly

CRI: 80 Standard (90 contact factory for lead-time)

Rated Lumen Depreciation: L70 @ 100,000 hrs

TM-21 Calculation at 25°C: L90 @ 100,000 hrs*

*L85 @ 100,000 hrs for 4T10 and 8T20 configurations

Distribution/Lenses:

Precision lens system provides optimized illumination for open floor plan

120° w/diffused lens standard

Wire Guard Option: White painted wire guard for added protection. Easy field installation.

Electrical

Input Voltage: 120-277V, 347V or 480V

Input Frequency: 50/60Hz

Output Frequency/Flicker Rate: NEMA 77

System Power Factor (PF): >0.9*

Total Harmonic Distortion (THD): <20%*

LED Driver Type: Class 2, 3kV surge protection

EMI: FCC CFR Title 47 Part 15, Class A

* PF and THD may vary with options

Ratings & Evaluations

Operating Temperature: -30°C to +45°C (-22°F to 113°F)

Storage Temperature: -40°C to +70°C

Surge Protection: 3kV driver surge protection

Location: UL 1598 Suitable for Damp Locations

Safety: UL/cUL Listed (UL/cUL)

Environmental: RoHS compliant



DLC Premium qualified models available
Please refer to <http://www.designlights.org/QPL>
for complete information

Construction & Finish

Housing: Steel body

Lensing: Polycarbonate diffused

Paint: White Prepaint

No glass in housing or lenses

Weight: 4 ft. - 11lbs max; 8 ft. - 19lbs max

Controls

Standard Dimming: 0-10VDC

Minimum Dimming: Dim down to 10%

Wireless Networking & Sensing:

ZigBee Wireless Daintree with Occ Sensor – Sensor 4

ZigBee Wireless Daintree with No Sensor – Sensor T

Wattstopper FSP Series Motion + daylight + IR config (IR remote sold separately) – Sensor 2

Wattstopper FSP remote = SKU# 93076263

Sensor Switch LSXR Series - Sensor A, B, P, or S

LSXR Aisle Sensor Optic = SKU# SWI0110

Stairwell Applications: Sensor W = Bi-level dimming dims to 25% with low traffic and then to off for maximum energy savings. Compatible with EMBB.

Mounting

Typical Mounting: Standard Chain/Cable or Surface mount ready.

Cord & Plugs:

Standard = knockout access (no cord, no plug)

6 ft. 18-3 - Cord A

12 ft. 18-3 - Cord B

15A, 20A, Straight or twist lock plug – Plug A,B,C, or D

Accessories, Options & Packaging

Emergency Battery: Integral EM battery option provides 90-minutes of emergency lighting. Design lumen output: 2000lm at 5000K 80CRI.

Packaging: Standard packaging is job pack / bulk pack consisting of 1 to 4 fixtures per package reducing unpack time at the jobsite.

Single Pack (for stocking) – Option 1PK

Wire guards: White painted wire guard for added protection. Easy field installation. SKU# 93095697
Two kits needed for 8ft fixtures

Continuous Run: One starter kit needed per run. SKU# 93095878. Each kit includes endcaps, starter whip, and male/female orientation adapter.

Design Life & Warranty

- **Reliability Testing:** Components and/or systems evaluation at extreme conditions and monitored during production.
- **System Warranty:** 5 Year

GE current
a Daintree company

GE and the GE Monogram are trademarks of the General Electric Company and are used under license. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions, and Current makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions. © 2020 GE Current, a Daintree company

www.gecurrent.com | ALB067 (Rev 01/30/20)