

AP LS1 - Selectable Post-Top



CONTRACTOR XP



(Images are shown for illustration purposes only)

Project:

Product #:

Type:

KEY FEATURES

- Power & CCT selectable, long lasting post-top.
- Controls enabled.
- 10 year warranty.
- Available in dark bronze, white, and black.
- 0-10V dimming.



SPECIFICATIONS

Housing

Die-cast aluminum housing for durability.

Ambient Temperature

Suitable for use in -40° C to 45° C (-40° F to 113° F).

Finish

Dark bronze (default, white, and black).

Mounting

Pole mount - slips over a 2 3/8" or 3" tenon. Suitable for heights between 8-20 ft.

Efficacy

Up to 151 lumens per watt.

Lumen Output

Selectable: 6,800 - 17,300 Lm.

CCT and CRI

Selectable: 3000K, 4000K, 5000K - 70 CRI

Warranty

10-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard voltage 120-277V. HVU 347-480V. 0-10V dimming driver standard for 10% to 100% dimming capabilities.

Certifications

UL Listed for wet locations. IP65 rated. FCC compliant. Design Lights Consortium® (DLC) 5.1 Premium qualified product.

ORDERING GUIDE

Example: **AP LS1 G1 FSK**

Fixture Type	Selectable Lumen Output	Generation	Voltage	CCT	Finish
• AP LED Post Top	• LS1 6,800 Lm / 45 W 10,300 Lm / 70 W 12,500 Lm / 87 W 17,300 Lm / 130 W	• G1 First Generation	• BLANK 120-277V • HVU 347-480 V	• FSK 3000K 4000K 5000K - CRI 70	• BLANK Dark Bronze • B Black • W White

For stocking opportunities please reach out to your local SLG Lighting rep or contact sales@slgus.com.

Leadtimes may vary based on current inventory levels - always consult your local SLG Lighting rep for leadtimes and project needs.

ACCESSORIES

Controls

- **PC UNV B3**
Button Photocell (120-277)
- **MS-DCI-01**
Motion Sensor
L3 20ft Lens
L7 40ft Lens
- **RM-51**
Remote control for motion sensor


Accessories shown are generally stocked items, for additional accessories questions and options please contact your local SLG Lighting rep or email sales@slgus.com. Options for spec needs available through special request - please contact sales@slgus.com with spec needs and project size.

PERFORMANCE INFORMATION

Series Number	Power Setting	Wattage	Lumens (3000K)	Lumens (4000K)	Lumens (5000K)
AP LS1 G1 FSK	Max	130 W	16,000 Lm	17,300 Lm	16,600 Lm
	High	87 W	11,500 Lm	12,500 Lm	12,000 Lm
	Medium	70 W	9,800 Lm	10,300 Lm	10,000 Lm
	Low	45 W	6,600 Lm	6,700 Lm	6,700 Lm

Performance data based on vigorous, industry standard testing and has been verified by lab results.

PHOTOMETRIC

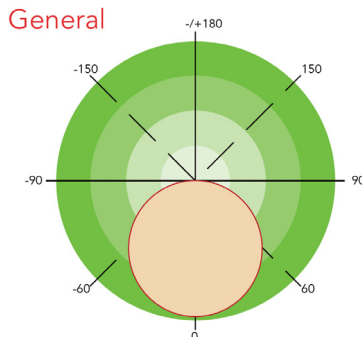

Due to continuous product improvements, specification and/or equipment updates may change without notice.

EPA

Product number	EPA
AP LS1 G1 FSK	0.9696