



ProLED B11 Chandelier

Specifications

- High power LED for maximum efficiency
- Up-to 87% energy savings
- Cream, Chrome & Brass base options (3W)
- Dimmable to 5% for design flexibility (3W & 5W)
- Up-to 40,000 hour life, 16 times longer than traditional lamps
- 2700K CCT
- 82 CRI for quality and consistent color rendering
- Omnidirectional distribution
- ENERGY STAR listed options
- No Mercury or UV/IR emissions
- RoHS Compliant
- 5-Year Limited Warranty



Markets & Applications

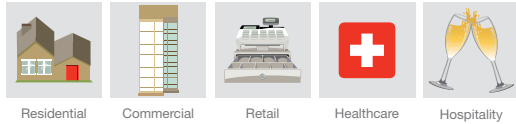

Ordering Information




Watt	Base	Product #	Product Code	Description	Volts	Color Temp.	CRI	Lumens	Useful Life*	Pkg. Qty.	MOL	Wattage Equivalent
3 Watt	Cand.	80094	B11CL3/827/LED	Cream Finish	120	2700	82	180	25000	1/10	3.78"	25
3 Watt	Cand.	80789	B11CL3/827/BR/LED	Brass Finish	120	2700	82	180	25000	1/10	3.78"	25
3 Watt	Cand.	80790	B11CL3/827/CHR/LED	Chrome Finish	120	2700	82	180	25000	1/10	3.78"	25
5 Watt	Cand.	80820	B11CL5/827/LED	Cream Finish	120	2700	82	300	25000	1/10	3.78"	40
5 Watt	Med.	80168	B11CL5/827/E26/LED	Cream Finish	120	2700	82	300	25000	1/10	3.78"	40

* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point at decreased light levels. May not be compatible with all dimming systems, dimming performance may vary by system, please visit www.halcolighting.com/ProLEDdim for dimmer compatibility information. Use on incompatible systems may shorten lamp life.
 Represents lamps that are ENERGY STAR approved.

Energy Savings Comparison

Total Lifetime Costs

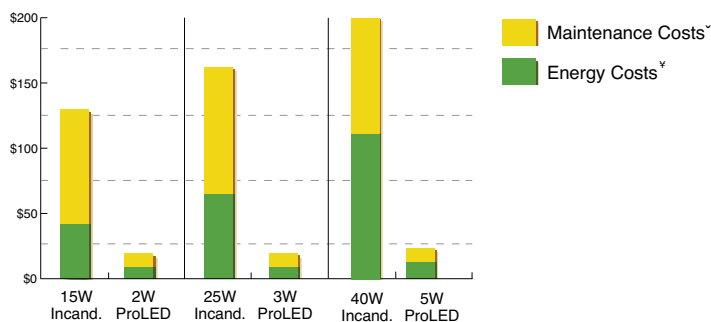

~ Maintenance costs based on 15 minutes to replace the lamp at \$40 per/hr over the life of the ProLED lamp.
 * Energy costs based on \$0.11 kWh over 40,000 hour life.