


4

5

DWG NO. 1000014 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

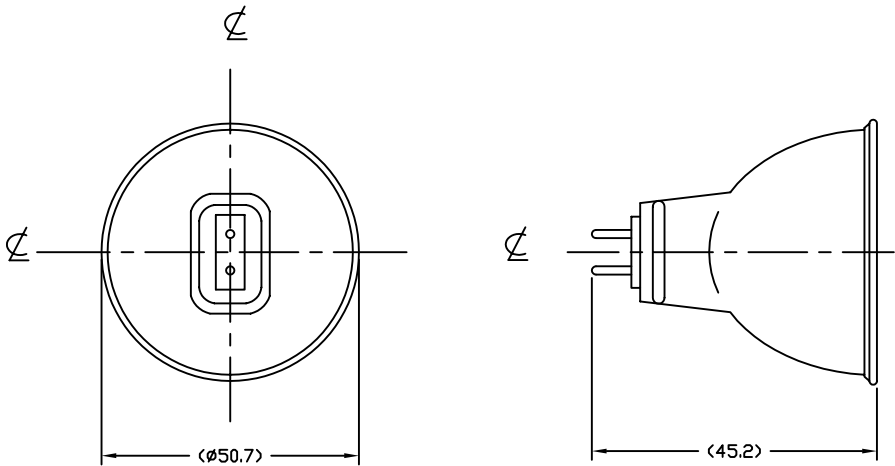

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING MATERIAL COMPOSITE FINISH			CONTRACT NO.		
			APPROVALS		
			DATE		
			DRAWN R.AMPARO 11/08/99		
			CHKD D.GILCZYNSKI 11/08/99		
			ENGR		
			MFG		
			QUAL		
			DSGN ACTVY		
			GOVT ACTVY		
			TITLE		
			USHIO AMERICA, INC.		
			5440 Cerritos Avenue Cypress, CA 90630		
			SIZE		
			B		
			CODE IDENT NO.		
			BAB		
			DWG NO.		
			1000014		
			SCALE		
			NONE		
			WEIGHT		
			SHEET		
			1 OF 1		

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	20 W
COLOR TEMP	2950 K
AVERAGE LIFE	4000 HRS
BASE TYPE	GU5.3
MAX CP	600 cd
FILAMENT TYPE	C-8
BURN POSITION	Any

NEXT ASSY	USED ON
APPLICATION	