


4

3

DWG NO. 1000018 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

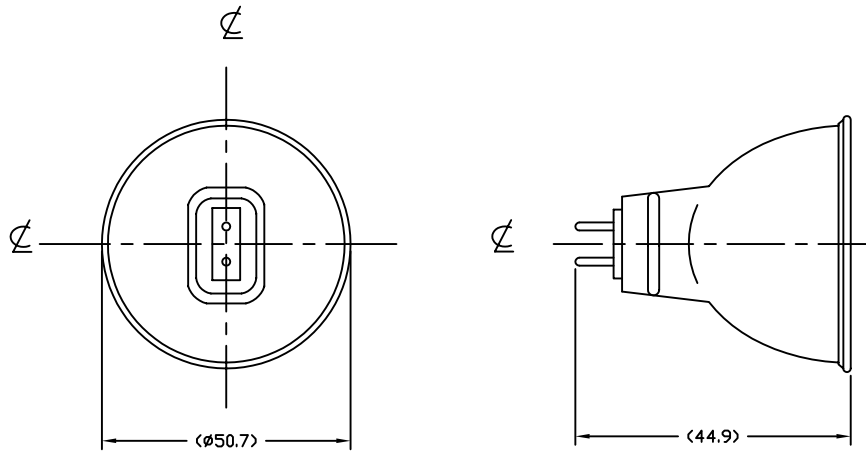

- NOTES:
- 1. ALL DIMENSIONS ARE IN MM.
 - 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 - 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	20 W
COLOR TEMP	2900 K
AVERAGE LIFE	3500 HRS
BASE TYPE	GU5.3
MAX CP	510 cd
FILAMENT TYPE	C-8
BURN POSITION	Any

NEXT ASSY	USED ON
	APPLICATION

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630	
		APPROVALS			
		DRAWN	R.AMPARO	09/07/99	
		CHKD	D.GILCZYNSKI	09/07/99	
		ENGR			
MATERIAL COMPOSITE		MFG			TITLE BAB/S JR12V-20W/FL/S
		QUAL			
		DSGN ACTVY			
FINISH		GOVT ACTVY			SIZE B
					CODE IDENT NO. BAB
					DWG NO. 1000018
					SCALE NONE
					WEIGHT
					SHEET 1 OF 1

4

3

2

1

CAD