
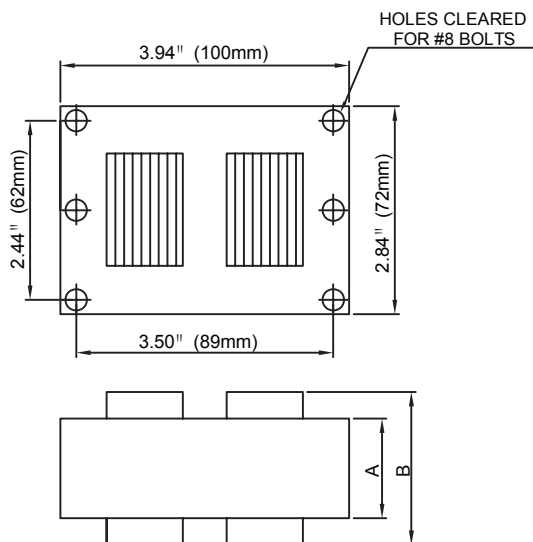


Plusrite®

CATALOG NUMBER: BALU150-HX/V4**150W S55****High Pressure Sodium Lamp Ballast
60 Hz HX-HPF****3X4CORE-HX,CWA&CWIUNITS****Capacitor:**


Microfarads: 14.0 uf
Volts (Max): 330 V
Case Temp(Max): 100°C
D: 1.65 in
L: 2.56 in
A: 0.63 in




Oil-Filled Capacitor

Ignitor:

Temp: 105 °C
BTL : 2 ft



Input Volts		120	208	240	277
Circuit Type	HX-HPF				
REGULATION					
Line Volts	±5%				
Lamp Watts	±10%				
LINE CURRENT(Amps)					
Operating		1.60	0.85	0.80	0.70
Open Circuit		2.80	1.60	1.40	1.25
Starting		1.60	0.85	0.80	0.70
RECOMMENDED FUSE (Amps)		7	4	4	4
TEMPERATURE RATINGS					
Insulation Class		H	H	H	H
Coil Temperature Code		D	B	C	C
Benchtop Coil Rise		86.3	79.6	83.9	83.5
Power Factor (Min)	90%				
Input Watts	188 W				
Current Crest Factor	1.50				
NOM. OPEN CIRCUIT VOLTAGE	120				
INPUT VOLTAGE AT LAMP DROPOUT		95	180	190	225
MIN AMBIENT STARTING TEMP	-40°F/-40°C				
60 HZ TEST PROCEDURES					
High Potential Test (Volts)					
1 Minute	2,000 V				
1 Second	2,500 V				
Open Circuit Voltage Test (V)	105 - 135				
Short Circuit Current Test (A)					
Secondary Current	Min 3.80				
	Max 4.70				
Input Current	Min	1.20	0.65	0.60	0.50
	Max	1.85	1.00	0.95	0.80
CORE and COIL Specifications					
Dimension A (in)	2.50				
Dimension B (in)	3.80				
Weight (lbs)	7.4				
Lead Lengths (in)	12				
CAPACITOR REQUIREMENT					
Microfarads	14.0 uf				
Volts (Min)	280 V				

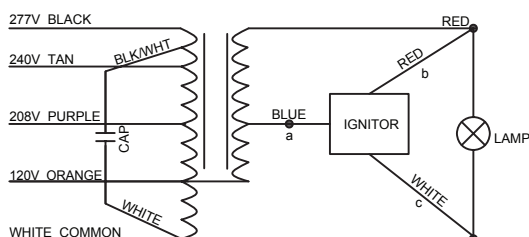Wiring Diagram:**c AL[®] US RoHS****ORDERING INFORMATION**

The ballast is prewired comes with a kit including capacitor, ignitor and bracket.

Data is based upon tests performed by Plusrite in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

Coil material: Cu/Al