

4


3

DWG NO. 1000037 SH 1

1

REVISIONS

REV	DESCRIPTION	DATE	APPROVED
-----	-------------	------	----------

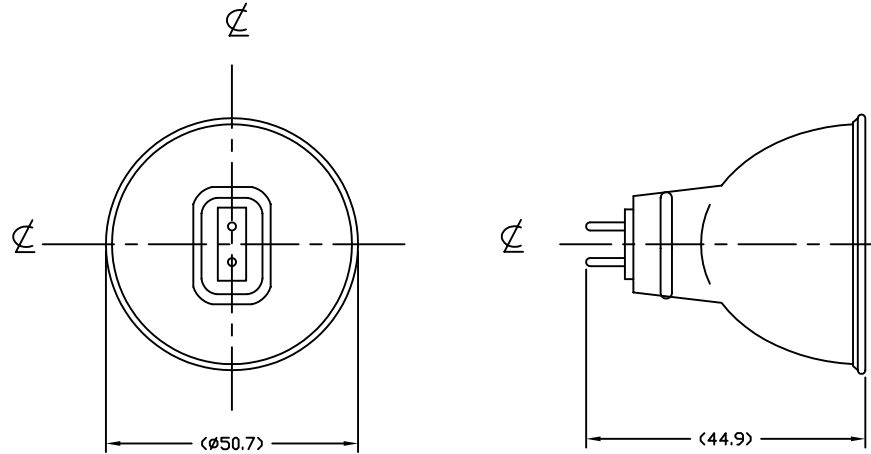

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING			CONTRACT NO.		
			APPROVALS DATE		
			DRAWN R.AMPARO	12/14/99	TITLE BBF/FG JR12V-20W/NFL/FG
			CHKD D.GILCZYNSKI	12/14/99	
			ENGR		
			MFG		
			QUAL		
MATERIAL COMPOSITE			DSGN ACTVY		SIZE B
FINISH			GOVT ACTVY		
			CODE IDENT NO. BBF		DWG NO. 1000037
			SCALE NONE		WEIGHT
					SHEET 1 OF 1

CHARACTERISTICS	
VOLTAGE	12 V
WATTAGE	20 W
COLOR TEMP	2950 K
AVERAGE LIFE	4000 HRS
BASE TYPE	GU5.3
MAX CP	1200 cd
FILAMENT TYPE	C-8
BURN POSITION	Any

NEXT ASSY	USED ON
APPLICATION	