


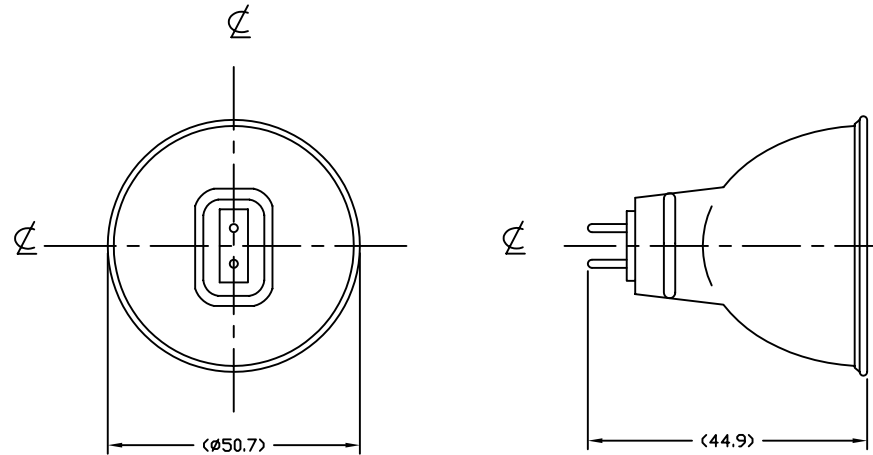

NOTES:

1. ALL DIMENSIONS ARE IN MM.
2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS			
VOLTAGE	12 V		
WATTAGE	20 W		
COLOR TEMP	2950 K		
AVERAGE LIFE	5000 HRS		
BASE TYPE	GU5.3		
MAX CP	870 cd		
FILAMENT TYPE	C-8	NEXT ASSY	USED ON
BURN POSITION	Any	APPLICATION	

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES DECIMALS .X ± - .XX ± - .XXX ± - ANGLES ± - DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING	CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630		
	APPROVALS		DATE		TITLE BBF/SL JR12V-20W/NFL/SL
	DRAWN	R.AMPARO	09/07/99		
	CHKD	D.GILCZYNSKI	09/07/99		
	ENGR				
	MFG				
	QUAL		SIZE	CODE IDENT NO.	DWG NO.
	COMPOSITE		B	BBF	1000043
	DSGN ACTVY				
GOVT ACTVY		SCALE	WEIGHT	SHEET	
		NONE		1 OF 1	