



LTR	REVISION	DATE	APPD
-	REFERENCE ONLY	06-03-05	

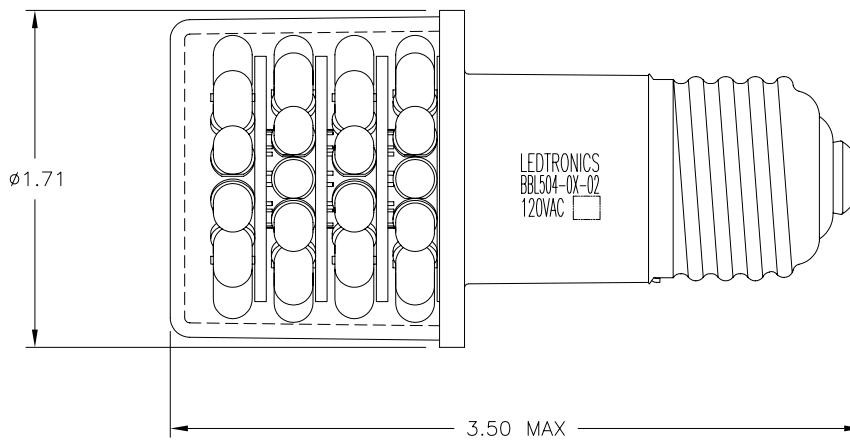

NOTES:

1. LENS MATERIAL: CLEAR UV POLYCARBONATE
2. SLEEVE MATERIAL: RYNITE FR530
3. BASE MATERIAL: NICKEL PLATED BRASS
4. OPERATING TEMPERATURE: Topr: -40°C TO +80°C PER LED
5. STORAGE TEMPERATURE: Tstg: -40°C TO +85°C PER LED

BBL504-01-02	RED	120VAC	23	660
BBL504-03-02	GREEN	120VAC	35	525
BBL504-05-02	BLUE	120VAC	35	470
LEDTRONICS PART NO.	COLOR EMITTED	VOLTS	mA	λP nm
		ELECTRICAL TEST		

 LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.		TITLE BBL504-0X-02			
	DWG NO BBL504004-CUST		SCALE 1:1		SHEET 1 OF 1	DATE 06-03-05
	CODE IDENT NO. 8Z410	DWG BY RM	CHK BY QA	MFG	CUSTOMER	
	.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32					