


LTR	REVISION	DATE	APPD
A	050418-GP01: UPDATED NOTES & TEST DATA	05-22-18	GP

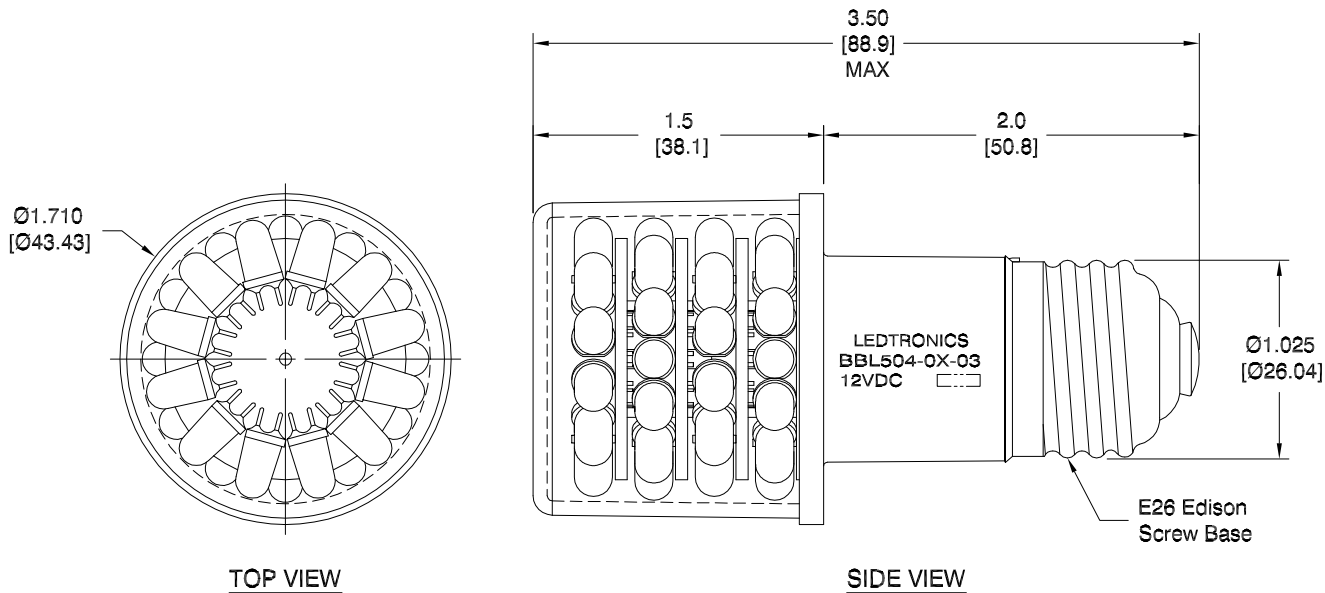

**NOTES:**

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. LENS MATERIAL / COLOR: UV POLYCARBONATE / CLEAR
3. SLEEVE MATERIAL: RYNITE FR530
4. BASE MATERIAL: NICKEL PLATED BRASS
5. AMBIENT OPERATING TEMPERATURE RANGE: ~-40°F to ~+176°F [~-40°C to ~+80°C]
6. WEIGHT: 0.12 lbs. / 2.0 oz.

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

**ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)**

BBL504-01-03	SUPER RED	12Vdc BP	2.16~2.4 W	0.180-0.200 A	-	-	633
BBL504-03-03	AQUA GREEN	12Vdc BP	2.16~2.4 W	0.130-0.150 A	-	-	518
BBL504-06-03	COOL WHITE	12Vdc BP	2.16~2.4 W	0.130-0.150 A	-	-	8000K
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	LIGHT OUTPUT PER LED Iv, CD	TOTAL LUMENS	$\lambda P$ nm COLOR TEMP. (K)

**-PROPRIETARY-**  
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5  
 .XX ± .025 (UNLESS OTHERWISE STATED)  
 ANGLES ± 0°,30'  
 FRACT. ± 1/32

TITLE							
<b>BBL504-0X-03</b>							
DWG NO	SCALE	SHEET	DATE				
BBL504019-CUST	1:1	1 OF 1	02-14-17				
CODE IDENT NO.	DWG BY GP	CHK BY	QA EE	MFG LD	R&D KS		
8Z410	02-14-17		05-23-18	05-23-18	05-23-18		