


LTR	REVISION	DATE	APPD
-	RELEASED	05-21-18	

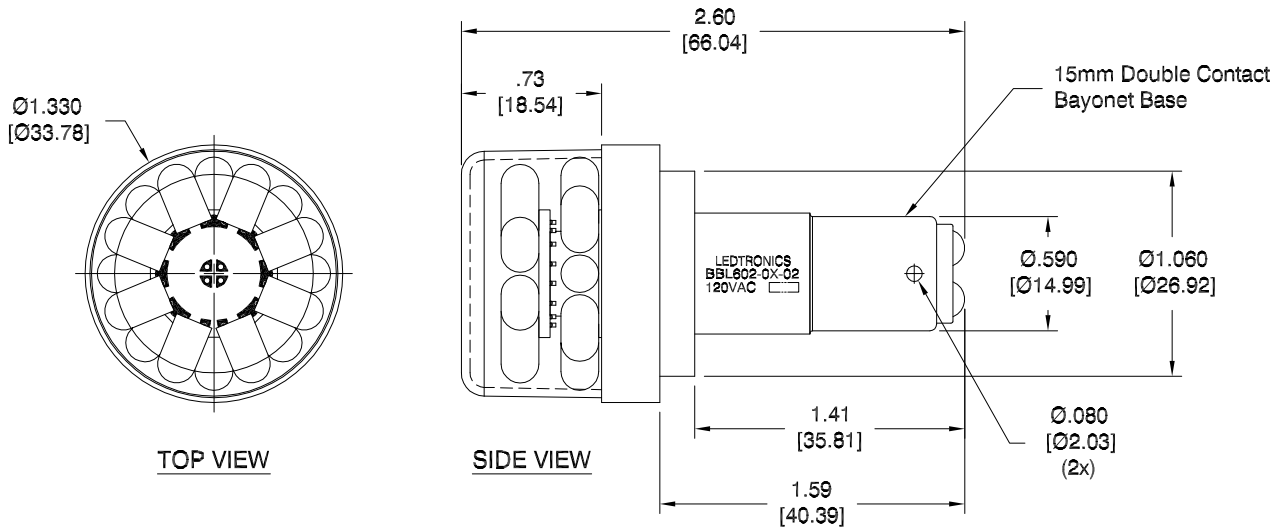

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. LENS MATERIAL / COLOR: POLYCARBONATE LEXAN 141 / CLEAR
3. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530.
4. BASE MATERIAL: NICKEL PLATED BRASS
5. AMBIENT OPERATING TEMPERATURE RANGE: ~-22°F to ~+122°F [~-30°C to ~+50°C]
6. WEIGHT: 0.05 lbs. / 0.8 oz.

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

BBL602-01-02	SUPER RED	120Vac	2.4 W	0.018-0.022 A	2.0cd	-	633nm
BBL602-02-02	SUPER ORANGE	120Vac	2.4 W	0.018-0.022 A	-	-	612nm
BBL602-03-02	AQUA GREEN	120Vac	1.8 W	0.017-0.021 A	10.0cd	-	521nm
BBL602-05-02	SUPER BLUE	120Vac	1.8 W	0.017-0.021 A	3.0cd	-	460nm
BBL602-06-02	COOL WHITE	120Vac	1.8 W	0.017-0.021 A	6.0cd	8000K	-
LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	LIGHT OUTPUT PER LED Iv, cd	COLOR TEMP. (K)	λP nm

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p>-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p>		<p>TITLE BBL602-0X-02</p>				
	<p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>		DWG NO	SCALE	SHEET	DATE	
			BBL602002-CUST	1:1	1 OF 1	05-21-18	
	CODE IDENT NO.	DWG BY GP	CHK BY	QA EE	MFG LD	R&D KS	
	8Z410	05-21-18		05-21-18	05-21-18	05-21-18	