



Double Ended Linear

Double Ended Linear BC150T3Q/CL 12/1

High-quality white light with superior lumen performanceHalogen Double Ended lamps provide bright, white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs. High lumen output provides light where you need it.

Product data


General Information	
Cap-Base	R7S [R7s]
Nominal Lifetime (Nom)	2000 h
Light Technical	
Initial lumen (Nom)	2400 lm
Correlated Color Temperature (Nom)	2900 K
Luminous Efficacy (Rated) (Nom)	16 lm/W
Color Rendering Index (Nom)	100
Operating and Electrical	
Power (Rated) (Nom)	150 W
Lamp Current (Nom)	1.25 A
Starting Time (Nom)	0.0 s
Voltage (Nom)	120 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear (CL)

Cap-Base Information	na [-]			
Approval and Application				
Energy Efficiency Label (EEL)	D			
Luminaire Design Requirements				
Bulb Temperature (Max)	900 °C			
Pinch Temperature (Max)	350 °C			
Product Data				
Order product name	Double Ended Linear BC150T3Q/CL 12/1			
EAN/UPC - Product	046677415617			
Order code	415612			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	12			
Material Nr. (12NC)	924884536301			
Net Weight (Piece)	0.006 kg			

Datasheet, 2016, October 10 data subject to change

Double Ended Linear

Dimensional drawing

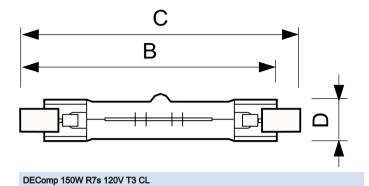

Product	D (max)	B (max)	В	B (min)	C (max)
Double Ended Linear	12 mm	76.5 mm	74.9 mm	73.3 mm	78.3 mm
BC150T3Q/CL 12/1					

